



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[41782 COVIA]**  
Machine Id  
**VOLVO L180C 61057**  
Component  
**Rear Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP453820</b>	VCP239705	---
Sample Date		Client Info		<b>20 May 2024</b>	24 Apr 2020	---
Machine Age	hrs	Client Info		<b>4333</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	2000	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Not Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>106</b>	185	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	7	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>120	<b>6</b>	12	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>25</b>	34	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Boron	ppm	ASTM D5185m		<b>112</b>	110	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	2	---
Manganese	ppm	ASTM D5185m		<b>1</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>24</b>	53	---
Calcium	ppm	ASTM D5185m		<b>3962</b>	3778	---
Phosphorus	ppm	ASTM D5185m		<b>1137</b>	1156	---
Zinc	ppm	ASTM D5185m		<b>1549</b>	1563	---
Sulfur	ppm	ASTM D5185m		<b>4559</b>	3264	---
Visc @ 40°C	cSt	ASTM D445	55	<b>40.7</b>	42.6	---

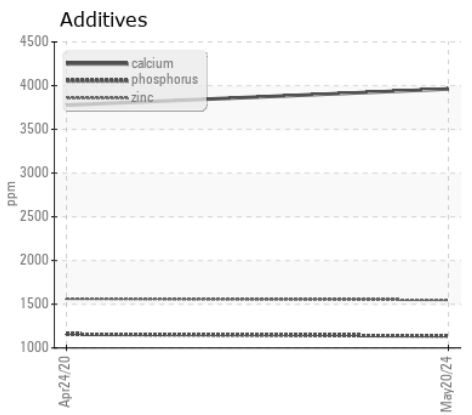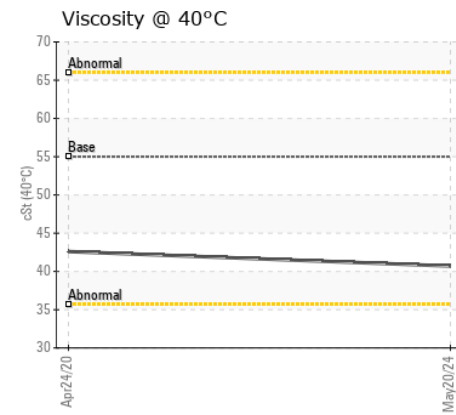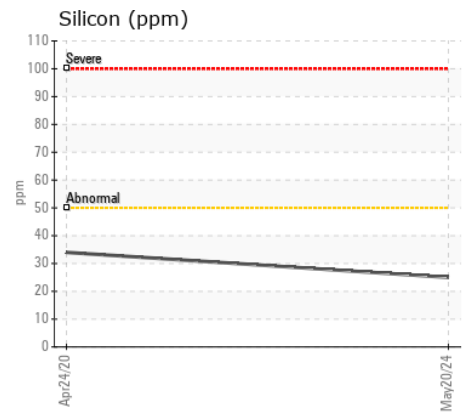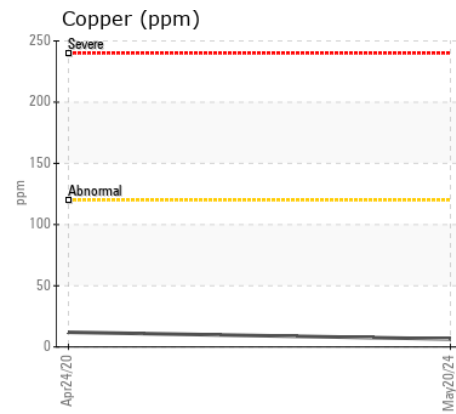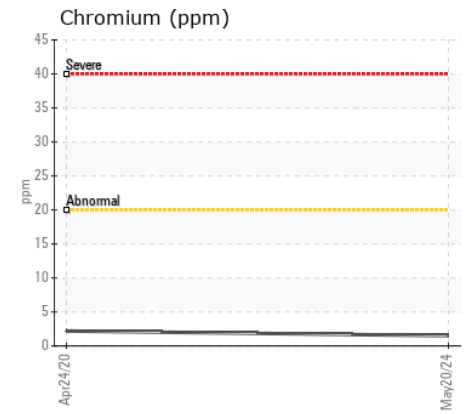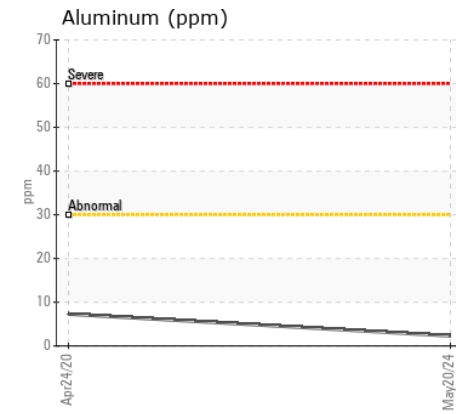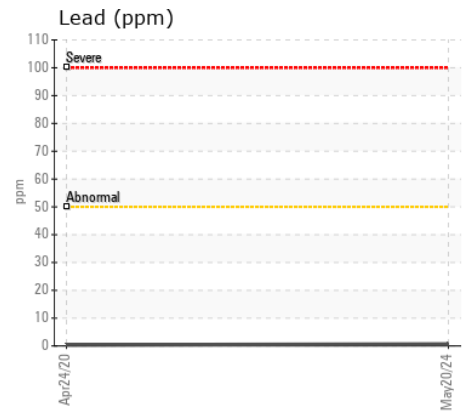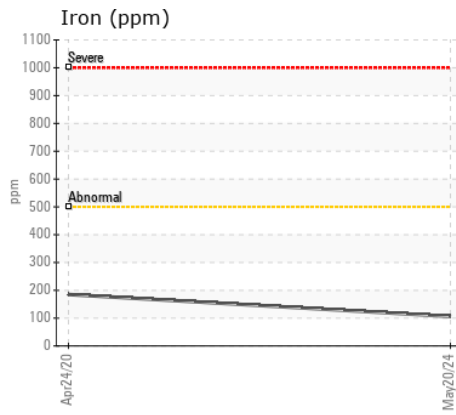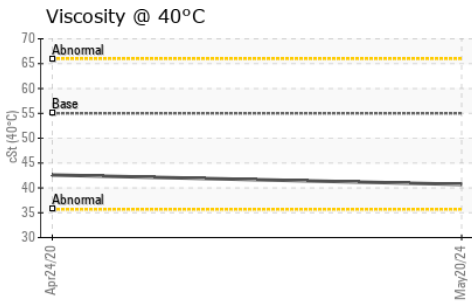

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP453820  
**Lab Number** : 06189558  
**Unique Number** : 11046310  
**Test Package** : MOB 1

**Received** : 23 May 2024  
**Tested** : 24 May 2024  
**Diagnosed** : 24 May 2024 - Wes Davis

**215 - ASCENDUM MACHINERY INC - CAYCE**  
 2303 AIRPORT BLVD  
 CAYCE, SC  
 US 29033

Contact: ROBBY HERLONG  
 robby.herlong@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (803)394-6783  
 F: (803)791-9920