



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SWA560052-10 ALTER]
 Machine Id
SENNEBOGEN 835 835.0.2949
 Component
Rear Right Final Drive
 Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP453538	VCP433765	VCP363687
Sample Date		Client Info		17 May 2024	01 Mar 2024	01 Nov 2022
Machine Age	hrs	Client Info		5900	5345	1872
Oil Age	hrs	Client Info		2000	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	209	124	34
Chromium	ppm	ASTM D5185m	>10	2	<1	0
Nickel	ppm	ASTM D5185m	>10	1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	2	0
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m	>50	8	6	11
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	7	6	2
Potassium	ppm	ASTM D5185m	>20	1	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	0
Boron	ppm	ASTM D5185m	379	152	112	96
Barium	ppm	ASTM D5185m	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185m	0.8	<1	0	0
Manganese	ppm	ASTM D5185m	0.0	3	1	<1
Magnesium	ppm	ASTM D5185m	31	2	2	<1
Calcium	ppm	ASTM D5185m	38	49	50	4
Phosphorus	ppm	ASTM D5185m	1077	1769	1930	1766
Zinc	ppm	ASTM D5185m	46	30	25	10
Sulfur	ppm	ASTM D5185m	23526	27169	27361	17927
Visc @ 40°C	cSt	ASTM D445	139	137	136	150

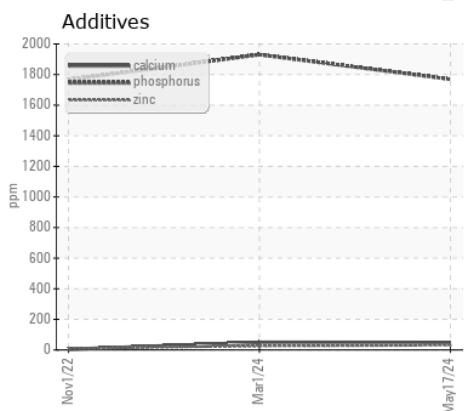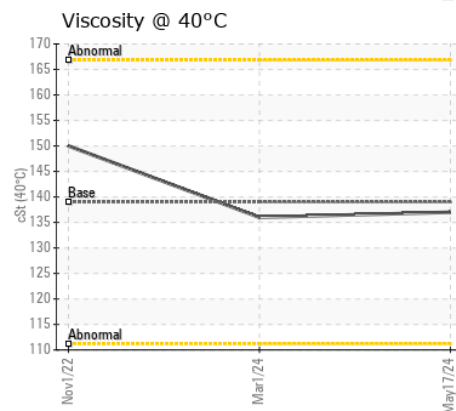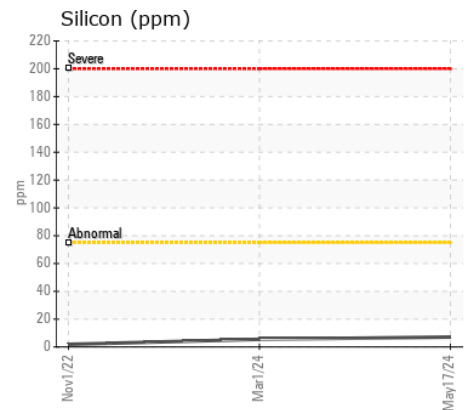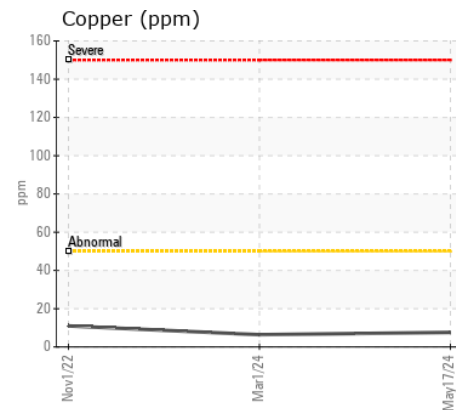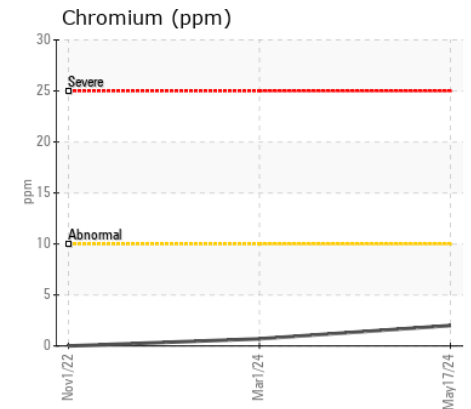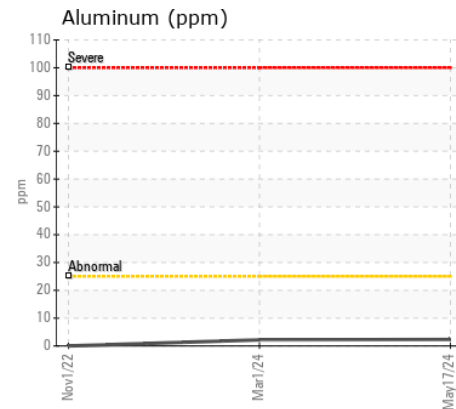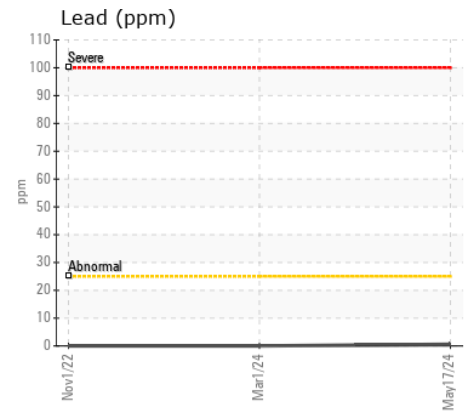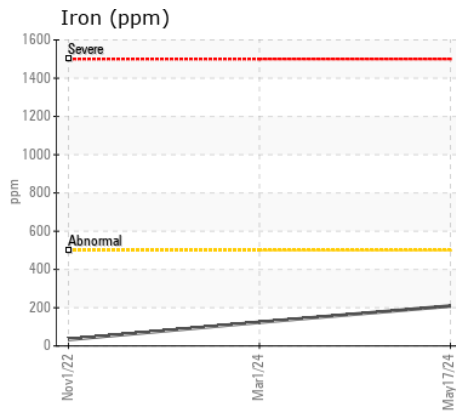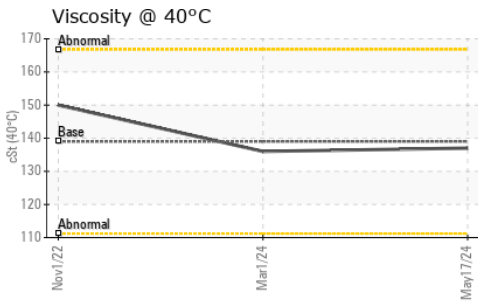

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP453538
Lab Number : 06189565
Unique Number : 11046317
Test Package : MOB 1

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

ALTA EQUIPMENT COMPANY
 1035 WYLIE DRIVE
 BLOOMINGTON, IL
 US 61705

Contact: JUSTIN PERRY
 justin.perry@altg.com

T: (309)533-9285

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)