



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
523
 Component
2 Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034728	DC0029596	---
Sample Date		Client Info		15 Apr 2024	28 Sep 2023	---
Machine Age	mls	Client Info		401509	397898	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>500	28	226	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	2	17	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>100	1	1	---
Tin	ppm	ASTM D5185m	>10	1	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>75	6	40	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	MODER	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	400	312	284	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	1	<1	---
Manganese	ppm	ASTM D5185m		<1	5	---
Magnesium	ppm	ASTM D5185m	12	4	6	---
Calcium	ppm	ASTM D5185m	150	37	33	---
Phosphorus	ppm	ASTM D5185m	1650	1708	1380	---
Zinc	ppm	ASTM D5185m	125	17	29	---
Sulfur	ppm	ASTM D5185m	22500	27253	24362	---
Visc @ 40°C	cSt	ASTM D445	109	87.8	111	---

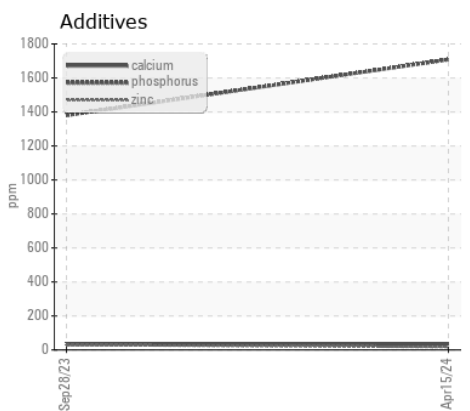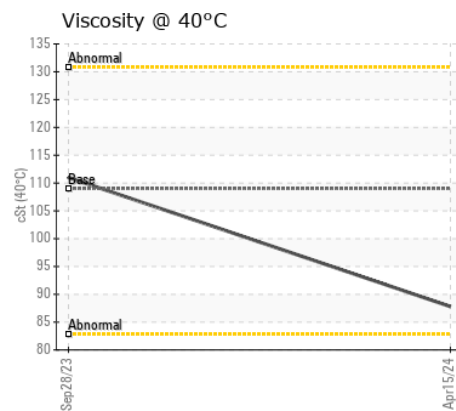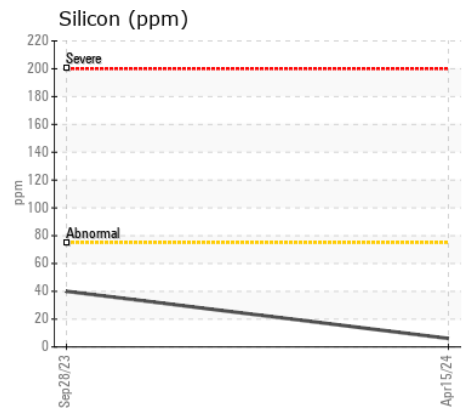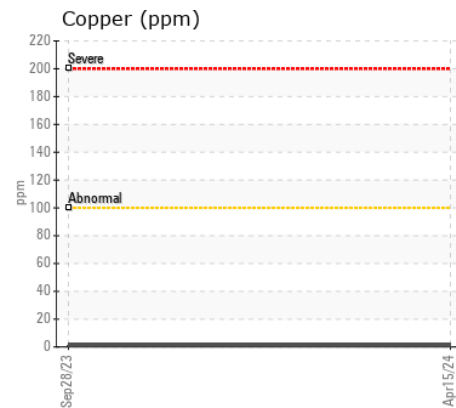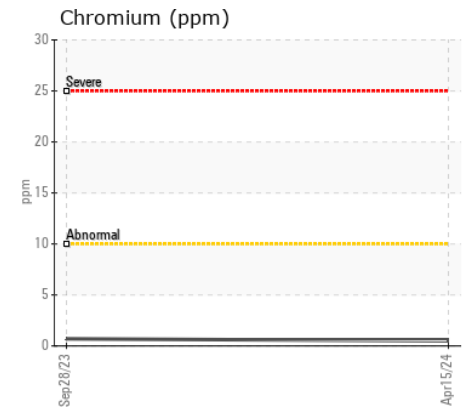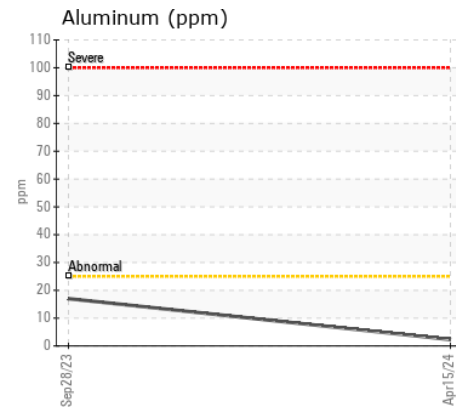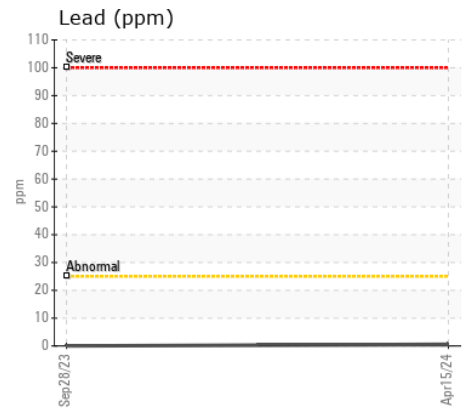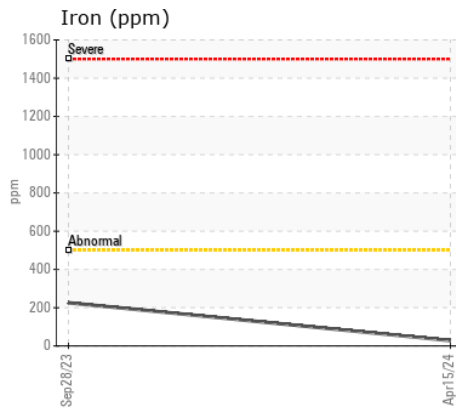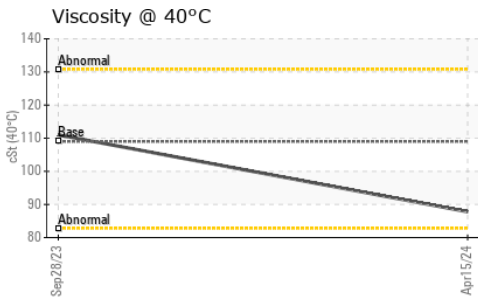

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0034728
Lab Number : 06189625
Unique Number : 11046377
Test Package : MOB 1

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

FRANCIS O DAY
 14900 SOUTHLAWN LN
 ROCKVILLE, MD
 US 20850
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: