



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[FA-168 PCE-PK2193]
 Machine Id
BEECH 300 300TN (S/N PK2193)
 Component
Left Turbine
 Fluid
BP TURBO OIL 2380 (10 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: FA-168 PCE-PK2193)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GF0001694	GF004220	---
Sample Date		Client Info		21 May 2024	11 Mar 2020	---
TSN	hrs	Client Info		1588	585	---
TSO	hrs	Client Info		1588	0	---
Oil Age	hrs	Client Info		1588	585	---
Filter Age	hrs	Client Info		552	585	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>15	1	<1	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>10	2	<1	---
Lead	ppm	ASTM D5185m		<1	<1	---
Copper	ppm	ASTM D5185m	>5	1	<1	---
Tin	ppm	ASTM D5185m	>5	1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	2	9	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.03	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m	0	0	<1	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	1	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	0	21	0	---
Calcium	ppm	ASTM D5185m	0	20	0	---
Phosphorus	ppm	ASTM D5185m	2500	2396	2523	---
Zinc	ppm	ASTM D5185m	0	21	<1	---
Sulfur	ppm	ASTM D5185m	0	57	178	---
Visc @ 40°C	cSt	ASTM D445	24.2	24.1	24.5	---

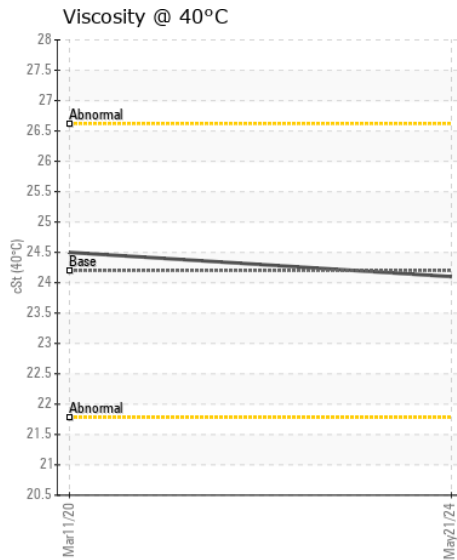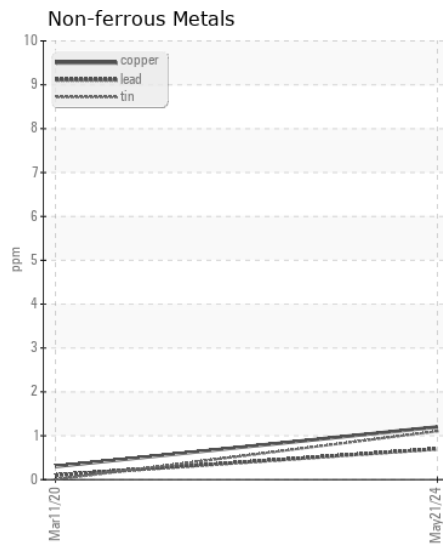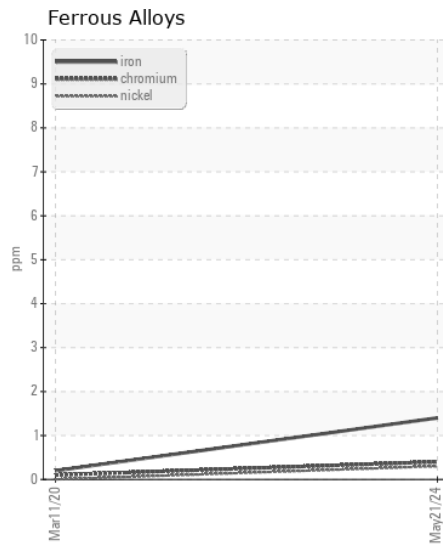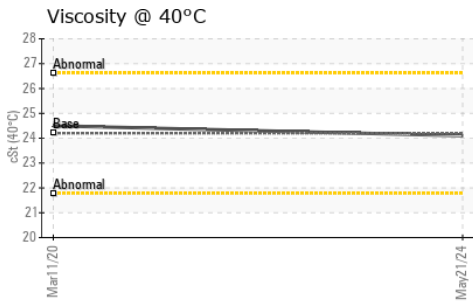

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GF0001694
Lab Number : 06189655
Unique Number : 11046407
Test Package : AVI 1

Received : 23 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Jonathan Hester

STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC
 1280 THUNDERBIRD DR
 SMYRNA, TN
 US 37167

Contact: PATRICK ISRAEL
 pisrael@stevensaerospace.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (615)365-2132
 F: (615)365-0966