



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Mx-6
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KFS0006091	KFS0002907	---
Sample Date		Client Info		18 May 2024	22 Nov 2023	---
Machine Age	hrs	Client Info		815	0	---
Oil Age	hrs	Client Info		500	428	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	7	30	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	<1	3	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	0	14	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	14	---
Potassium	ppm	ASTM D5185m	>20	0	▲ 135	---
Fuel		WC Method	>5	<1.0	1.6	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	0.0	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.8	8.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	16.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	5	---
Boron	ppm	ASTM D5185m		0	104	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		47	137	---
Manganese	ppm	ASTM D5185m		0	3	---
Magnesium	ppm	ASTM D5185m		920	94	---
Calcium	ppm	ASTM D5185m		1169	2581	---
Phosphorus	ppm	ASTM D5185m		1014	473	---
Zinc	ppm	ASTM D5185m		1113	569	---
Sulfur	ppm	ASTM D5185m		3390	3100	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	10.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	10.77	9.97	---
Visc @ 100°C	cSt	ASTM D445	15.6	12.8	● 10.2	---

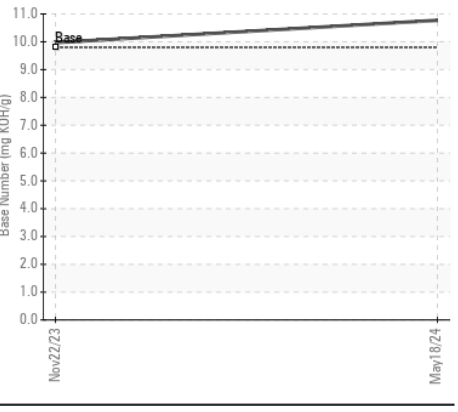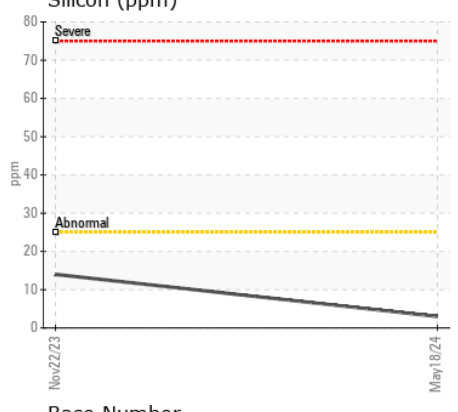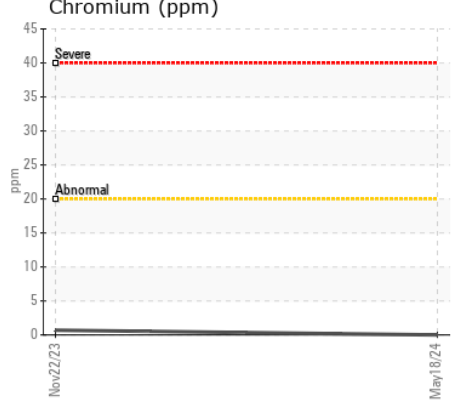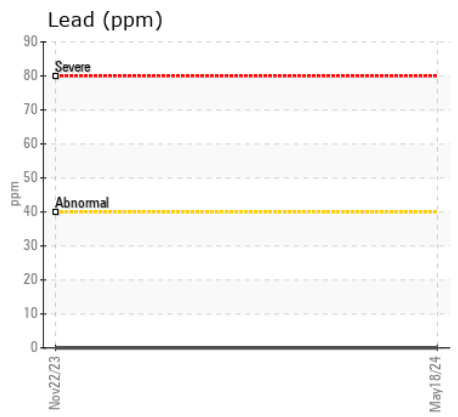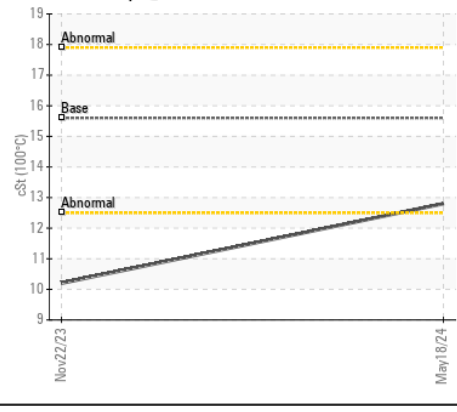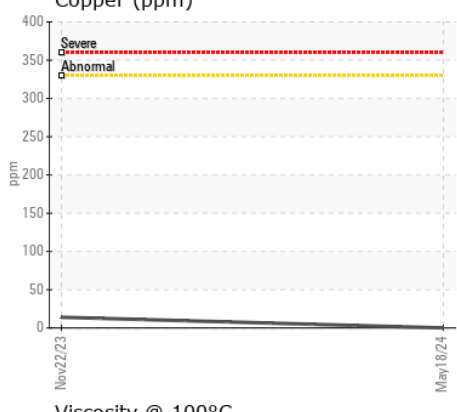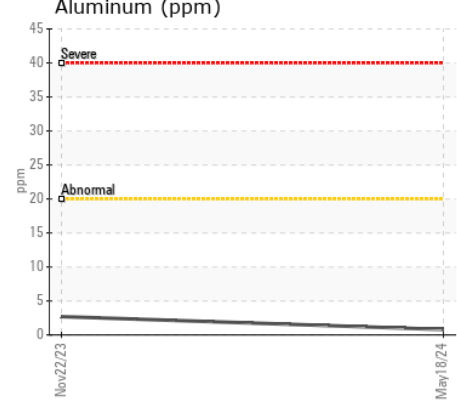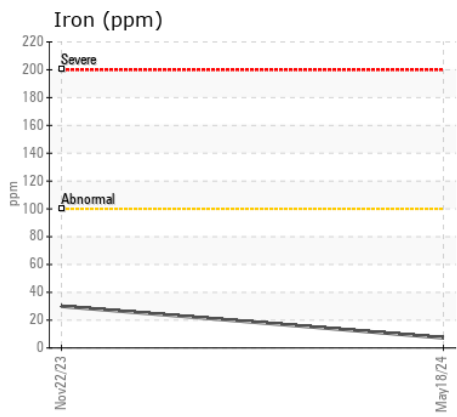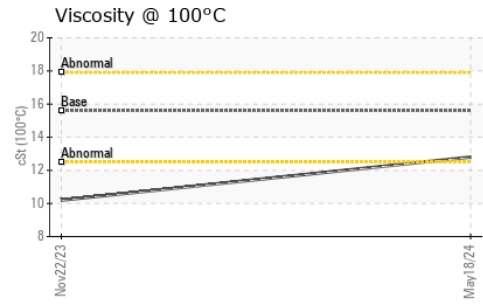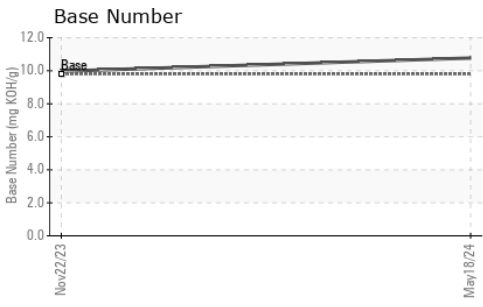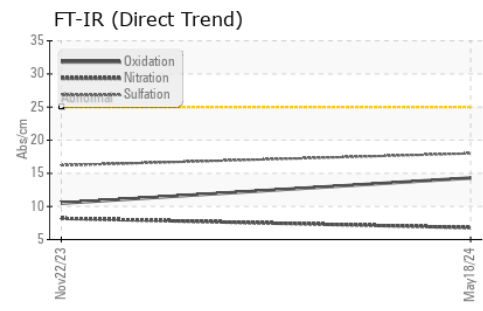

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0006091 **Received** : 23 May 2024
Lab Number : 06189771 **Tested** : 25 May 2024
Unique Number : 11046523 **Diagnosed** : 25 May 2024 - Wes Davis
Test Package : MOB 2

HARNES LLLC
 855 N JAMES CAMPBELL BLVD
 COLUMBIA, TN
 US 38401
 Contact: BEN HARNES
 ben@slectharness.com
 T: (615)733-4480
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)