



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[46991]
 Machine Id
JOHN DEERE 310E 1DW310EXJNF714255
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (37 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217647	JR0202983	JR0187860
Sample Date		Client Info		22 May 2024	01 Feb 2024	18 Sep 2023
Machine Age	hrs	Client Info		2439	1939	1448
Oil Age	hrs	Client Info		500	945	0
Filter Age	hrs	Client Info		0	945	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		81	208	110
Iron	ppm	ASTM D5185m	>500	79	277	175
Chromium	ppm	ASTM D5185m	>10	<1	2	1
Nickel	ppm	ASTM D5185m	>10	1	4	3
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	3	1
Lead	ppm	ASTM D5185m	>25	6	20	16
Copper	ppm	ASTM D5185m	>100	66	181	133
Tin	ppm	ASTM D5185m	>10	2	9	5
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	16	11
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	9	7
Boron	ppm	ASTM D5185m	6	15	40	40
Barium	ppm	ASTM D5185m	0	0	1	0
Molybdenum	ppm	ASTM D5185m	0	5	3	3
Manganese	ppm	ASTM D5185m		7	22	18
Magnesium	ppm	ASTM D5185m	145	102	88	85
Calcium	ppm	ASTM D5185m	3570	3253	3509	3476
Phosphorus	ppm	ASTM D5185m	1290	955	1136	1037
Zinc	ppm	ASTM D5185m	1640	1168	1302	1289
Sulfur	ppm	ASTM D5185m		4168	3325	4137
Visc @ 40°C	cSt	ASTM D445	57.0	58.82	56.3	57.3

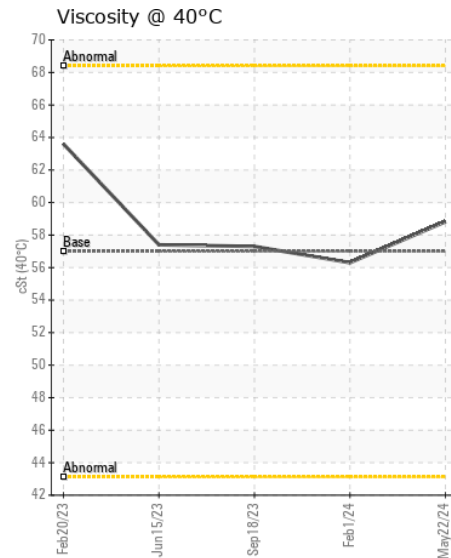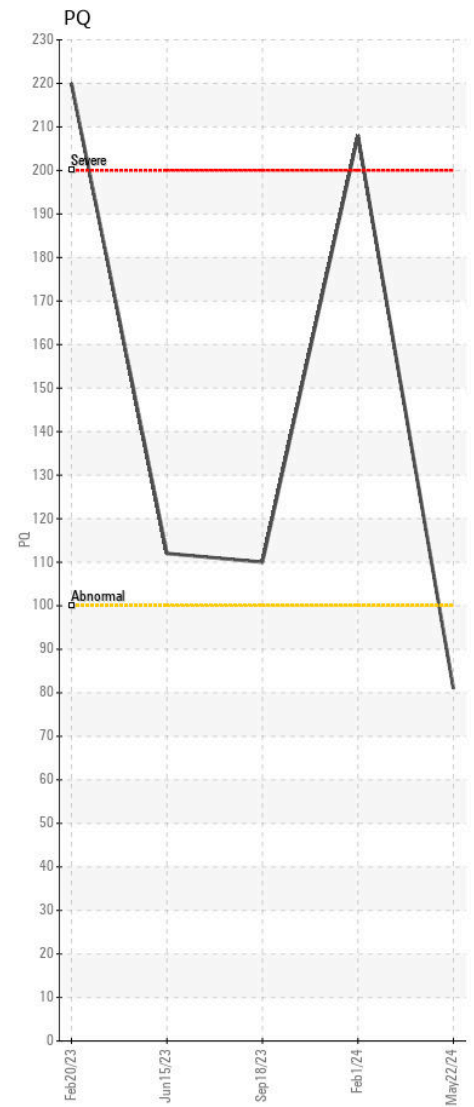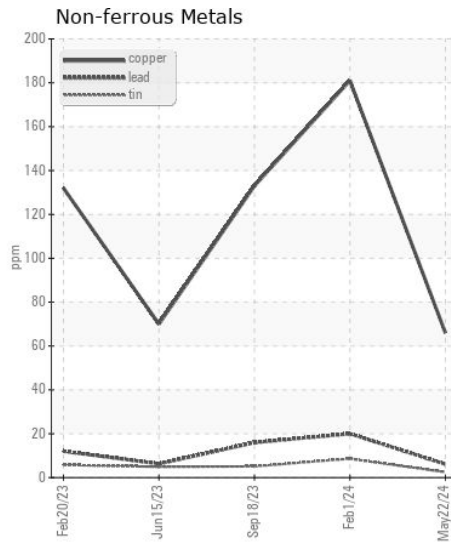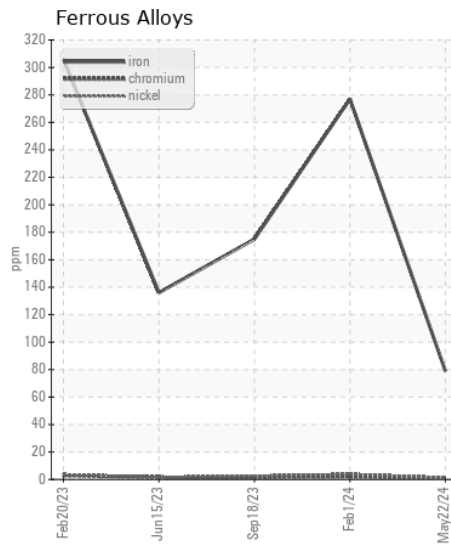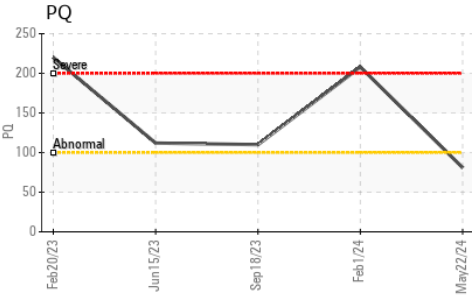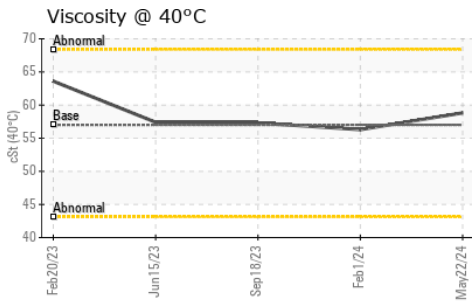

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217647 **Received** : 23 May 2024
Lab Number : 06189809 **Tested** : 31 May 2024
Unique Number : 11046561 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136

Contact: DANNY HUFF
 dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605