



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
137
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0905876	WC0727354	---
Sample Date		Client Info		16 May 2024	04 Jan 2023	---
Machine Age	mls	Client Info		89813	5000	---
Oil Age	mls	Client Info		5000	5000	---
Filter Age	mls	Client Info		5000	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	29	25	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	6	6	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	3	1	---
Tin	ppm	ASTM D5185m	>15	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	5	---
Potassium	ppm	ASTM D5185m	>20	5	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	19.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	1	---
Boron	ppm	ASTM D5185m		12	6	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		69	61	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		1005	811	---
Calcium	ppm	ASTM D5185m		1201	1232	---
Phosphorus	ppm	ASTM D5185m		1007	954	---
Zinc	ppm	ASTM D5185m		1312	1258	---
Sulfur	ppm	ASTM D5185m		3167	3430	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	16.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.3	7.2	---
Visc @ 100°C	cSt	ASTM D445	15.6	12.8	12.7	---

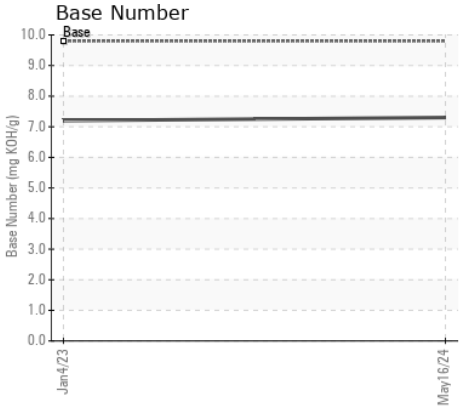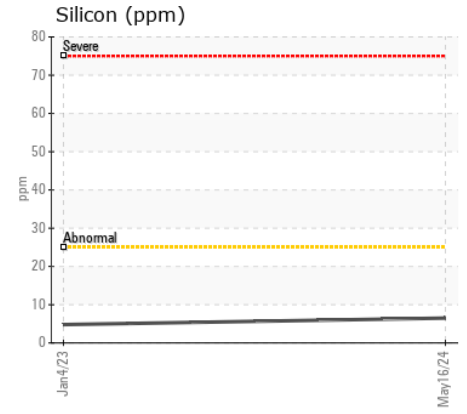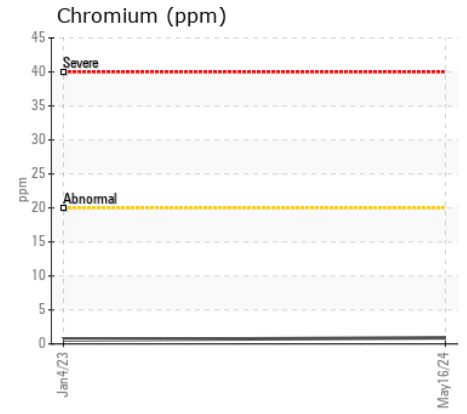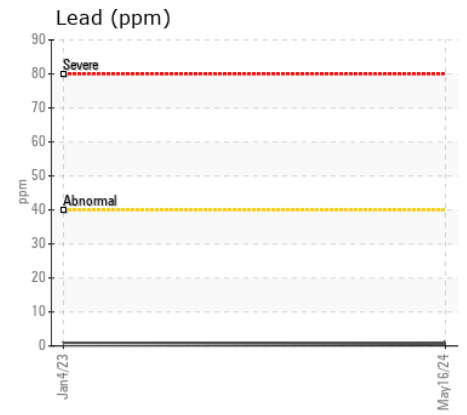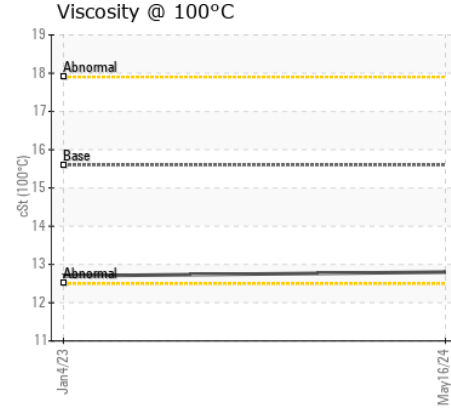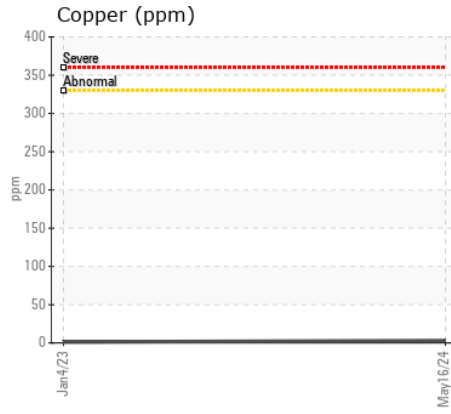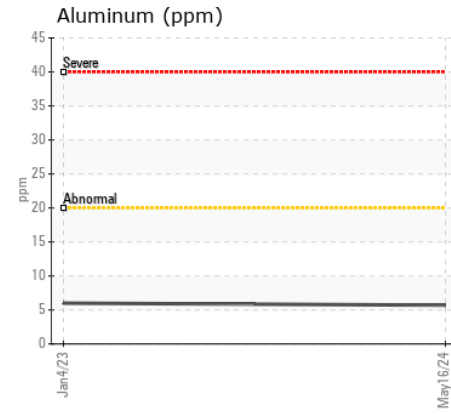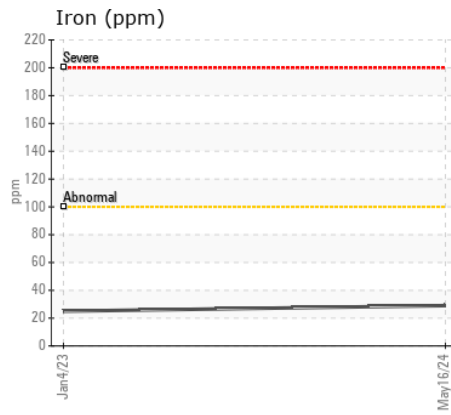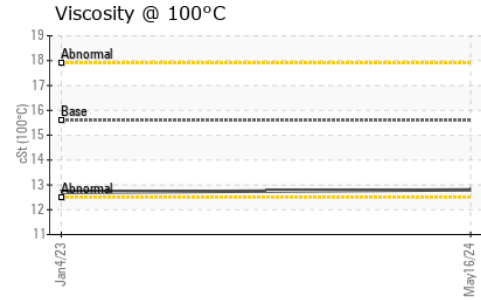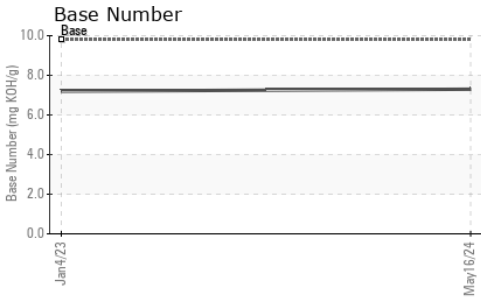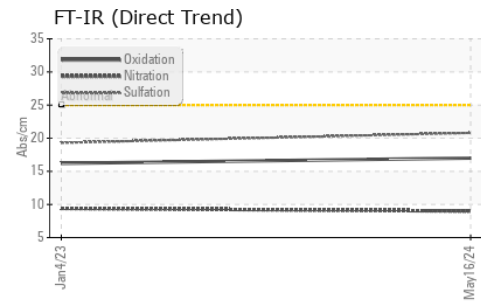

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905876
Lab Number : 06189972
Unique Number : 11046724
Test Package : MOB 1 (Additional Tests: TBN)

Received : 23 May 2024
Tested : 25 May 2024
Diagnosed : 25 May 2024 - Wes Davis

WAYNE CO SCHOOL BUS GARAGE
 1603 SALEM CHURCH RD
 GOLDSBORO, NC
 US 27530

Contact: BRANDON BRIGGS
 brandonbriggs@wcps.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: