



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
T1960
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0900488	WC0828986	PCA0076221
Sample Date		Client Info		06 May 2024	10 Oct 2023	26 Aug 2022
Machine Age	mls	Client Info		213520	0	154023
Oil Age	mls	Client Info		20000	0	0
Filter Age	mls	Client Info		20000	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	MARGINAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	41	38	21
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	1	0	0
Aluminum	ppm	ASTM D5185m	>20	5	4	4
Lead	ppm	ASTM D5185m	>40	3	2	3
Copper	ppm	ASTM D5185m	>330	3	1	1
Tin	ppm	ASTM D5185m	>15	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	7	6
Potassium	ppm	ASTM D5185m	>20	3	<1	0
Fuel		WC Method	>5	<1.0	▲ 2.5	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.5	9.4	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	22.7	25.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	3	2	<1
Boron	ppm	ASTM D5185m		51	194	193
Barium	ppm	ASTM D5185m		0	0	3
Molybdenum	ppm	ASTM D5185m		70	114	118
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		538	586	589
Calcium	ppm	ASTM D5185m		1623	1410	1478
Phosphorus	ppm	ASTM D5185m		869	661	693
Zinc	ppm	ASTM D5185m		1173	820	859
Sulfur	ppm	ASTM D5185m		3159	2339	2372
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	18.3	20.1
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	6.8	8.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	12.1	12.6

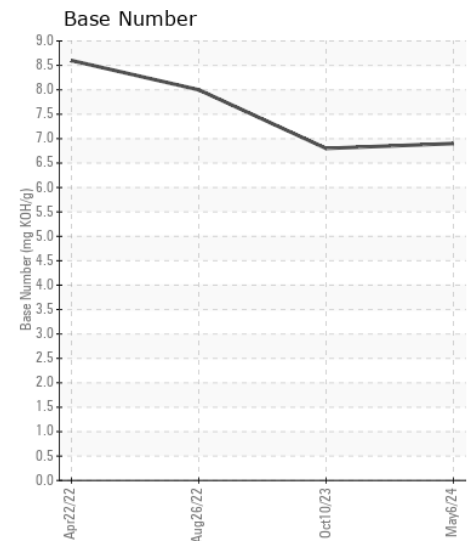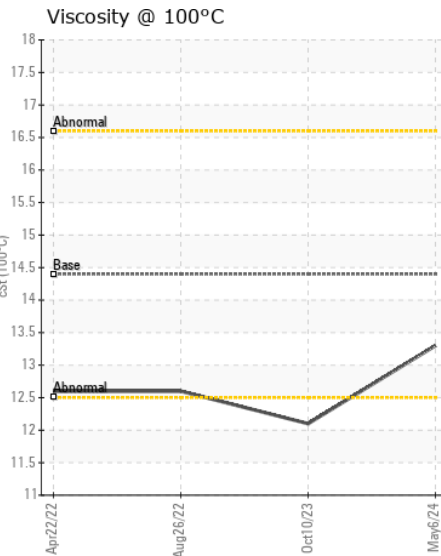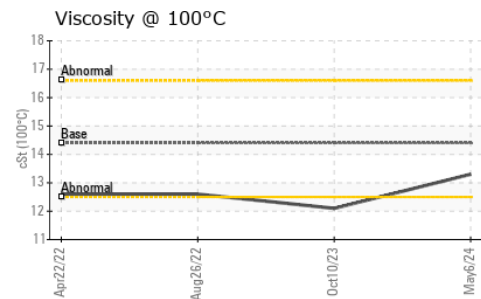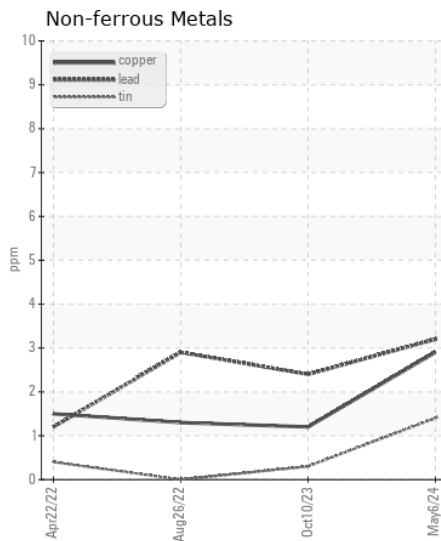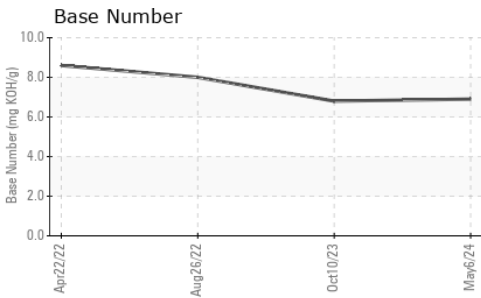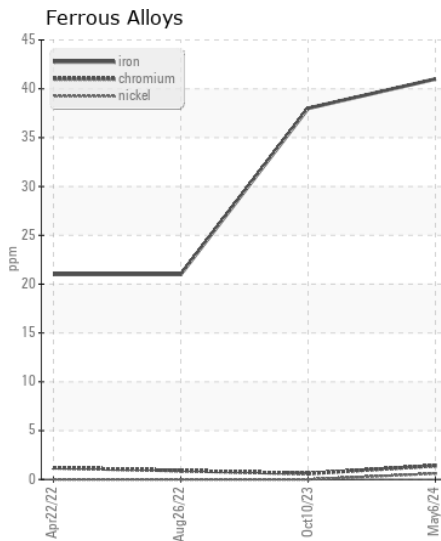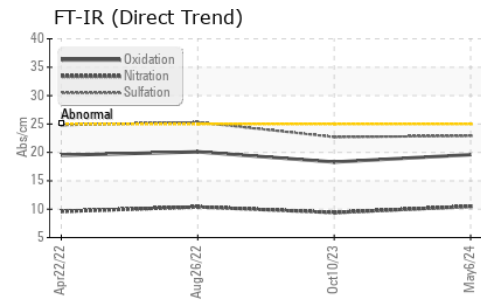

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900488
Lab Number : 06190012
Unique Number : 11046764
Test Package : FLEET
Received : 23 May 2024
Tested : 25 May 2024
Diagnosed : 25 May 2024 - Wes Davis

Ergon Trucking Inc. - MAR605
 35020 State Route 7
 Marietta, OH
 US 45768-5236
 Contact: JASON JULIAN

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: