



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2300
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0900502	WC0900499	WC0871361
Sample Date		Client Info		15 May 2024	11 Mar 2024	15 Jan 2024
Machine Age	mls	Client Info		211180	190000	171000
Oil Age	mls	Client Info		20000	20000	20000
Filter Age	mls	Client Info		20000	20000	20000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	12	14
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		2	<1	0
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	7	6	6
Lead	ppm	ASTM D5185m	>40	1	1	<1
Copper	ppm	ASTM D5185m	>330	1	1	<1
Tin	ppm	ASTM D5185m	>15	1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	8	6
Potassium	ppm	ASTM D5185m	>20	10	10	10
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.3	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	21.2	21.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	2	1	4
Boron	ppm	ASTM D5185m		167	43	31
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		100	59	56
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		644	472	517
Calcium	ppm	ASTM D5185m		1657	1551	1558
Phosphorus	ppm	ASTM D5185m		813	1025	1038
Zinc	ppm	ASTM D5185m		1067	1162	1244
Sulfur	ppm	ASTM D5185m		3108	3130	3070
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.2	16.8	17.2
Base Number (BN)	mg KOH/g	ASTM D2896		7.6	8.2	7.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	13.4	13.3

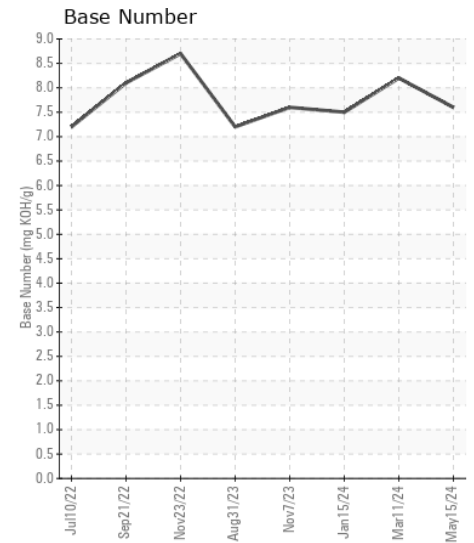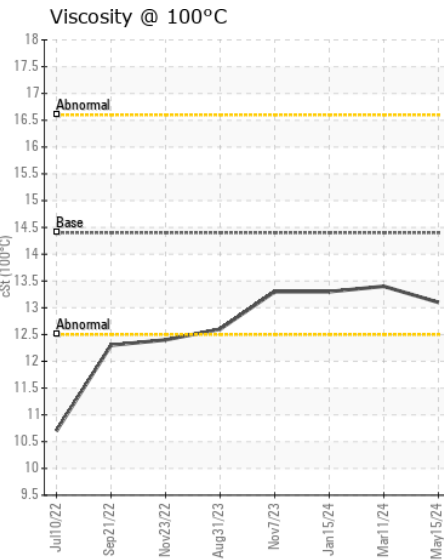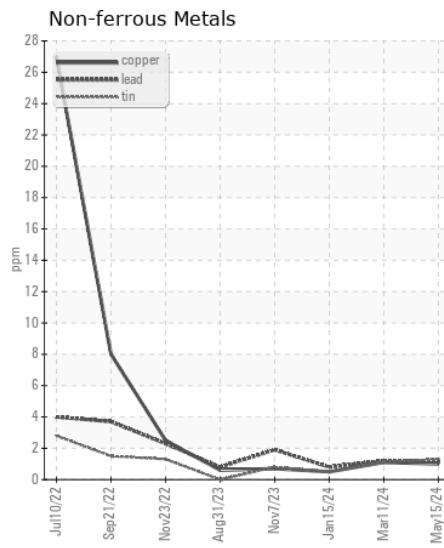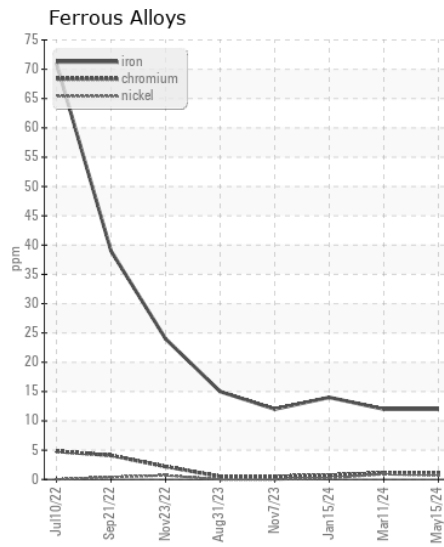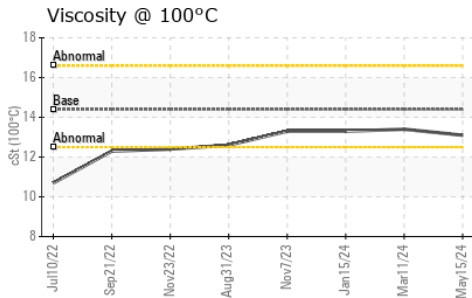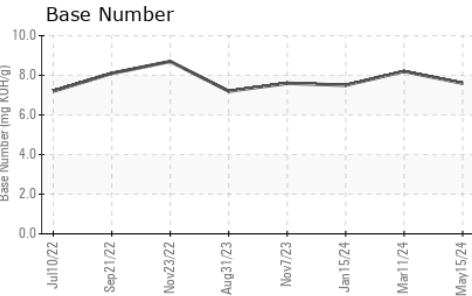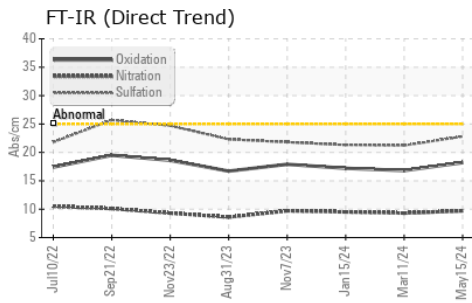

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900502
Lab Number : 06190014
Unique Number : 11046766
Test Package : FLEET
Received : 23 May 2024
Tested : 25 May 2024
Diagnosed : 25 May 2024 - Wes Davis

Ergon Trucking Inc. - MAR605
 35020 State Route 7
 Marietta, OH
 US 45768-5236
 Contact: JASON JULIAN

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: