



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**2319**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number  |     | Client Info |           | <b>WC0900503</b>   | PCA0076238  | ---      |
| Sample Date    |     | Client Info |           | <b>14 May 2024</b> | 18 Aug 2023 | ---      |
| Machine Age    | mls | Client Info |           | <b>75205</b>       | 37000       | ---      |
| Oil Age        | mls | Client Info |           | <b>20000</b>       | 18000       | ---      |
| Filter Age     | mls | Client Info |           | <b>20000</b>       | 18000       | ---      |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | ---      |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | ---      |
| Sample Status  |     |             |           | <b>NORMAL</b>      | ATTENTION   | ---      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |     |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron         | ppm    | ASTM D5185m | >100 | <b>20</b>    | 26   | --- |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>2</b>     | 3    | --- |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | 0    | --- |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | --- |
| Silver       | ppm    | ASTM D5185m | >3   | <b>1</b>     | 0    | --- |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>12</b>    | 25   | --- |
| Lead         | ppm    | ASTM D5185m | >40  | <b>2</b>     | 2    | --- |
| Copper       | ppm    | ASTM D5185m | >330 | <b>2</b>     | 6    | --- |
| Tin          | ppm    | ASTM D5185m | >15  | <b>2</b>     | <1   | --- |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | --- |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | --- |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | --- |

## CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |     |
|------------------|----------|-------------|-------|----------------|-------|-----|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>11</b>      | 13    | --- |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>26</b>      | 75    | --- |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | ▲ 2.0 | --- |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | --- |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | --- |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.4</b>     | 0.3   | --- |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.8</b>     | 10.2  | --- |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>22.1</b>    | 23.4  | --- |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | --- |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | --- |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | --- |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | --- |

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |        |     |
|------------------|----------|-------------|------|--------------|--------|-----|
| Sodium           | ppm      | ASTM D5185m | >50  | <b>3</b>     | 2      | --- |
| Boron            | ppm      | ASTM D5185m |      | <b>40</b>    | 99     | --- |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>     | 0      | --- |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>65</b>    | 120    | --- |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | 2      | --- |
| Magnesium        | ppm      | ASTM D5185m |      | <b>525</b>   | 623    | --- |
| Calcium          | ppm      | ASTM D5185m |      | <b>1658</b>  | 1454   | --- |
| Phosphorus       | ppm      | ASTM D5185m |      | <b>904</b>   | ● 622  | --- |
| Zinc             | ppm      | ASTM D5185m |      | <b>1213</b>  | ● 792  | --- |
| Sulfur           | ppm      | ASTM D5185m |      | <b>3025</b>  | ● 2224 | --- |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>18.5</b>  | 19.7   | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896  |      | <b>7.4</b>   | 6.2    | --- |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | <b>13.1</b>  | 12.2   | --- |

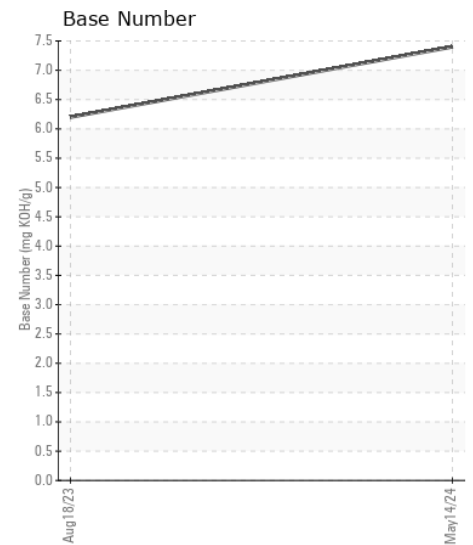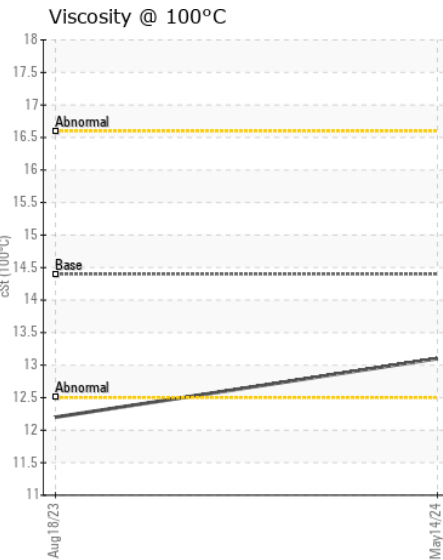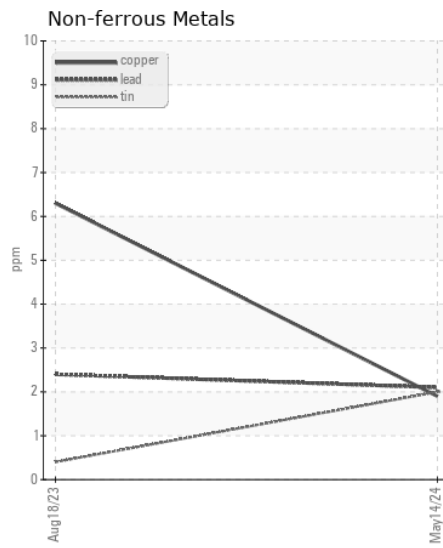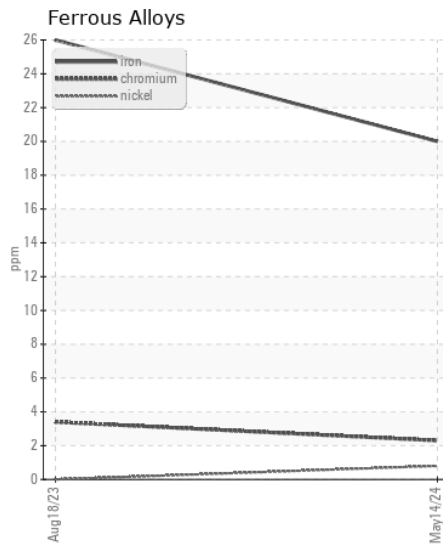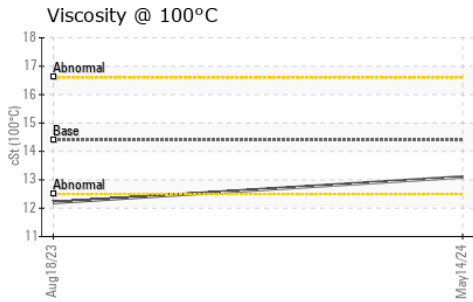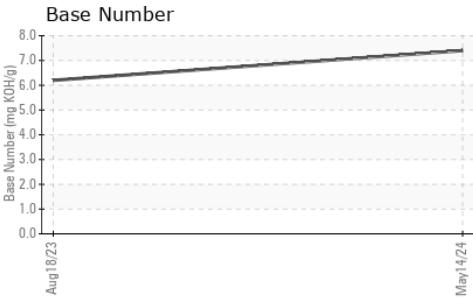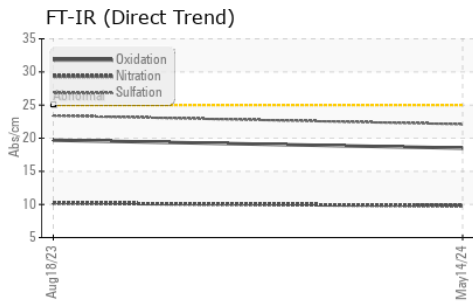

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0900503  
**Lab Number** : 06190015  
**Unique Number** : 11046767  
**Test Package** : FLEET  
**Received** : 23 May 2024  
**Tested** : 25 May 2024  
**Diagnosed** : 25 May 2024 - Wes Davis

**Ergon Trucking Inc. - MAR605**  
 35020 State Route 7  
 Marietta, OH  
 US 45768-5236  
 Contact: JASON JULIAN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: