



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KATHY AZLIN
Component
Port Main Engine
Fluid
CHEVRON DELO 400 SDE SAE 15W40 (165 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0067159	MW0067156	MW0057991
Sample Date		Client Info		07 May 2024	13 Apr 2024	19 Mar 2024
Machine Age	hrs	Client Info		63321	62806	62353
Oil Age	hrs	Client Info		968	453	1382
Filter Age	hrs	Client Info		497	453	679
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	4	2	5
Chromium	ppm	ASTM D5185m	>8	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	13	12	11
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	2	1	2
Lead	ppm	ASTM D5185m	>18	<1	0	<1
Copper	ppm	ASTM D5185m	>80	5	3	9
Tin	ppm	ASTM D5185m	>14	1	0	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	5	4	4
Potassium	ppm	ASTM D5185m	>20	4	1	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.8	7.1	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.7	18.0	18.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	10	6	6
Boron	ppm	ASTM D5185m		163	138	179
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		34	32	38
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		641	677	597
Calcium	ppm	ASTM D5185m		1795	1909	2171
Phosphorus	ppm	ASTM D5185m	760	683	790	812
Zinc	ppm	ASTM D5185m	800	877	919	973
Sulfur	ppm	ASTM D5185m	3000	3240	3856	4055
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	12.2	13.0
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.3	8.7	8.1
Visc @ 100°C	cSt	ASTM D445	14.6	14.0	13.9	13.9


FT-IR (Direct Trend)

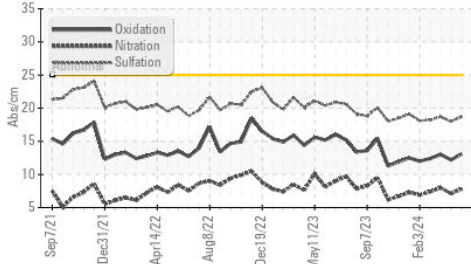


Base Number

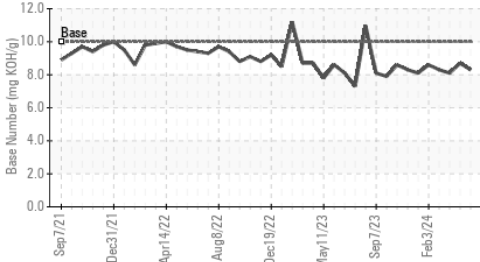


Viscosity @ 100°C

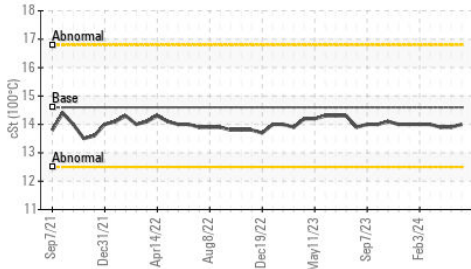


Ferrous Alloys

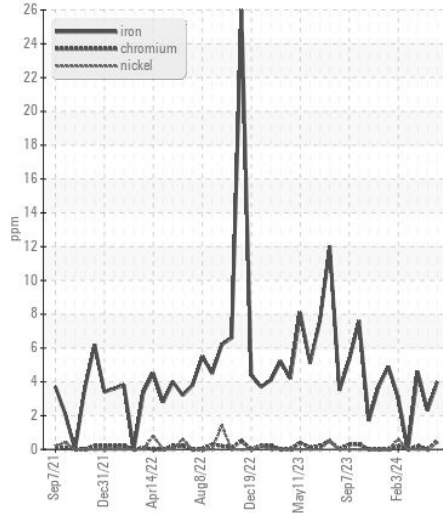


Non-ferrous Metals

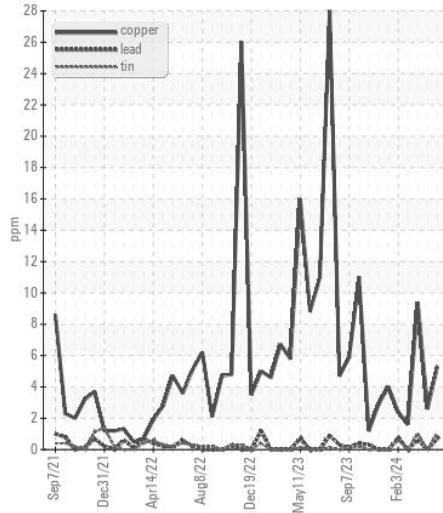

Viscosity @ 100°C

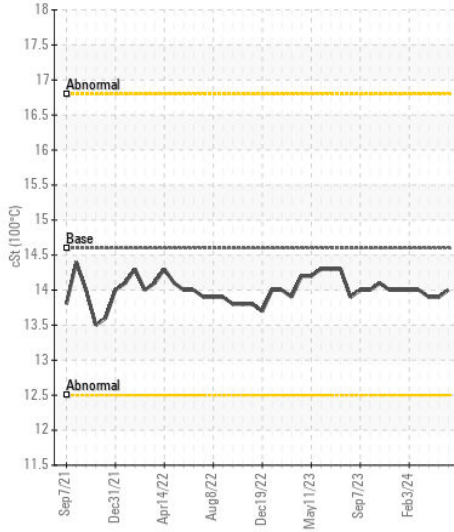

Base Number

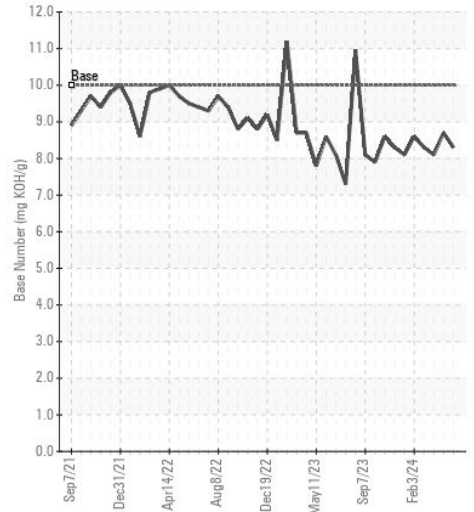

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0067159

Lab Number : 06190021

Unique Number : 11046773

Test Package : MAR 2

Received : 23 May 2024

Tested : 25 May 2024

Diagnosed : 29 May 2024 - Don Baldrige

MAGNOLIA MARINE TRANSPORT

697 HAINING ROAD

VICKSBURG, MS

US 39183

Contact: MMT MAINTENANCE PLANNERS

mmtmaintenanceplanners@ergon.com

T: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (601)638-8028