



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
[716614 SOUTHLAND]
 Machine Id
TAKEUCHI TB235 604814
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454915	---	---
Sample Date		Client Info		17 May 2024	---	---
Machine Age	hrs	Client Info		581	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	94	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	7	---	---
Lead	ppm	ASTM D5185m	>40	4	---	---
Copper	ppm	ASTM D5185m	>330	15	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	66	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel	%	ASTM D3524	>5	0.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>158	30	---	---
Boron	ppm	ASTM D5185m	250	41	---	---
Barium	ppm	ASTM D5185m	10	15	---	---
Molybdenum	ppm	ASTM D5185m	100	116	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	450	20	---	---
Calcium	ppm	ASTM D5185m	3000	4117	---	---
Phosphorus	ppm	ASTM D5185m	1150	1105	---	---
Zinc	ppm	ASTM D5185m	1350	1410	---	---
Sulfur	ppm	ASTM D5185m	4250	7588	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	12.1	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	9.9	---	---

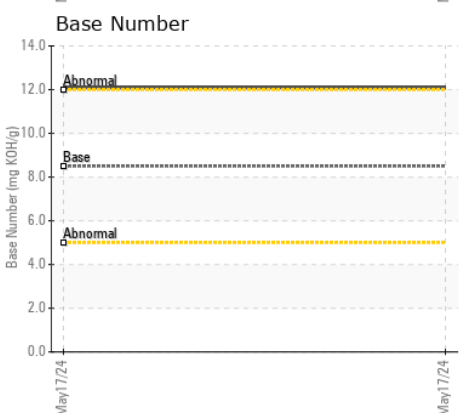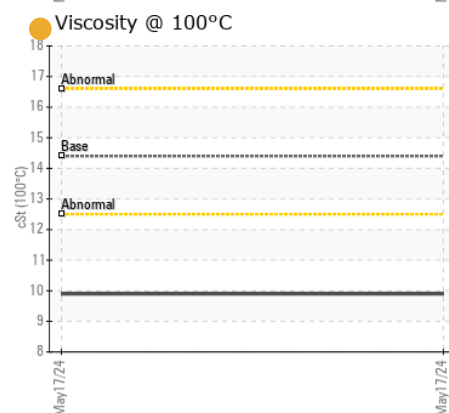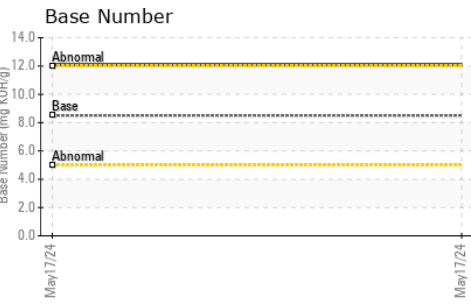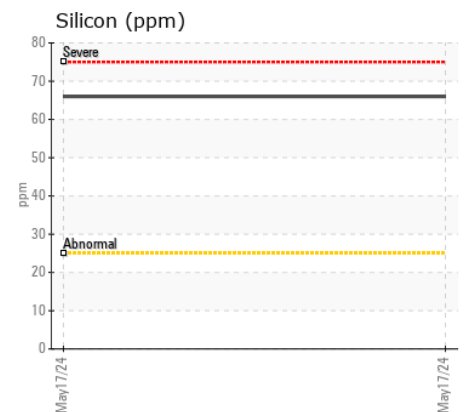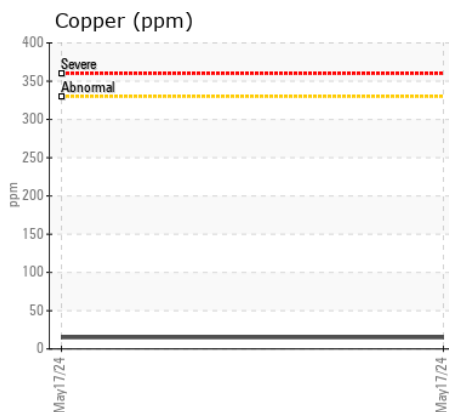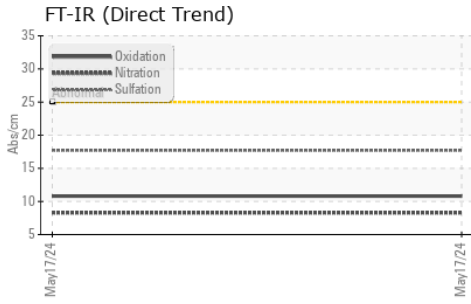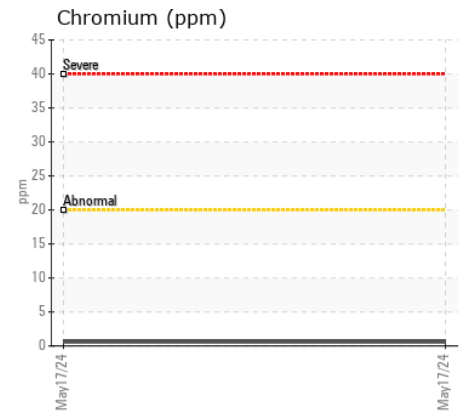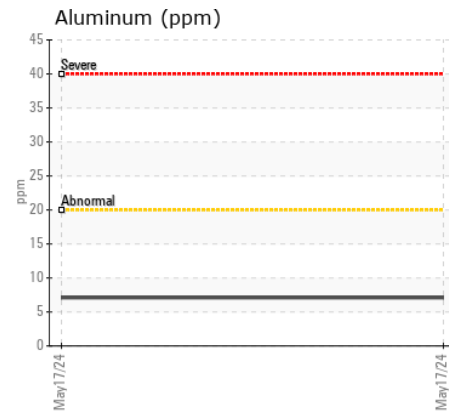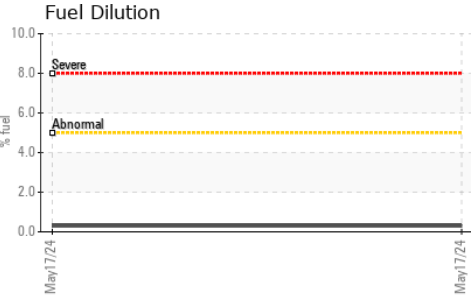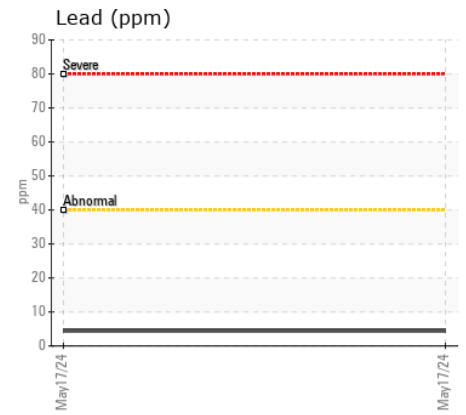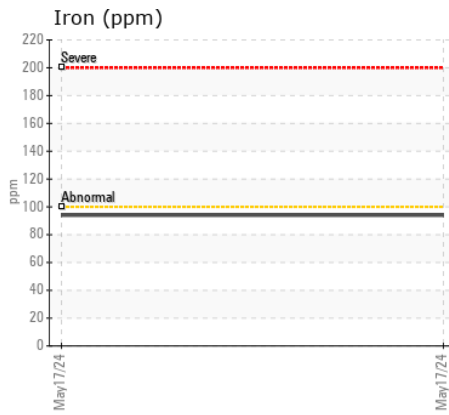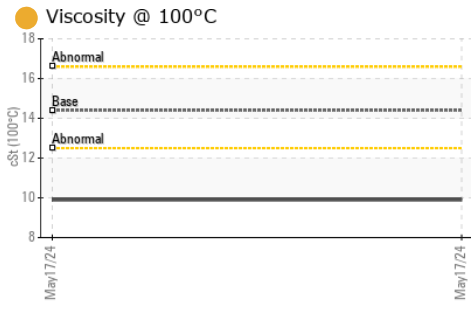

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454915 **Received** : 24 May 2024
Lab Number : 06190156 **Tested** : 30 May 2024
Unique Number : 11046908 **Diagnosed** : 30 May 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC
 9601 BOGGY CREEK RD
 ORLANDO, FL
 US 32824
 Contact: Robert LaPlante
 robert.laplante@altg.com
 T: (407)508-9736
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)