



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[716461 BRIAR]
 Machine Id
VOLVO A25G 752384
 Component
Diesel Engine
 Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454516	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		3018	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Valve wear is indicated.

Iron	ppm	ASTM D5185m	>100	9	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>2	▲ 5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	6	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>6.0	0.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	2.5	26	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.7	50	---	---
Manganese	ppm	ASTM D5185m	0.0	<1	---	---
Magnesium	ppm	ASTM D5185m	256	799	---	---
Calcium	ppm	ASTM D5185m	2057	1324	---	---
Phosphorus	ppm	ASTM D5185m	935	750	---	---
Zinc	ppm	ASTM D5185m	1223	940	---	---
Sulfur	ppm	ASTM D5185m	4079	2840	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.3	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.4	---	---


▲ Ferrous Alloys

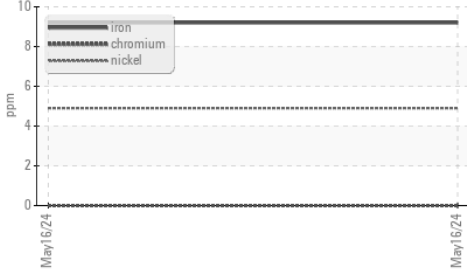


Iron (ppm)

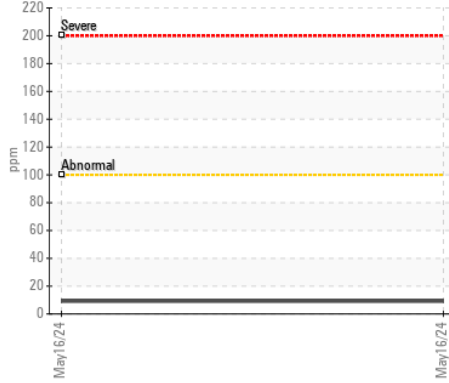


Lead (ppm)

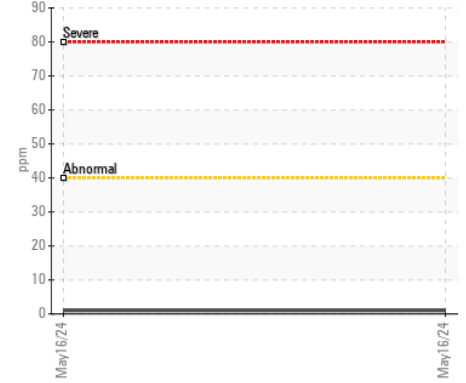


Fuel Dilution

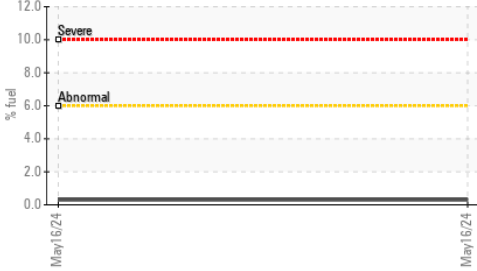


Aluminum (ppm)

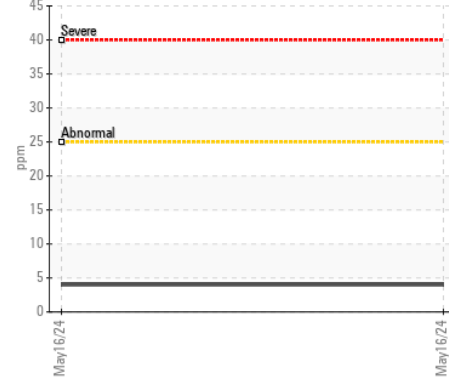


Chromium (ppm)

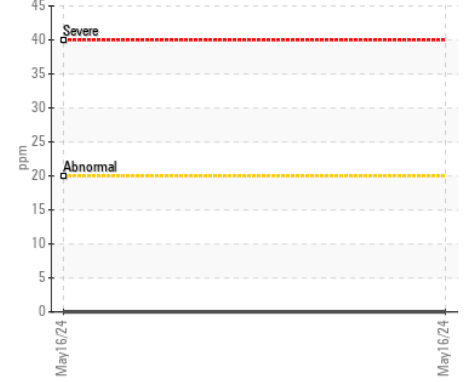


FT-IR (Direct Trend)

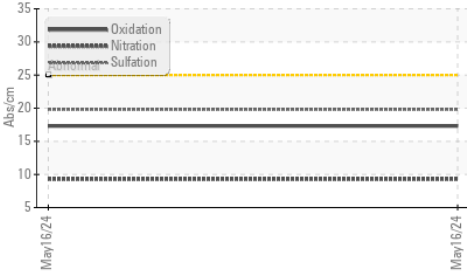


Copper (ppm)

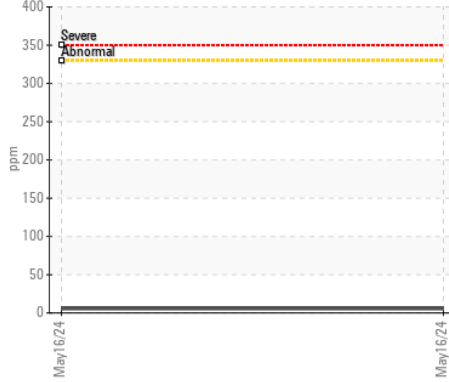


Silicon (ppm)

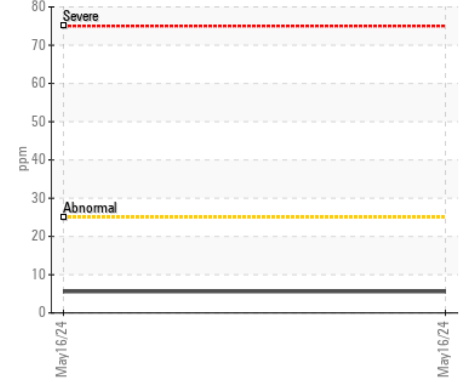


Base Number

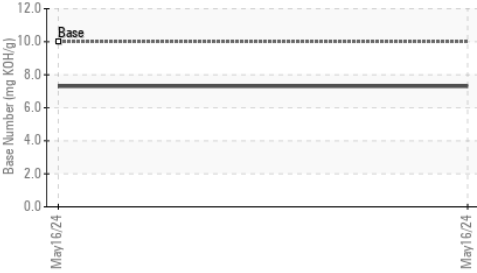


Viscosity @ 100°C

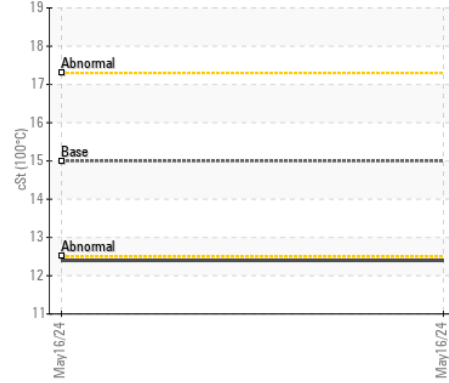

Base Number

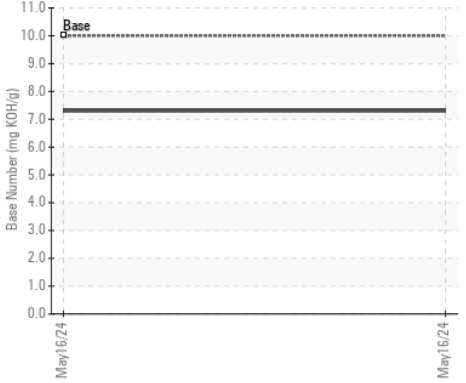

Viscosity @ 100°C

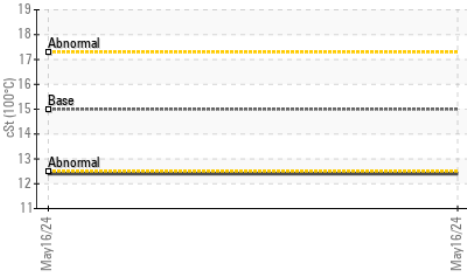

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454516 **Received** : 24 May 2024
Lab Number : 06190157 **Tested** : 30 May 2024
Unique Number : 11046909 **Diagnosed** : 30 May 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com
 T:
 F: (239)481-3302

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)