



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**{unassigned} [151252]**  
Machine Id  
**JOHN DEERE 350G 1FF350GXVKF813504**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0043522</b>	LEC0003476	---
Sample Date		Client Info		<b>22 May 2024</b>	13 Jul 2020	---
Machine Age	hrs	Client Info		<b>3002</b>	1659	---
Oil Age	hrs	Client Info		<b>7</b>	500	---
Filter Age	hrs	Client Info		<b>7</b>	500	---
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	---
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>28</b>	22	---
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	5	---
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	<b>8</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.8</b>	6.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	23.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m		<b>372</b>	313	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>126</b>	126	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>706</b>	673	---
Calcium	ppm	ASTM D5185m		<b>1480</b>	1600	---
Phosphorus	ppm	ASTM D5185m		<b>695</b>	704	---
Zinc	ppm	ASTM D5185m		<b>847</b>	801	---
Sulfur	ppm	ASTM D5185m		<b>2854</b>	3368	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>9.4</b>	9.2	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.3	---

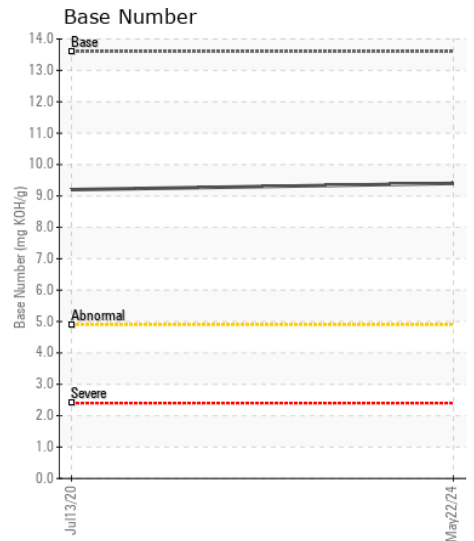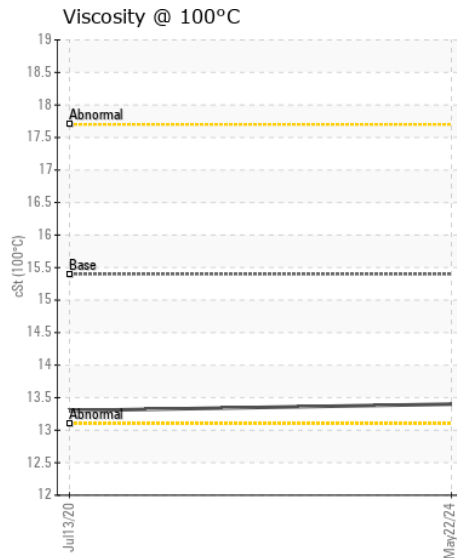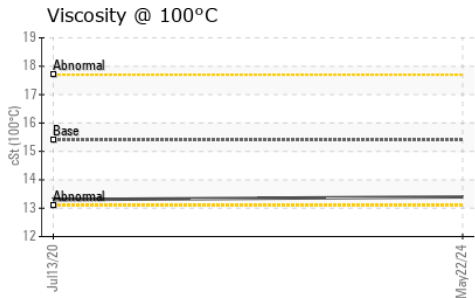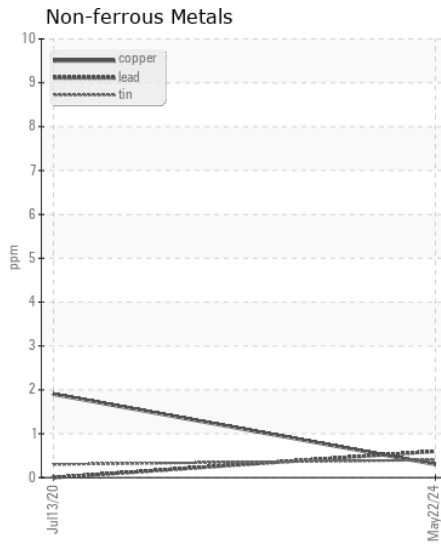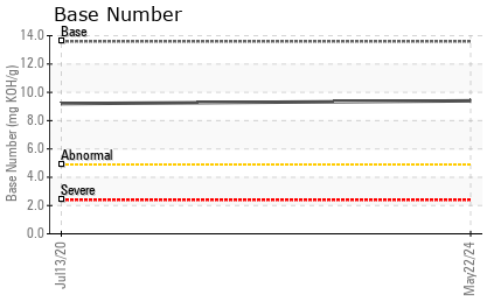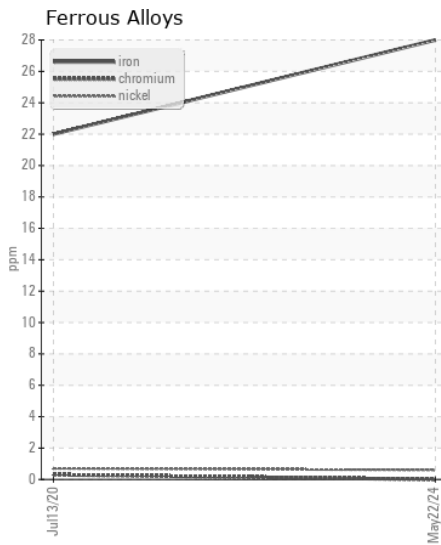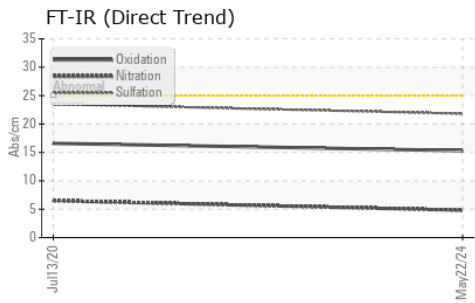

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0043522 **Received** : 24 May 2024  
**Lab Number** : 06190164 **Tested** : 28 May 2024  
**Unique Number** : 11046916 **Diagnosed** : 28 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MICHELS CORPORATION**  
 814 W MAIN ST  
 BROWNSVILLE, WI  
 US 53006  
 Contact: DENNIS ESTIS  
 destis@michels.us  
 T: (724)249-2065  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)