



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
8464335
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0018148	RPL0017450	RPL0011335
Sample Date		Client Info		24 Apr 2024	26 Jan 2024	27 Oct 2023
Machine Age	mls	Client Info		0	132099	126328
Oil Age	mls	Client Info		4527	5771	27281
Filter Age	mls	Client Info		0	5771	27281
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				MARGINAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	34	▲ 156
Chromium	ppm	ASTM D5185m	>20	0	1	4
Nickel	ppm	ASTM D5185m	>4	0	1	1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	14	8	31
Lead	ppm	ASTM D5185m	>40	1	<1	0
Copper	ppm	ASTM D5185m	>330	<1	5	15
Tin	ppm	ASTM D5185m	>15	<1	1	1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	5	10	▲ 27
Potassium	ppm	ASTM D5185m	>20	26	14	53
Fuel	%	ASTM D3524	>5	▲ 2.4	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	1.5
Nitration	Abs/cm	*ASTM D7624	>20	7.0	11.3	17.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	22.1	36.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	7
Boron	ppm	ASTM D5185m	0	55	98	17
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	45	92	37
Manganese	ppm	ASTM D5185m		<1	2	4
Magnesium	ppm	ASTM D5185m	0	528	646	679
Calcium	ppm	ASTM D5185m		1613	1355	1585
Phosphorus	ppm	ASTM D5185m		730	748	828
Zinc	ppm	ASTM D5185m		915	902	1081
Sulfur	ppm	ASTM D5185m		2906	2719	2665
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.2	22.3	45.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.4	7.0	▲ 2.9
Visc @ 100°C	cSt	ASTM D445	14	12.4	12.8	14.3

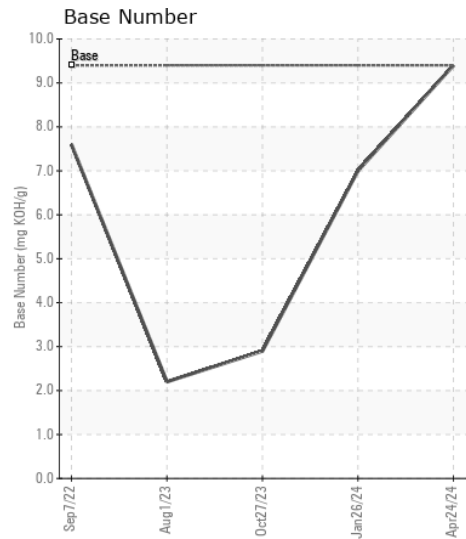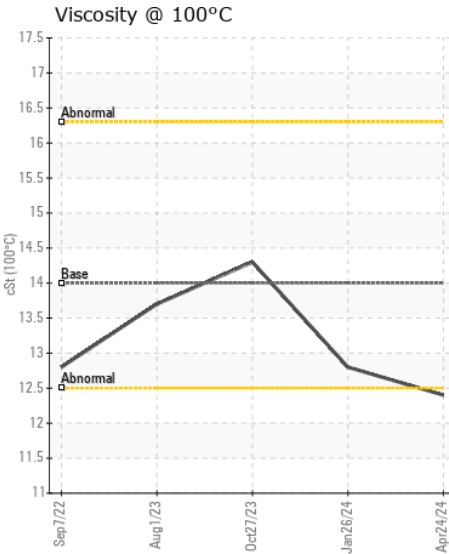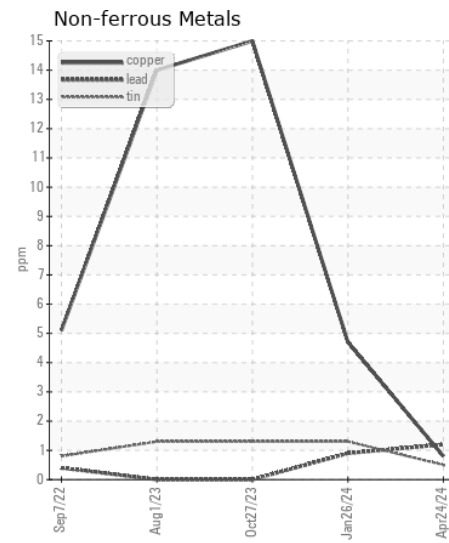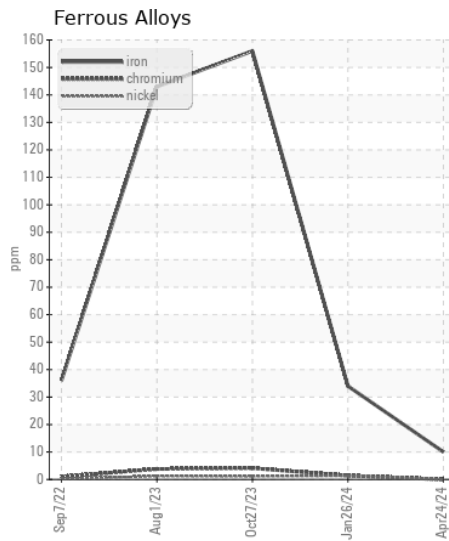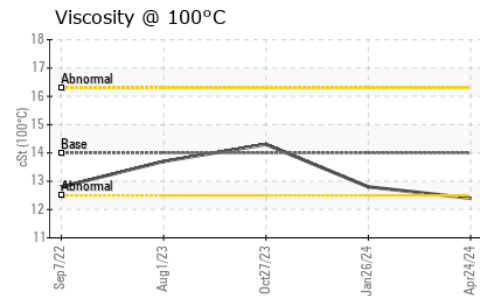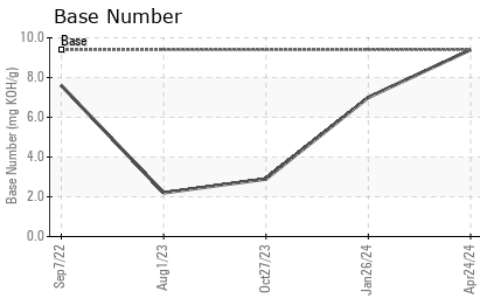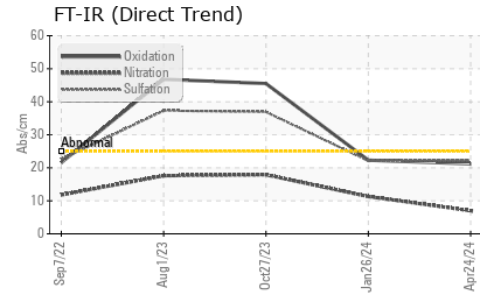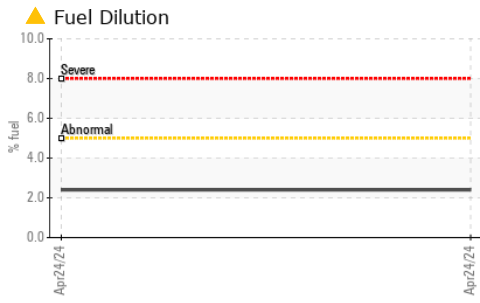

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0018148 **Received** : 24 May 2024
Lab Number : 06190216 **Tested** : 30 May 2024
Unique Number : 11046968 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

RTL PACLEASE - 7007 - Fontana
 3121 South Riverside
 Bloomington, CA
 US 92316
 Contact: Rudy Trevizo
 TrevizoR@RushEnterprises.Com
 T: (909)829-1044
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)