



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**8465086**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0020456</b>	RPL0020594	---
Sample Date		Client Info		<b>14 May 2024</b>	14 May 2024	---
Machine Age	mls	Client Info		<b>96113</b>	15000	---
Oil Age	mls	Client Info		<b>10252</b>	15000	---
Filter Age	mls	Client Info		<b>10252</b>	15000	---
Oil Changed		Client Info		<b>Not Changd</b>	Changed	---
Filter Changed		Client Info		<b>Not Changd</b>	Changed	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	43	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	12	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	9	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	15	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	21	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	3	---
Boron	ppm	ASTM D5185m	0	<b>50</b>	58	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>57</b>	109	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	0	<b>553</b>	679	---
Calcium	ppm	ASTM D5185m		<b>1685</b>	1333	---
Phosphorus	ppm	ASTM D5185m		<b>710</b>	702	---
Zinc	ppm	ASTM D5185m		<b>966</b>	872	---
Sulfur	ppm	ASTM D5185m		<b>2763</b>	3225	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.0</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14	<b>13.1</b>	11.5	---

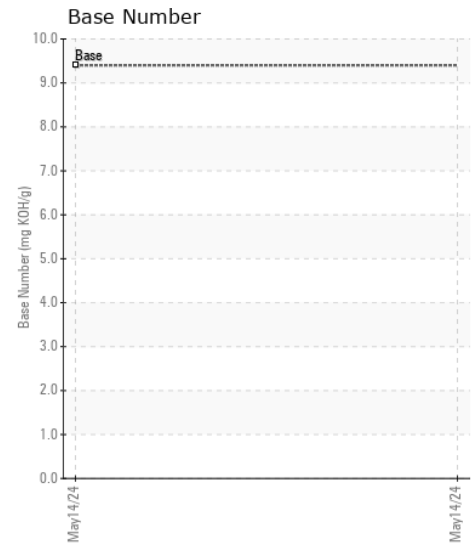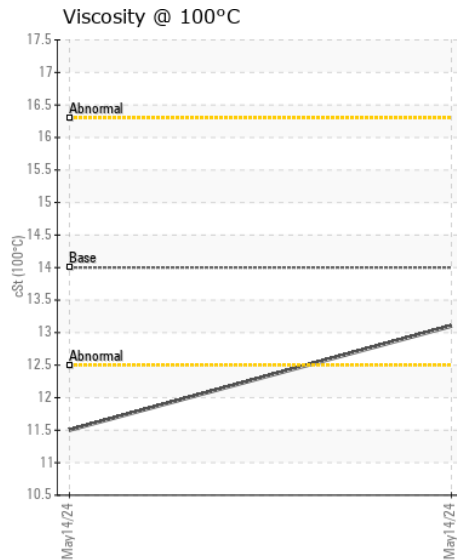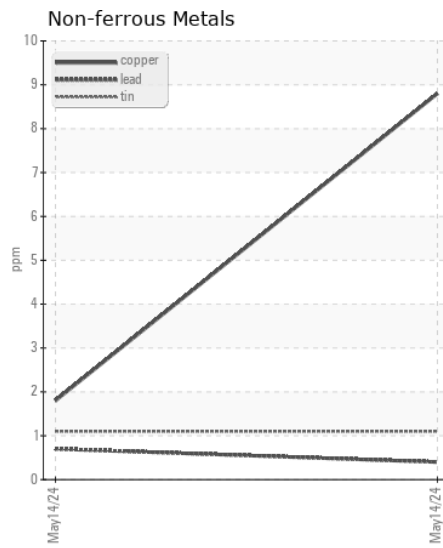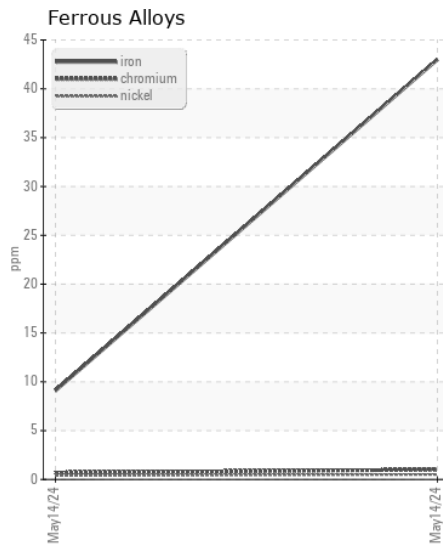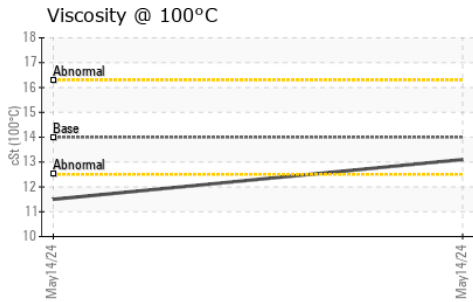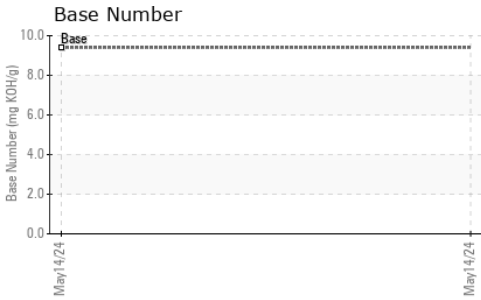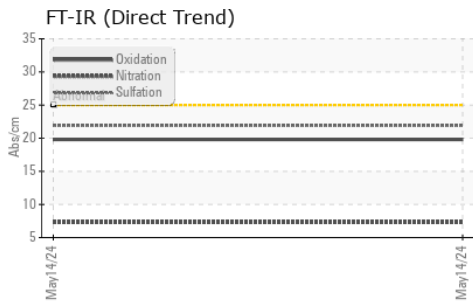

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0020456  
**Lab Number** : 06190297  
**Unique Number** : 11047049  
**Test Package** : FLEET

**Received** : 24 May 2024  
**Tested** : 27 May 2024  
**Diagnosed** : 27 May 2024 - Wes Davis

**RTL PACLEASE - 7007 - Fontana**  
 3121 South Riverside  
 Bloomington, CA  
 US 92316

Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: