



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W/O 10824]
Machine Id
VOLVO L110H 632309
Component
Diesel Engine
Fluid
{not provided} (5 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001269	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		538	---	---
Oil Age	hrs	Client Info		538	---	---
Filter Age	hrs	Client Info		538	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The aluminum level is abnormal. All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	33	---	---
Chromium	ppm	ASTM D5185m	>10	6	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	2	---	---
Aluminum	ppm	ASTM D5185m	>10	▲ 117	---	---
Lead	ppm	ASTM D5185m	>20	3	---	---
Copper	ppm	ASTM D5185m	>15	14	---	---
Tin	ppm	ASTM D5185m	>10	4	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	17	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Fuel	%	ASTM D3524	>6.0	0.4	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		59	---	---
Barium	ppm	ASTM D5185m		22	---	---
Molybdenum	ppm	ASTM D5185m		46	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		713	---	---
Calcium	ppm	ASTM D5185m		1560	---	---
Phosphorus	ppm	ASTM D5185m		979	---	---
Zinc	ppm	ASTM D5185m		1237	---	---
Sulfur	ppm	ASTM D5185m		3908	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.5	---	---
Visc @ 100°C	cSt	ASTM D445		12.2	---	---

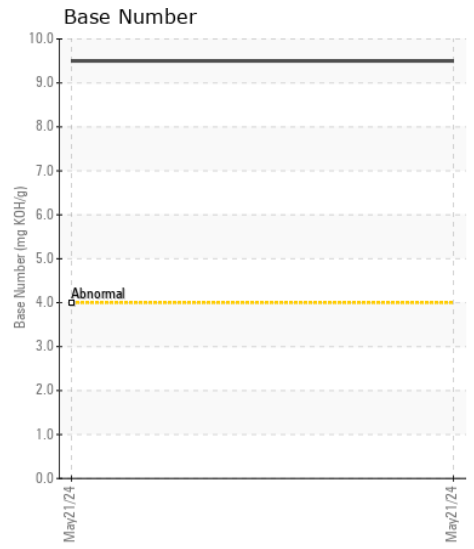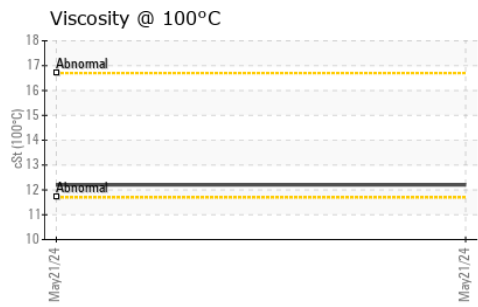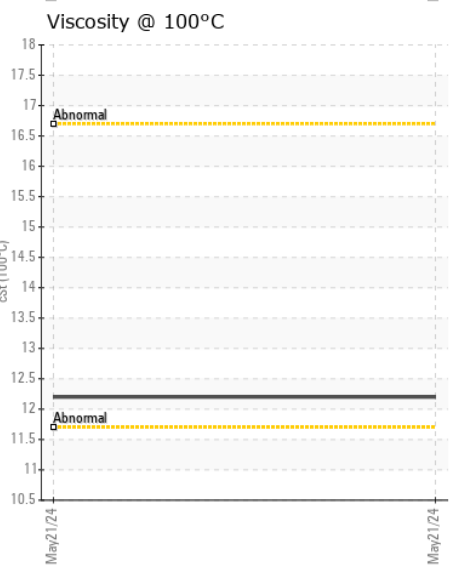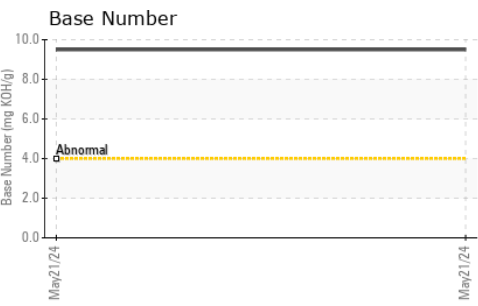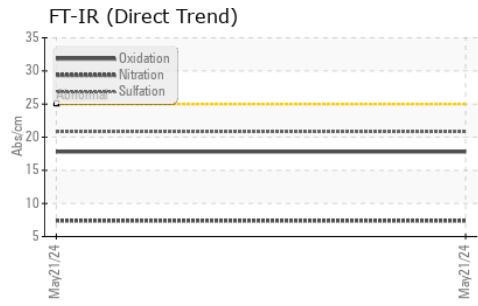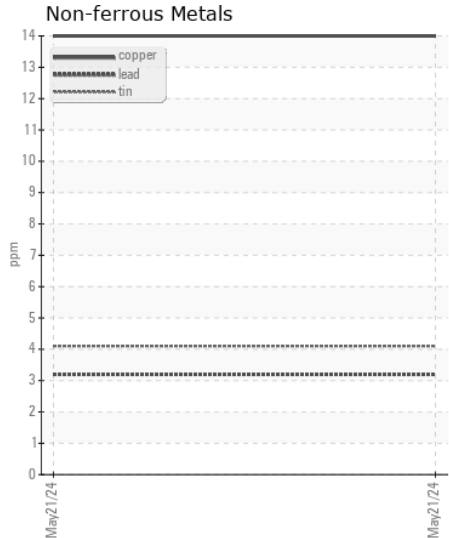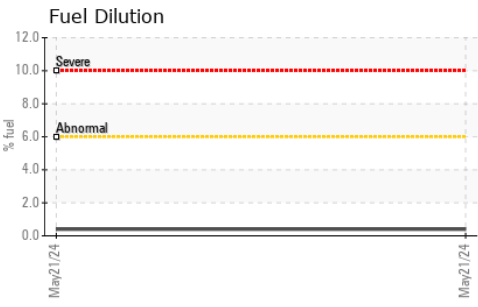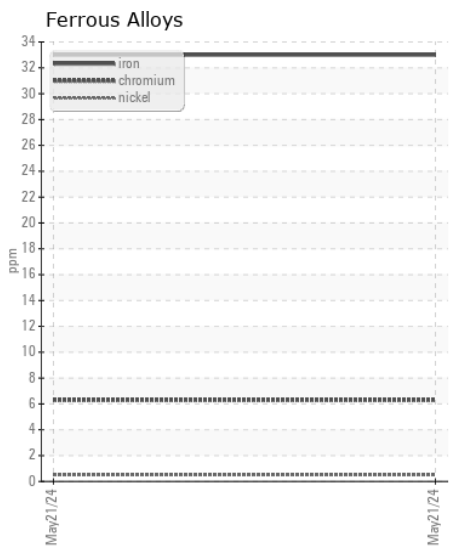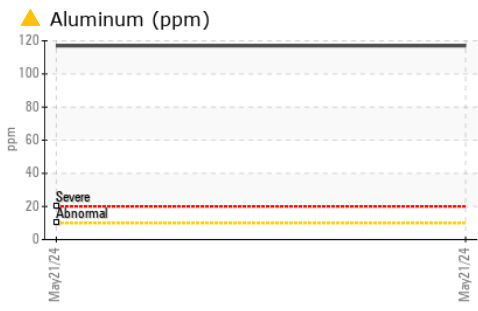

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001269 **Received** : 24 May 2024
Lab Number : 06190356 **Tested** : 30 May 2024
Unique Number : 11047108 **Diagnosed** : 30 May 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FUELDILUTION, PercentFuel, TBN)

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227
 Contact: MARK CIULLA
 mciulla@mcclung-logan.com
 T: (410)242-6500
 F: (410)242-7835

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)