



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W02008336]
Machine Id
VOLVO A30F 82256
Component
Hydraulic System
Fluid
{not provided} (50 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W02008336)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002467	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		14598	---	---
Oil Age	hrs	Client Info		2000	---	---
Filter Age	hrs	Client Info		2000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	4	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	1	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>150	<1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	16	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647		9699	---	---
Particles >6µm		ASTM D7647	>5000	1658	---	---
Particles >14µm		ASTM D7647	>160	62	---	---
Particles >21µm		ASTM D7647	>40	11	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>-/19/14	20/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		109	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		6	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		50	---	---
Calcium	ppm	ASTM D5185m		3212	---	---
Phosphorus	ppm	ASTM D5185m		1064	---	---
Zinc	ppm	ASTM D5185m		1373	---	---
Sulfur	ppm	ASTM D5185m		8797	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.84	---	---
Visc @ 40°C	cSt	ASTM D445		50.5	---	---

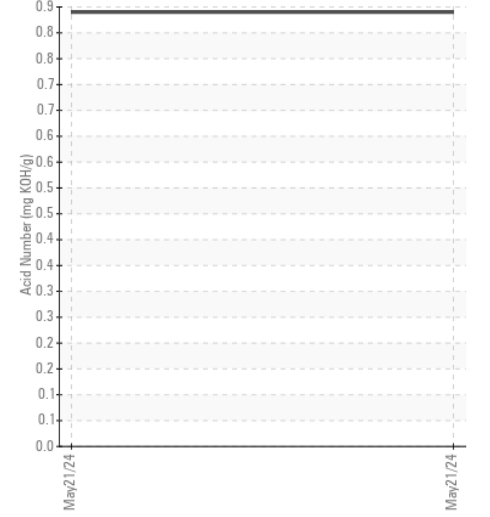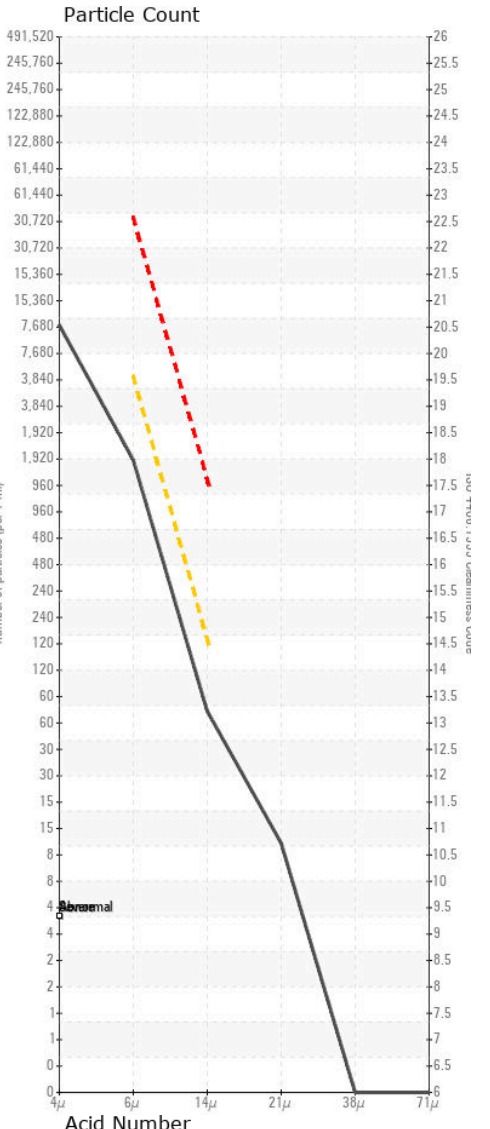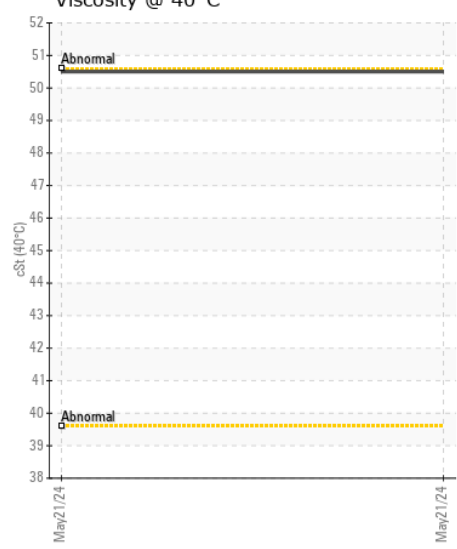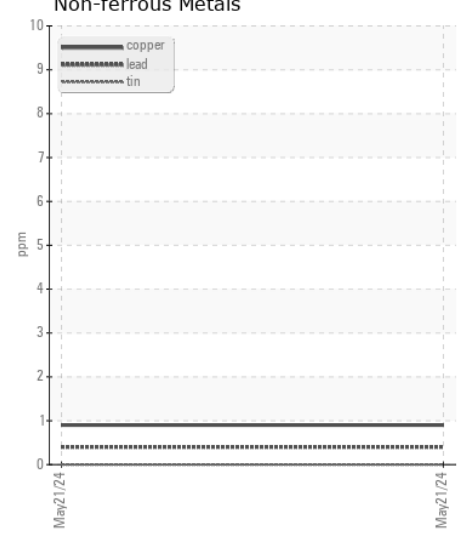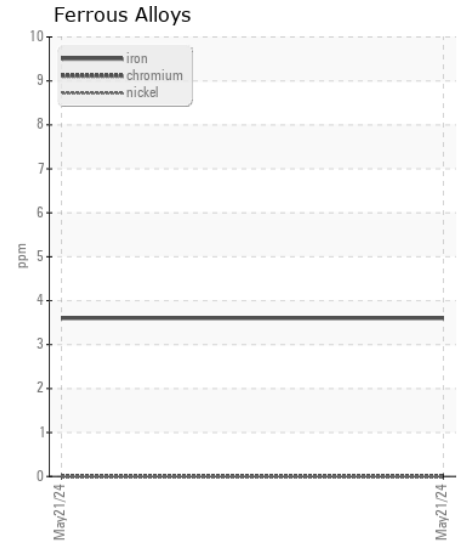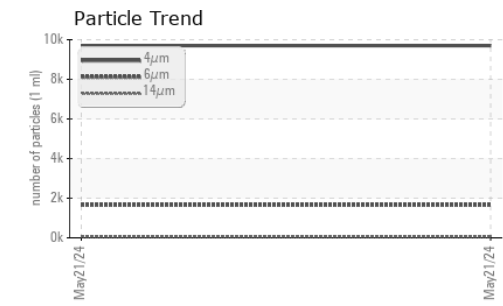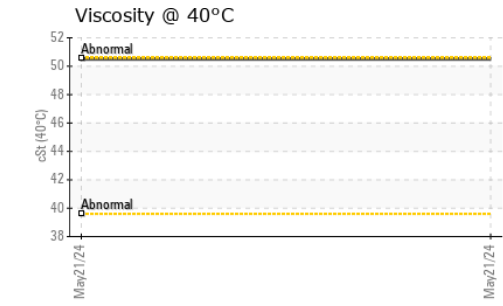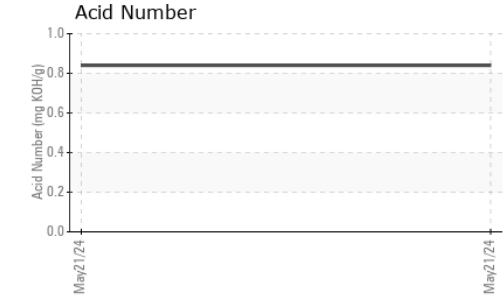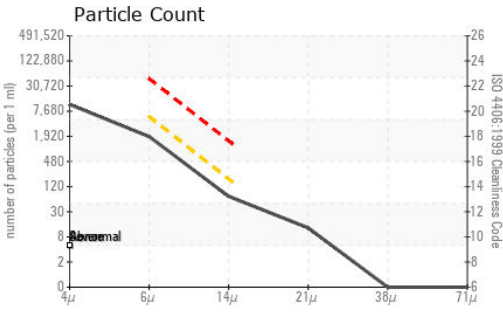

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002467
Lab Number : 06190394
Unique Number : 11047146
Test Package : CONST
Received : 24 May 2024
Tested : 29 May 2024
Diagnosed : 29 May 2024 - Angela Borella

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)