



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
{unassigned} [151252]
Machine Id
JOHN DEERE 350G 1FF350GXVKF813504
Component
Swing Drive
Fluid
JOHN DEERE GL-5 80W90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0043524	LEC0003502	---
Sample Date		Client Info		22 May 2024	13 Jul 2020	---
Machine Age	hrs	Client Info		3002	1659	---
Oil Age	hrs	Client Info		0	1659	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		46	44	---
Iron	ppm	ASTM D5185m	>151	54	56	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	<1	<1	---
Lead	ppm	ASTM D5185m	>51	<1	0	---
Copper	ppm	ASTM D5185m	>51	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	10	17	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	<1	---
Boron	ppm	ASTM D5185m		185	84	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		2	0	---
Calcium	ppm	ASTM D5185m		137	12	---
Phosphorus	ppm	ASTM D5185m		968	535	---
Zinc	ppm	ASTM D5185m		45	6	---
Sulfur	ppm	ASTM D5185m		26713	21236	---
Visc @ 40°C	cSt	ASTM D445		289	185	---

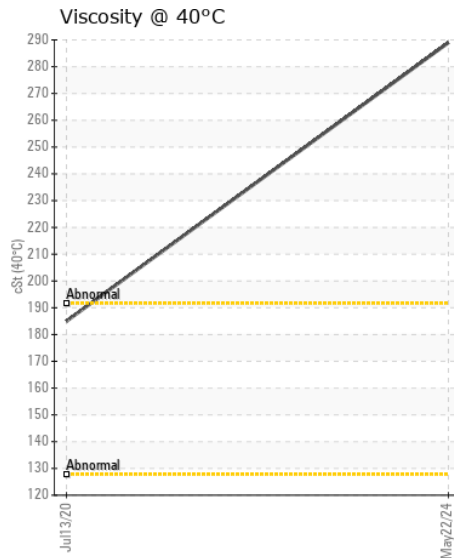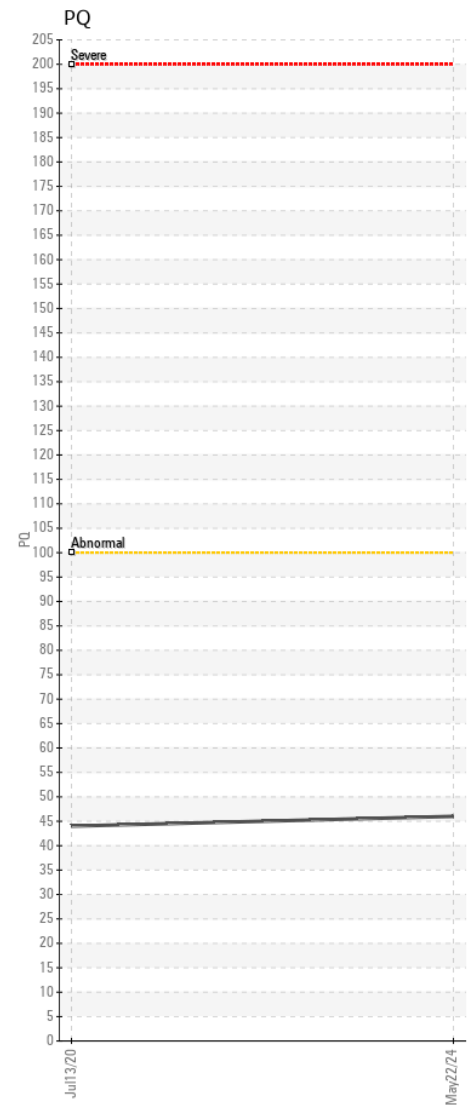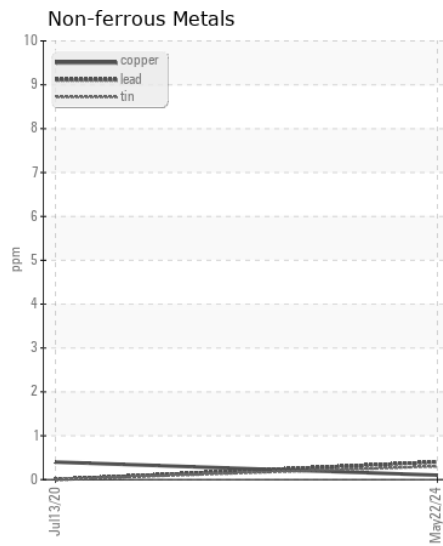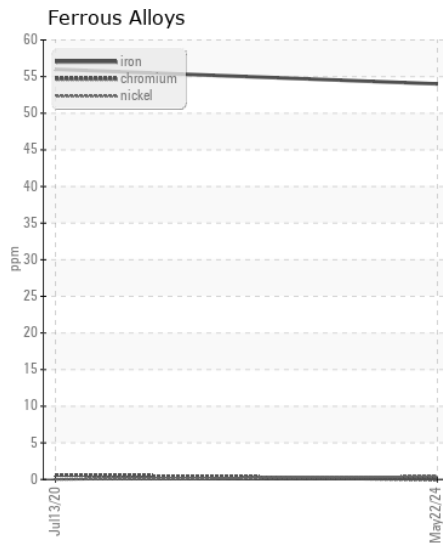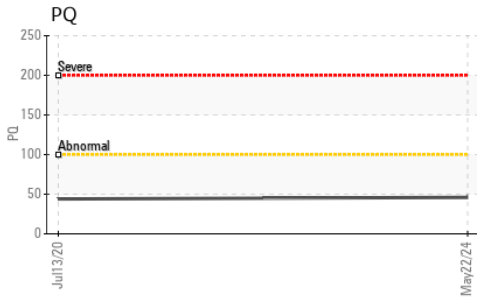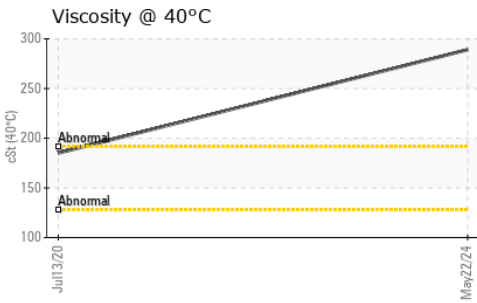

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0043524 **Received** : 24 May 2024
Lab Number : 06190767 **Tested** : 29 May 2024
Unique Number : 11047519 **Diagnosed** : 29 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

MICHELS CORPORATION
 814 W MAIN ST
 BROWNSVILLE, WI
 US 53006
 Contact: DENNIS ESTIS
 destis@michels.us
 T: (724)249-2065
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)