



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[701295 PRIMORIS]
Machine Id
VOLVO A40G 352509
Component
Bogie/Center Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452268	VCP440796	VCP406819
Sample Date		Client Info		12 Apr 2024	16 Nov 2023	25 Apr 2023
Machine Age	hrs	Client Info		6123	5500	4282
Oil Age	hrs	Client Info		2000	1500	3282
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	76	74	416
Chromium	ppm	ASTM D5185m	>20	<1	<1	5
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	2	0
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>150	<1	1	3
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	2	3
Potassium	ppm	ASTM D5185m	>20	<1	1	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	0
Boron	ppm	ASTM D5185m	111	196	197	152
Barium	ppm	ASTM D5185m	0.0	0	3	0
Molybdenum	ppm	ASTM D5185m	0.9	12	11	5
Manganese	ppm	ASTM D5185m	0.0	3	2	13
Magnesium	ppm	ASTM D5185m	39	45	42	1
Calcium	ppm	ASTM D5185m	93	138	168	17
Phosphorus	ppm	ASTM D5185m	920	1054	1119	2383
Zinc	ppm	ASTM D5185m	104	98	75	15
Sulfur	ppm	ASTM D5185m	20179	33031	31187	31041
Visc @ 40°C	cSt	ASTM D445	333	248	251	51.8

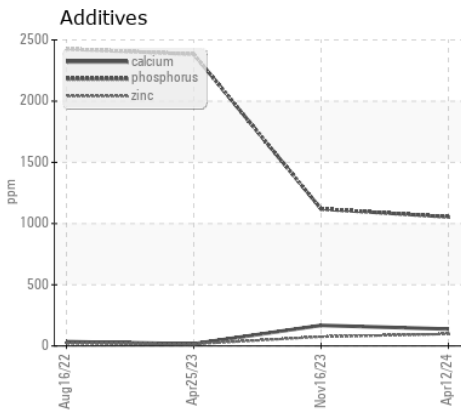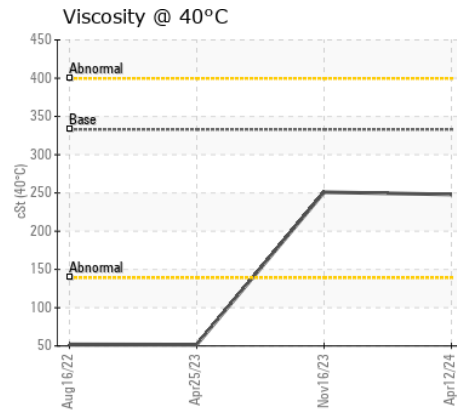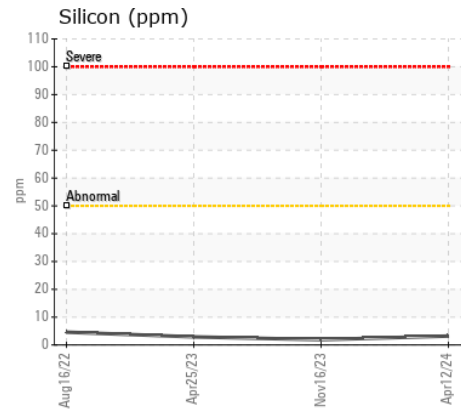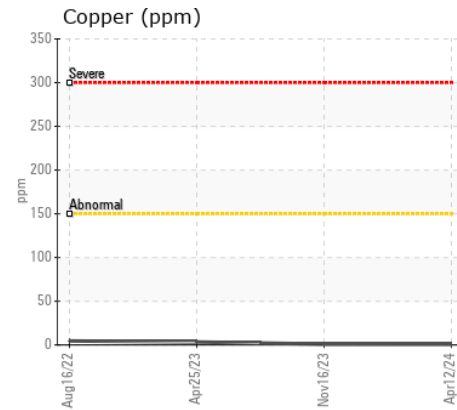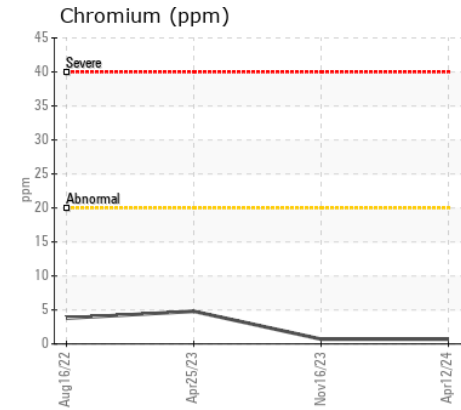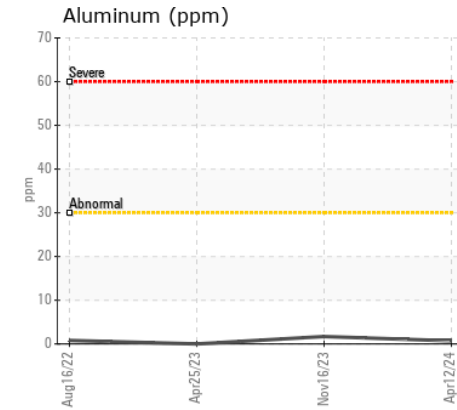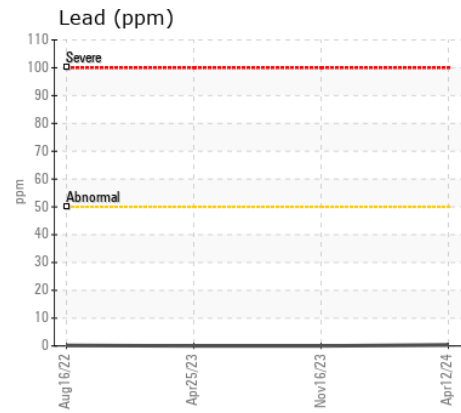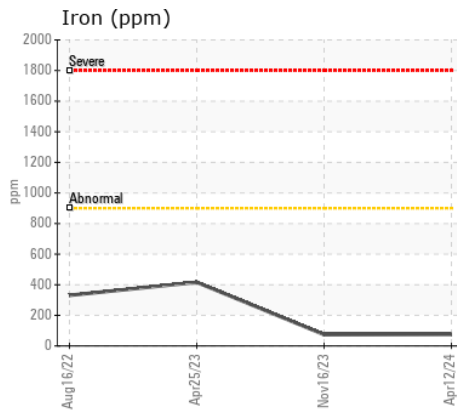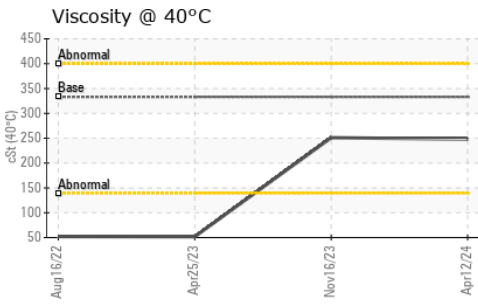

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452268
Lab Number : 06190770
Unique Number : 11047522
Test Package : MOB 1

Received : 24 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619

Contact: KENNY HANEY
 khaney@flaglerce.com

T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)