



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[701286 PRIMORIS]
Machine Id
VOLVO A40G 352491
Component
Brake Cooling System
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452262	VCP426338	VCP393787
Sample Date		Client Info		18 Apr 2024	22 Sep 2023	25 Apr 2023
Machine Age	hrs	Client Info		5157	4299	3617
Oil Age	hrs	Client Info		1000	4299	3617
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	17	24	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	1	8	7
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	2	0
Lead	ppm	ASTM D5185m	>50	<1	<1	<1
Copper	ppm	ASTM D5185m	>200	78	▲ 319	▲ 307
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	14	20	18
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	7	7
Boron	ppm	ASTM D5185m		135	113	109
Barium	ppm	ASTM D5185m		0	9	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		1	1	2
Magnesium	ppm	ASTM D5185m		25	7	7
Calcium	ppm	ASTM D5185m		3927	3189	3386
Phosphorus	ppm	ASTM D5185m		1267	1415	1302
Zinc	ppm	ASTM D5185m		1638	1420	1426
Sulfur	ppm	ASTM D5185m		5189	6514	5044
Visc @ 40°C	cSt	ASTM D445	55	42.8	44.2	39.4

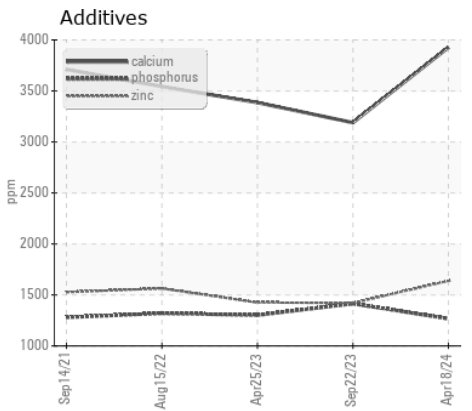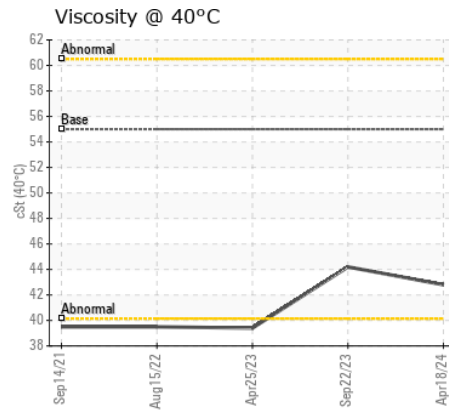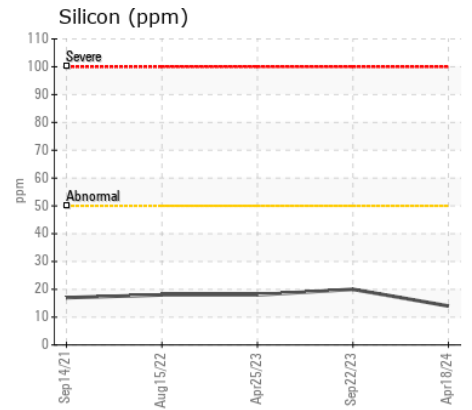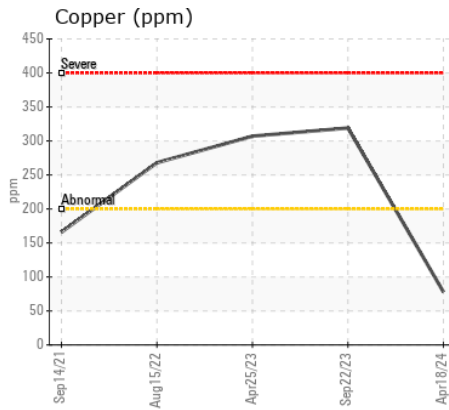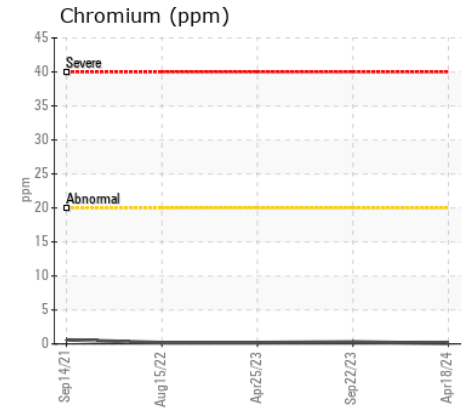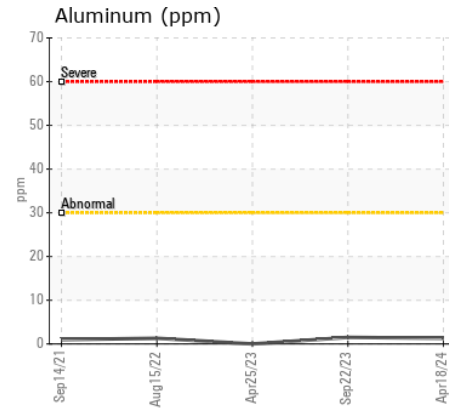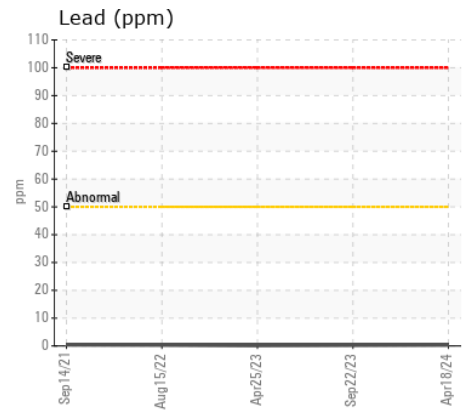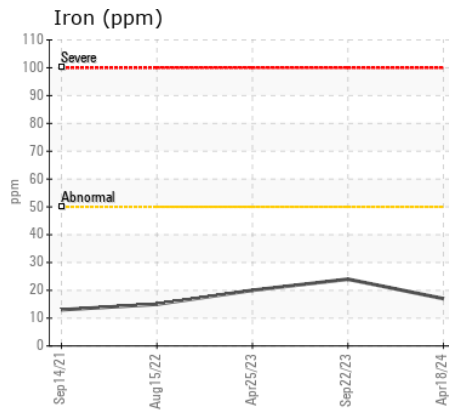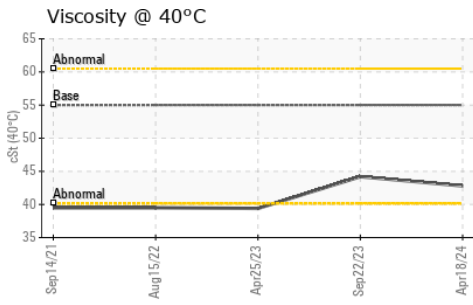

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452262
Lab Number : 06190783
Unique Number : 11047535
Test Package : MOB 1
Received : 24 May 2024
Tested : 29 May 2024
Diagnosed : 29 May 2024 - Sean Felton

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: JOHN FARDELLA
 john.fardella@altg.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)