



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
AMR-12th Street [FORT SCOTT]
Machine Id
23636 LIEBHERR R924 025202-1066
Component
Splitter Box
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0017228	DJJ0017271	DJJ0013852
Sample Date		Client Info		20 May 2024	06 Nov 2023	15 Jun 2022
Machine Age	hrs	Client Info		12691	12142	10938
Oil Age	hrs	Client Info		0	250	250
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	74	69	4
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	2
Aluminum	ppm	ASTM D5185m	>20	3	1	<1
Lead	ppm	ASTM D5185m	>30	0	0	<1
Copper	ppm	ASTM D5185m	>20	<1	<1	11
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	23	8	2
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	1	<1	2
Boron	ppm	ASTM D5185m	0	0	1	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	0	0
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	<1	2	0	<1
Calcium	ppm	ASTM D5185m	<1	28	65	3
Phosphorus	ppm	ASTM D5185m	2143	2412	2196	2254
Zinc	ppm	ASTM D5185m	<1	8	0	8
Sulfur	ppm	ASTM D5185m	23468	31647	34102	25056
Visc @ 40°C	cSt	ASTM D445	170	192	173	191

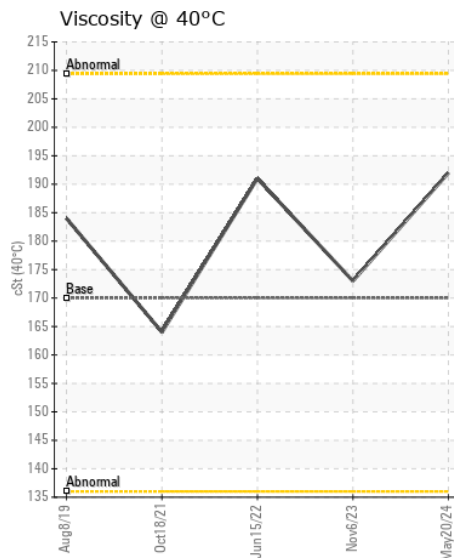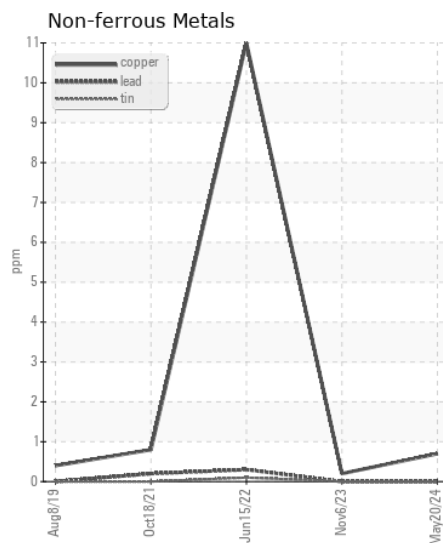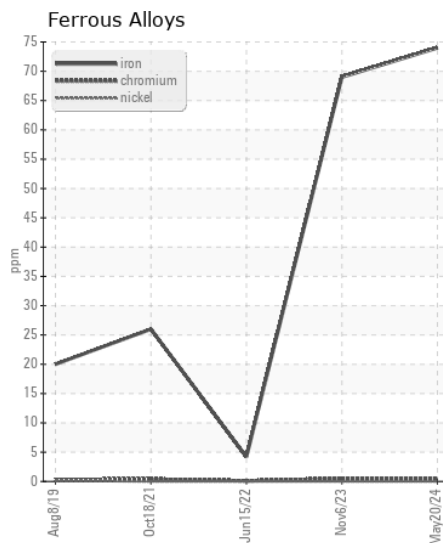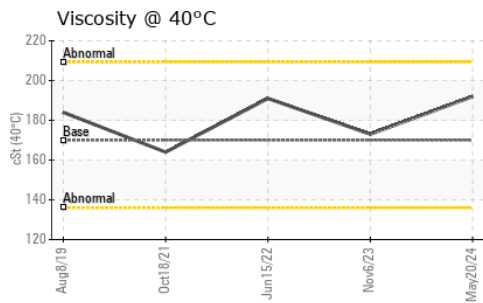

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0017228
Lab Number : 06190828
Unique Number : 11047580
Test Package : CONST

Received : 24 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Wes Davis

ADVANTAGE METALS RECYCLING - 12 STREET
 1153 S. 12TH STREET
 KANSAS CITY, KS
 US 66105
 Contact: JOHN PEEK
 john.peek@advantagerecycling.com
 T: (660)424-9134
 F: (913)621-2766

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)