



# VOLVO

## OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**SEVERE**  
**NORMAL**



Area

**[716461 BRIAR]**

Machine Id

**VOLVO A40G 352384**

Component

**Transmission (Auto)**

Fluid

**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

### WEAR

All component wear rates are normal.












### CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a moderate amount of visible silt present in the sample.

### FLUID CONDITION

The fluid is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP454521</b>	VCP424418	---
Sample Date		Client Info		<b>16 May 2024</b>	25 Sep 2023	---
Machine Age	hrs	Client Info		<b>3018</b>	1110	---
Oil Age	hrs	Client Info		<b>0</b>	1110	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Filter Changed		Client Info		<b>Changed</b>	Not Changed	---
Sample Status				<b>SEVERE</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>160	<b>91</b>	27	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>28</b>	11	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>225	<b>11</b>	18	---
Tin	ppm	ASTM D5185m	>10	<b>3</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>20	<b>▲ 72</b>	19	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>▲ MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>4</b>	1	---
Boron	ppm	ASTM D5185m	187	<b>92</b>	88	---
Barium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>2</b>	<1	---
Manganese	ppm	ASTM D5185m	0.0	<b>2</b>	4	---
Magnesium	ppm	ASTM D5185m	6.8	<b>4</b>	2	---
Calcium	ppm	ASTM D5185m	215	<b>76</b>	80	---
Phosphorus	ppm	ASTM D5185m	445	<b>228</b>	203	---
Zinc	ppm	ASTM D5185m	56	<b>4</b>	0	---
Sulfur	ppm	ASTM D5185m	1336	<b>3386</b>	2246	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>29.8</b>	32.5	---

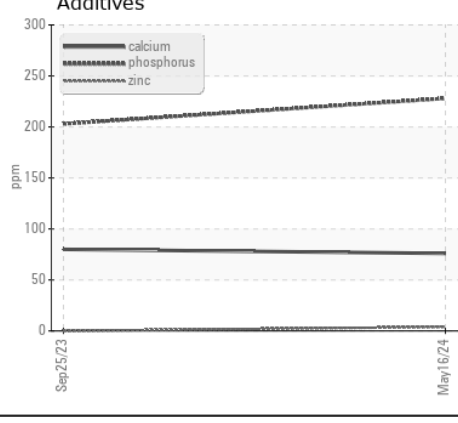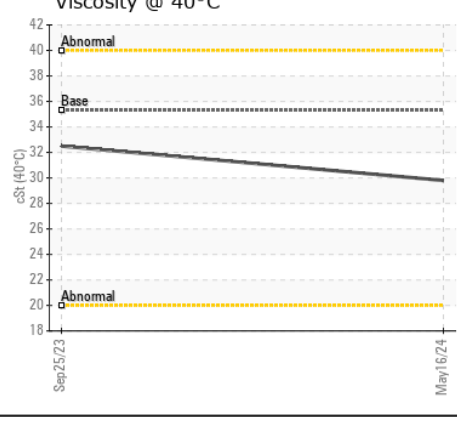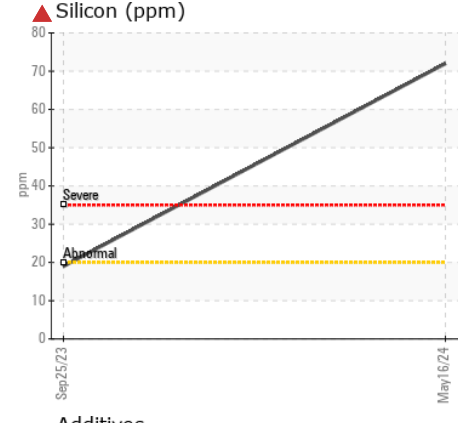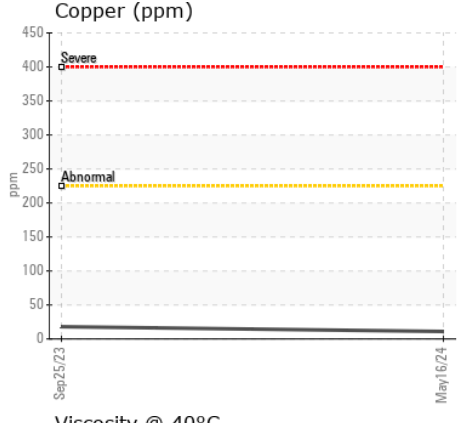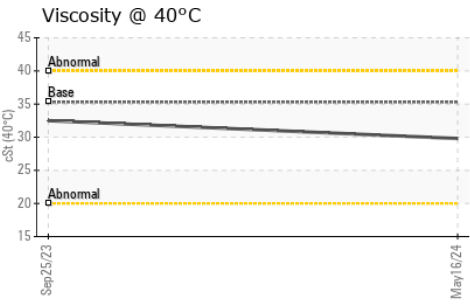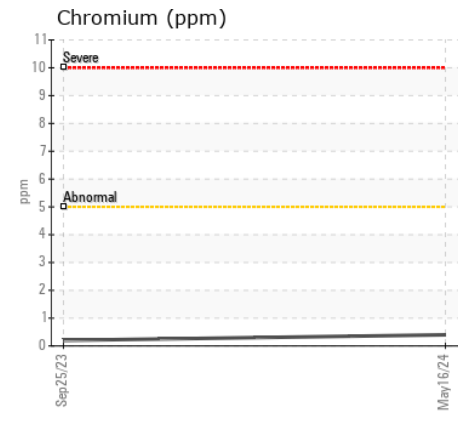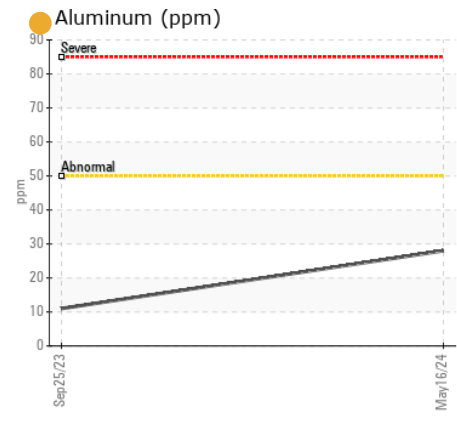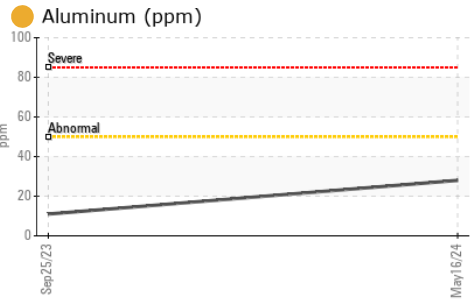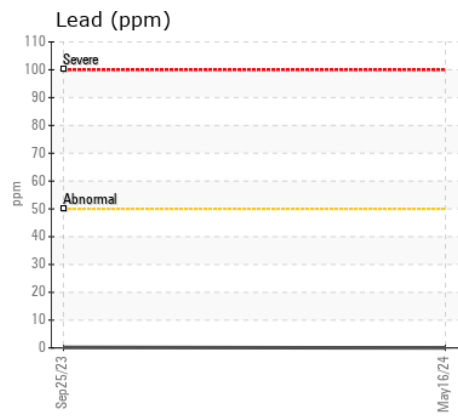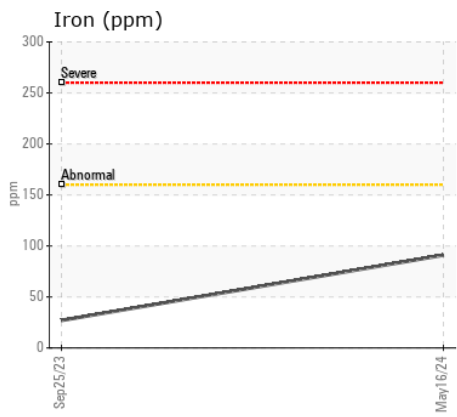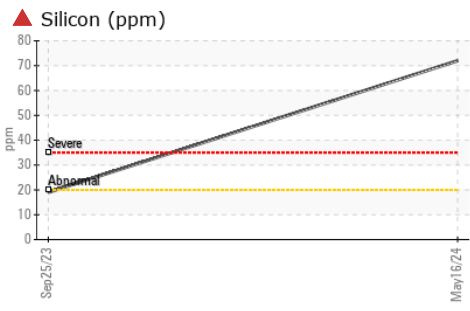

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP454521 **Received** : 24 May 2024  
**Lab Number** : 06190843 **Tested** : 29 May 2024  
**Unique Number** : 11047595 **Diagnosed** : 29 May 2024 - Sean Felton  
**Test Package** : MOB 1

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)