



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Shredder**  
Machine Id  
Component  
**In-Feed Conveyor- Shredder**  
Component  
**Hydraulic Power Pack**  
Fluid  
**SHELL HYDRAULIC S1 M 68 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PE0002220</b>	PE0003609	PE0003607
Sample Date		Client Info		<b>20 May 2024</b>	18 Apr 2024	21 Mar 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	1	<1
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	3	0
Lead	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>3</b>	4	3
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0
Water		WC Method	>0.05	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>331</b>	250	398
Particles >6µm		ASTM D7647	>1300	<b>37</b>	35	116
Particles >14µm		ASTM D7647	>160	<b>4</b>	3	10
Particles >21µm		ASTM D7647	>40	<b>2</b>	0	3
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/12/9</b>	15/12/9	16/14/10
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>11</b>	10	6
Calcium	ppm	ASTM D5185m		<b>50</b>	46	55
Phosphorus	ppm	ASTM D5185m		<b>280</b>	273	274
Zinc	ppm	ASTM D5185m		<b>291</b>	283	281
Sulfur	ppm	ASTM D5185m		<b>760</b>	624	767
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.18</b>	0.26	0.31
Visc @ 40°C	cSt	ASTM D445	68	<b>63.3</b>	64.4	63.6

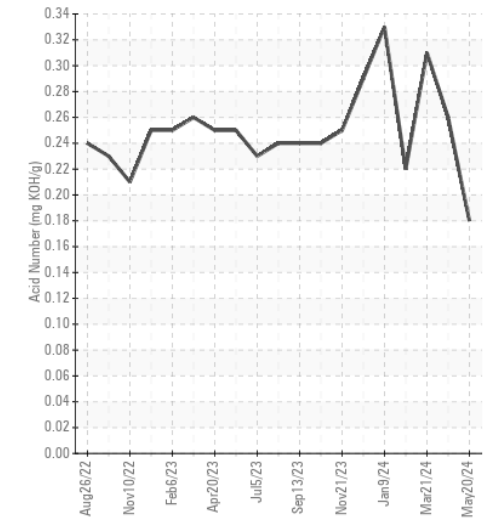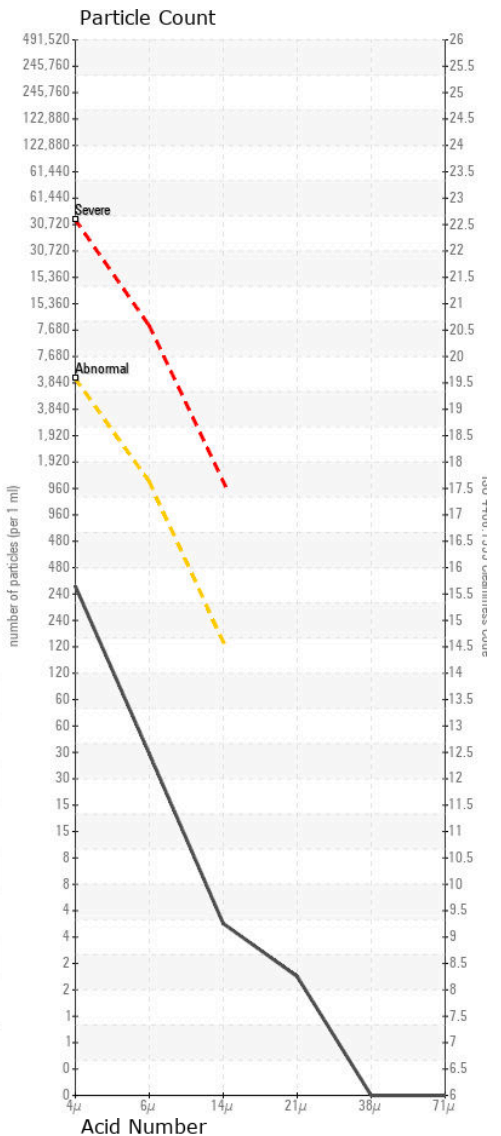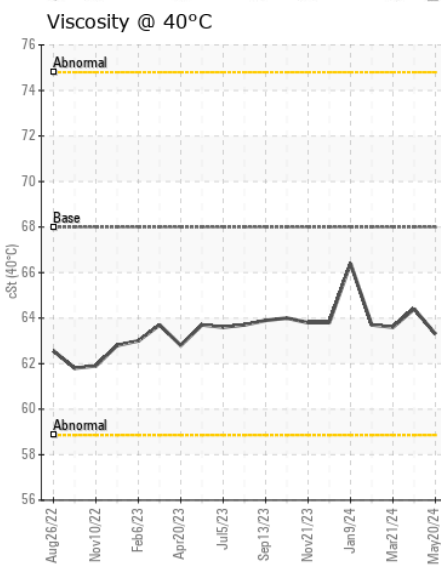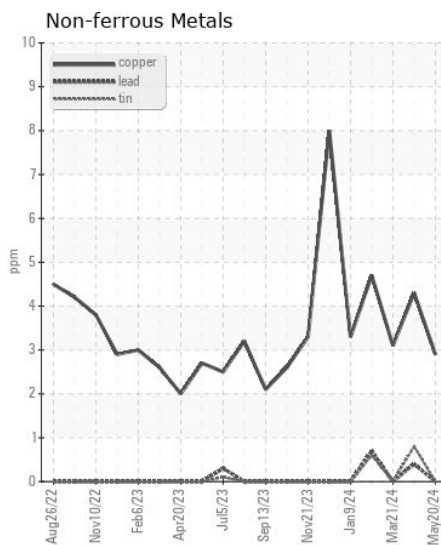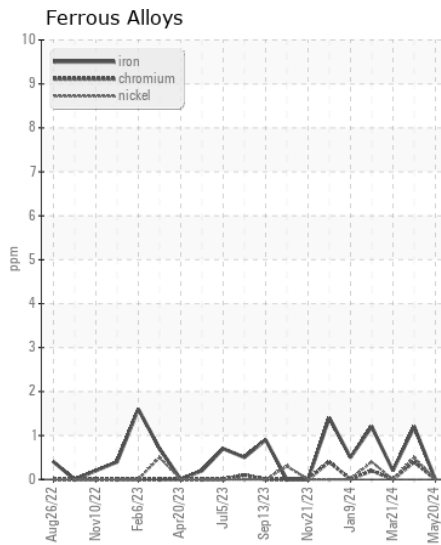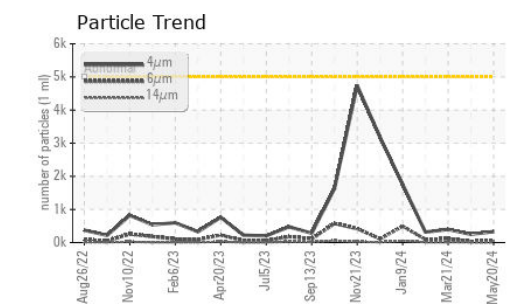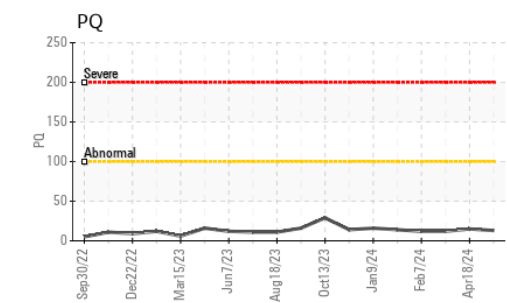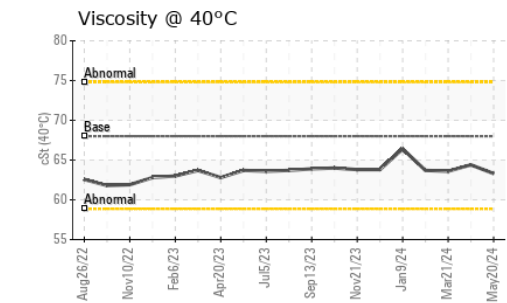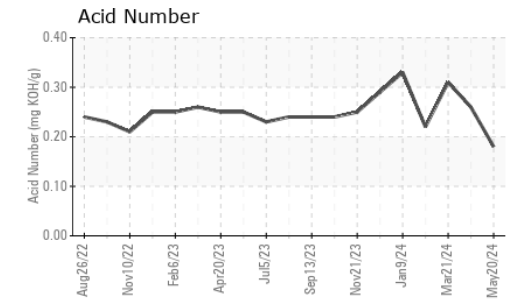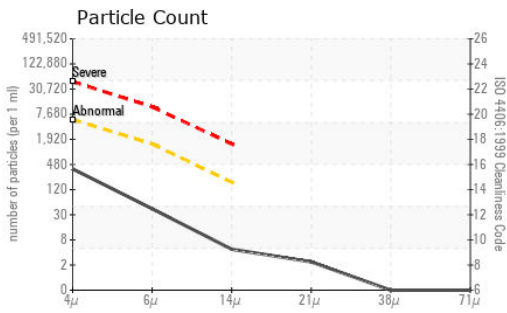

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0002220 **Received** : 24 May 2024  
**Lab Number** : 06190940 **Tested** : 29 May 2024  
**Unique Number** : 11047692 **Diagnosed** : 29 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Seattle Iron and Metals**  
 601 S MYRTLE ST  
 SEATTLE, WA  
 US 98108  
 Contact: ADAM THOMAS  
 athomas@seairon.com  
 T: (206)682-0040  
 F: