



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 655K 1T0655KXEEE272750
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (32 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210230	JRMC462466	---
Sample Date		Client Info		22 May 2024	09 Oct 2018	---
Machine Age	hrs	Client Info		2380	1776	---
Oil Age	hrs	Client Info		1776	0	---
Filter Age	hrs	Client Info		1776	0	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	17	17	---
Iron	ppm	ASTM D5185m	>71	1	4	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>6	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>11	<1	2	---
Lead	ppm	ASTM D5185m	>13	0	<1	---
Copper	ppm	ASTM D5185m	>21	2	3	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	2	7	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	2005	2895	---
Particles >6µm		ASTM D7647	>5000	43	251	---
Particles >14µm		ASTM D7647	>640	2	32	---
Particles >21µm		ASTM D7647	>160	0	10	---
Particles >38µm		ASTM D7647	>40	0	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/19/16	18/13/9	19/15/12	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	2	---
Boron	ppm	ASTM D5185m		0	2	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		0	1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		74	288	---
Calcium	ppm	ASTM D5185m	87	683	2463	---
Phosphorus	ppm	ASTM D5185m	727	779	1075	---
Zinc	ppm	ASTM D5185m	900	919	1339	---
Sulfur	ppm	ASTM D5185m	1500	2386	3245	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.87	1.655	---
Visc @ 40°C	cSt	ASTM D445	65	58.2	55.02	---

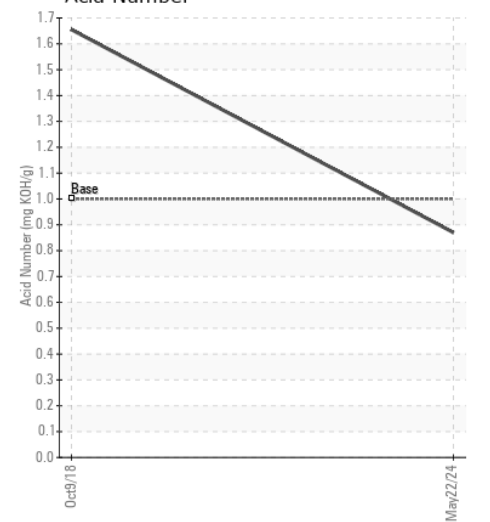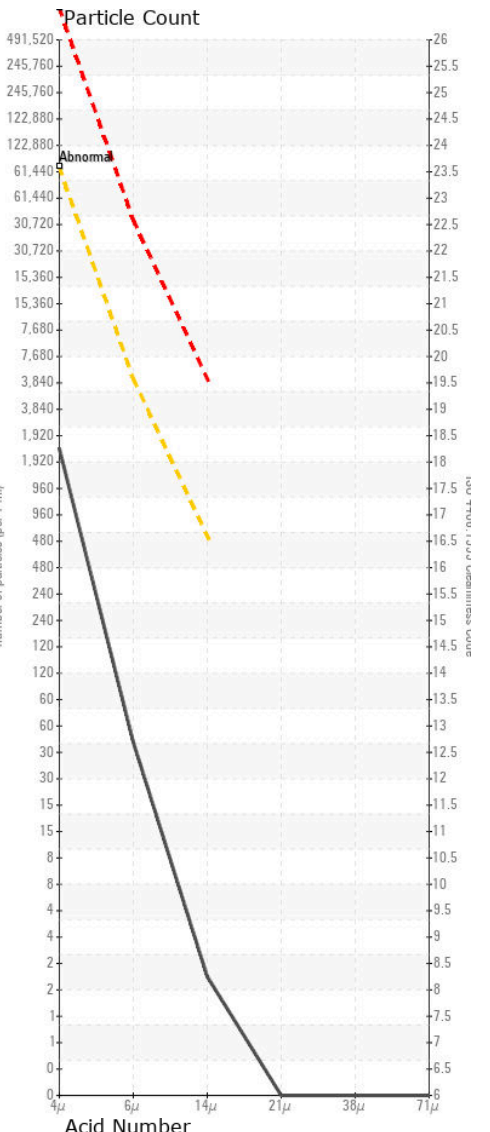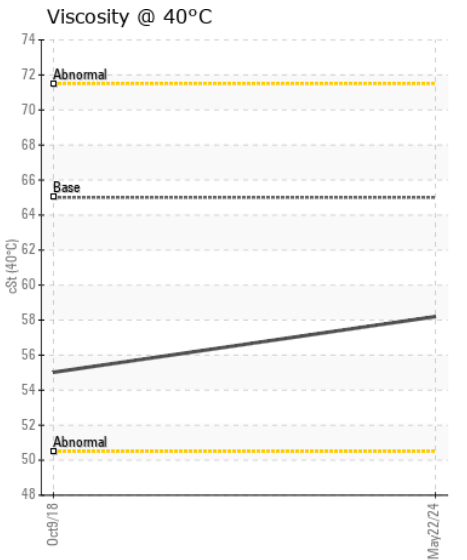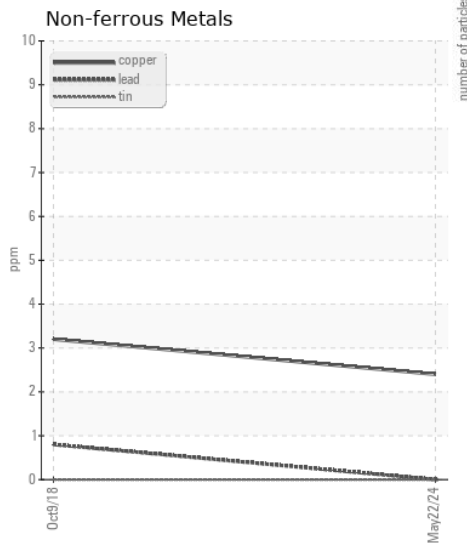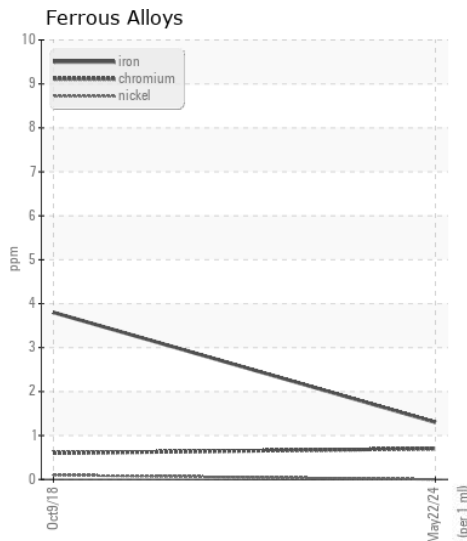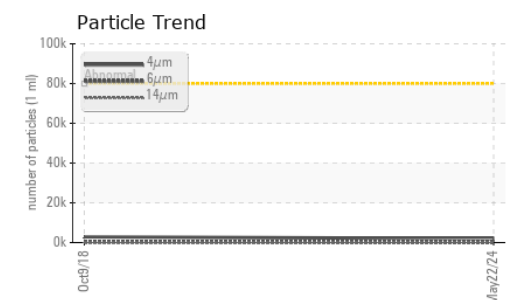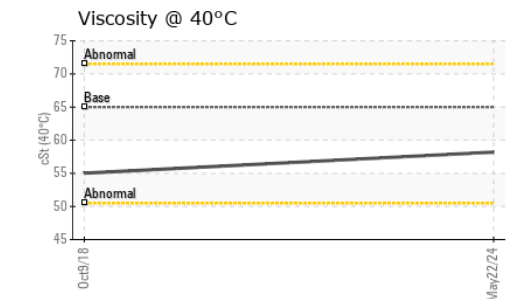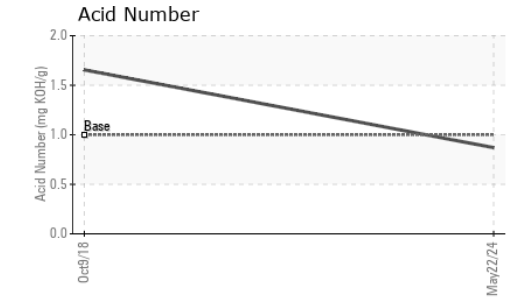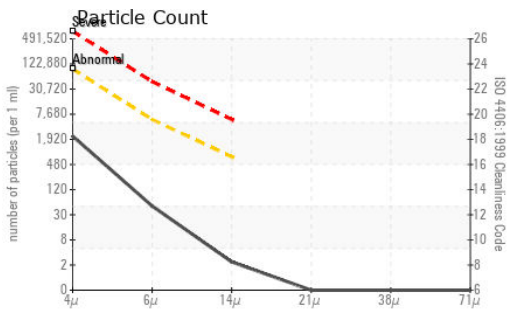

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0210230

Lab Number : 06190949

Unique Number : 11047701

Test Package : CONST (Additional Tests: PQ)

Received : 24 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - STEPHENSON

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

F: (540)693-2588