



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SW RODGERS]

Machine Id

JOHN DEERE 350P 1FF350PAKPF000792

Component

Left Final Drive

Fluid

JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217632	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		1762	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	126	---	---
Iron	ppm	ASTM D5185m	>750	▲ 1064	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 12	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	22	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	---	---
Boron	ppm	ASTM D5185m		74	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		18	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		13	---	---
Phosphorus	ppm	ASTM D5185m		531	---	---
Zinc	ppm	ASTM D5185m		29	---	---
Sulfur	ppm	ASTM D5185m		17280	---	---
Visc @ 40°C	cSt	ASTM D445		186	---	---

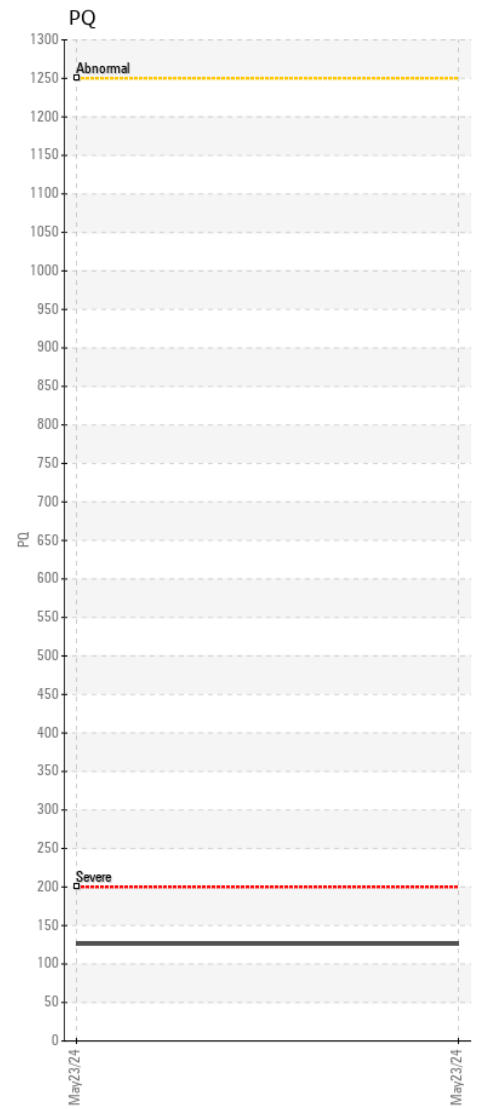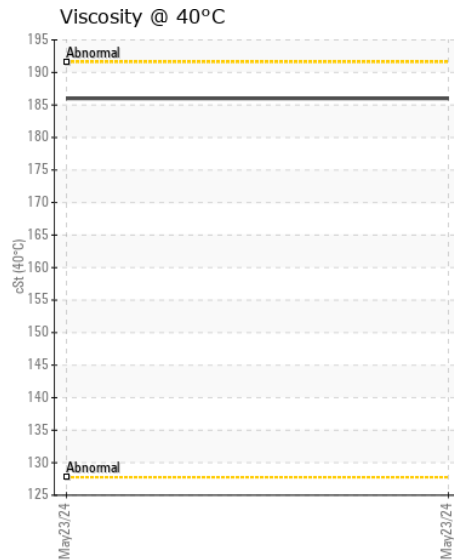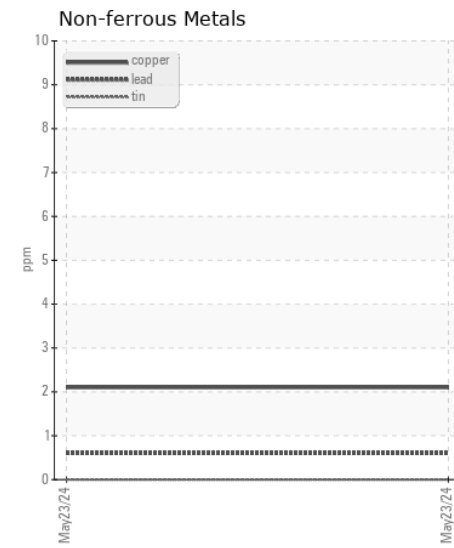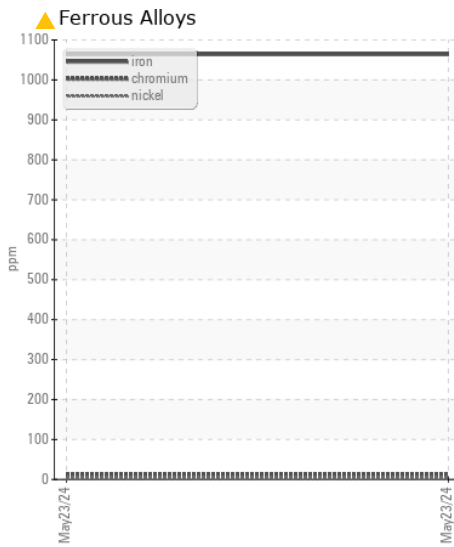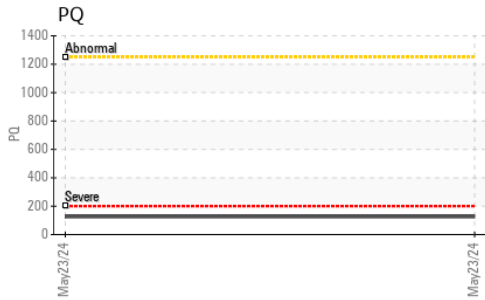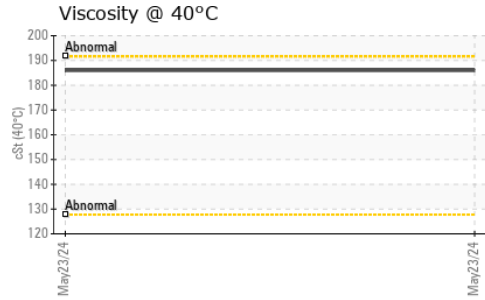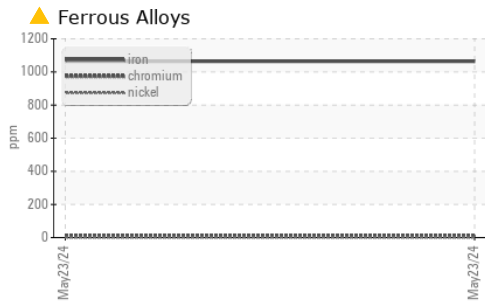

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0217632

Lab Number : 06191298

Unique Number : 11048050

Test Package : CONST (Additional Tests: PQ)

Received : 24 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Sean Felton

JRE - MANASSAS PARK

9107 OWENS DRIVE

MANASSAS PARK, VA

US 20111

Contact: MARC GAUTROIS

mgautrois@jamesriverequipment.com

T: (703)606-7193

F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)