



WEAR	<b>ATTENTION</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 655K 1T0655KXEEE272750**  
Component  
**Right Outer Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0210243</b>	JRMC462471	---
Sample Date		Client Info		<b>22 May 2024</b>	09 Oct 2018	---
Machine Age	hrs	Client Info		<b>2380</b>	1776	---
Oil Age	hrs	Client Info		<b>1776</b>	0	---
Filter Age	hrs	Client Info		<b>1776</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>109</b>	68	---
Iron	ppm	ASTM D5185m	>750	<b>241</b>	81	---
Chromium	ppm	ASTM D5185m	>9	<b>5</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>4</b>	1	---
Titanium	ppm	ASTM D5185m		<b>12</b>	2	---
Silver	ppm	ASTM D5185m		<b>1</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>38</b>	6	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>40	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	<b>▲ 130</b>	28	---
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	8	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>4</b>	2	---
Boron	ppm	ASTM D5185m	6	<b>4</b>	<1	---
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	0	---
Manganese	ppm	ASTM D5185m		<b>4</b>	1	---
Magnesium	ppm	ASTM D5185m	145	<b>112</b>	115	---
Calcium	ppm	ASTM D5185m	3570	<b>3592</b>	3818	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1068</b>	999	---
Zinc	ppm	ASTM D5185m	1640	<b>1337</b>	1214	---
Sulfur	ppm	ASTM D5185m		<b>4064</b>	3177	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.6</b>	54.39	---

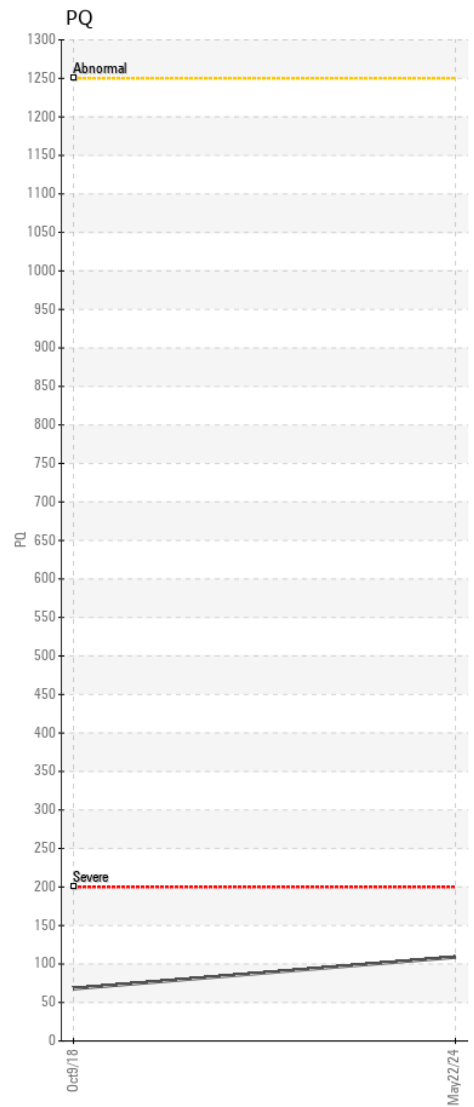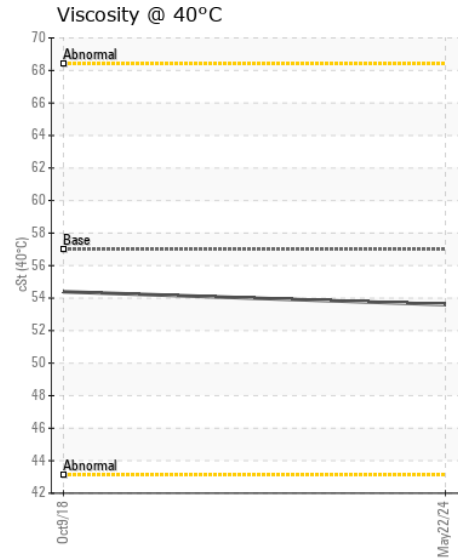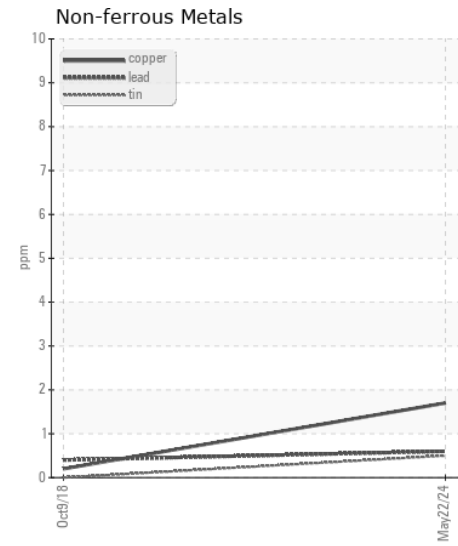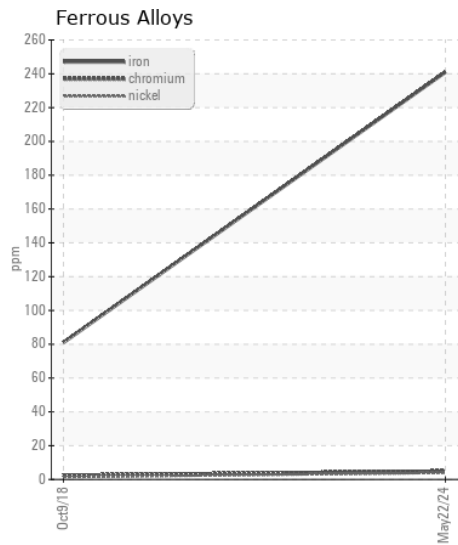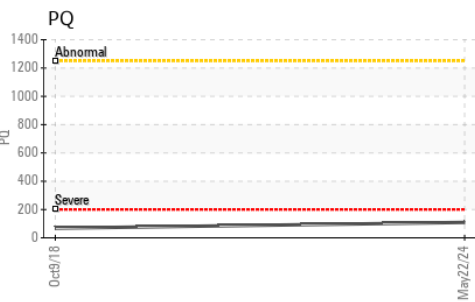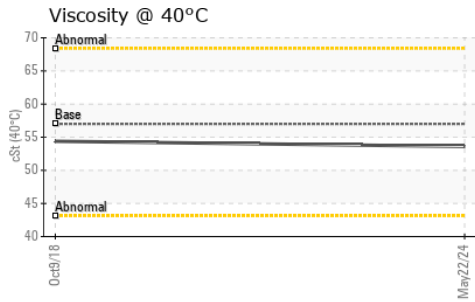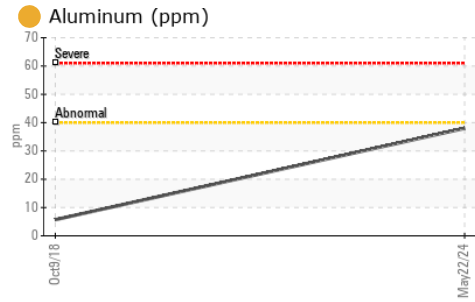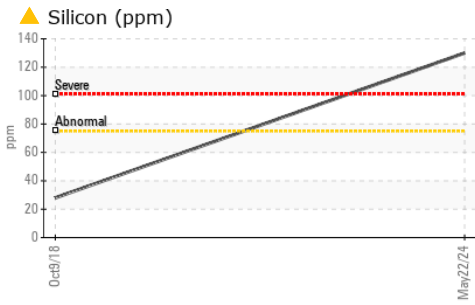

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0210243

**Lab Number** : 06191303

**Unique Number** : 11048055

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 24 May 2024

**Tested** : 29 May 2024

**Diagnosed** : 29 May 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - STEPHENSON**

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

F: (540)693-2588