



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 121854-1253
Component
Rear Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0267092	LH0272747	LH0264397
Sample Date		Client Info		17 May 2024	02 Jan 2024	04 Aug 2023
Machine Age	hrs	Client Info		8113	6976	6007
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>190	14	13	38
Chromium	ppm	ASTM D5185m	>2	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	0	2	<1
Lead	ppm	ASTM D5185m	>15	0	<1	0
Copper	ppm	ASTM D5185m	>70	<1	<1	3
Tin	ppm	ASTM D5185m	>2	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>20	<1	2	3
Potassium	ppm	ASTM D5185m	>20	0	1	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>170	2	0	1
Boron	ppm	ASTM D5185m	400	0	1	7
Barium	ppm	ASTM D5185m	200	<1	0	0
Molybdenum	ppm	ASTM D5185m	12	2	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	12	1	2	4
Calcium	ppm	ASTM D5185m	150	54	37	41
Phosphorus	ppm	ASTM D5185m	1650	968	771	803
Zinc	ppm	ASTM D5185m	125	31	9	18
Sulfur	ppm	ASTM D5185m	22500	25087	24519	28402
Visc @ 40°C	cSt	ASTM D445	143	116	124	133

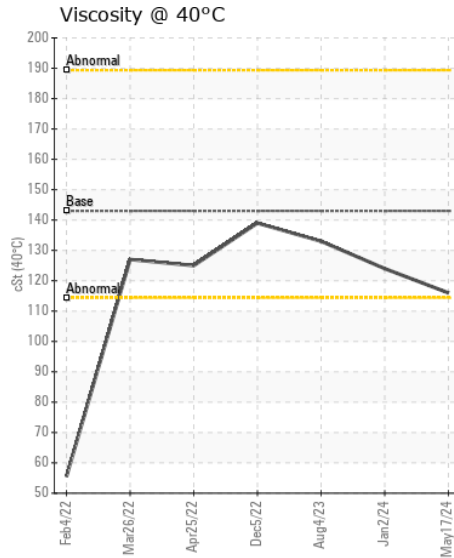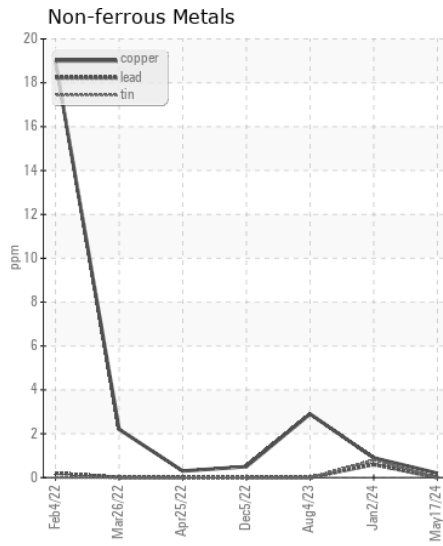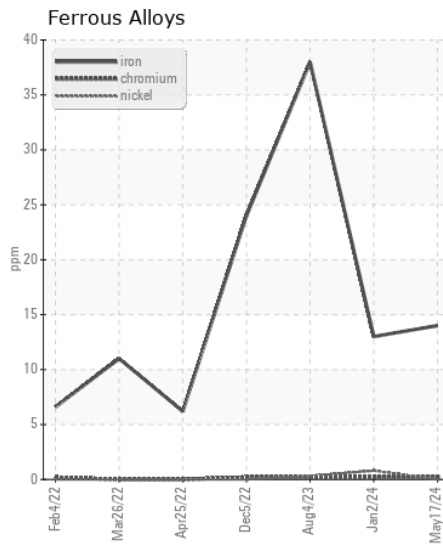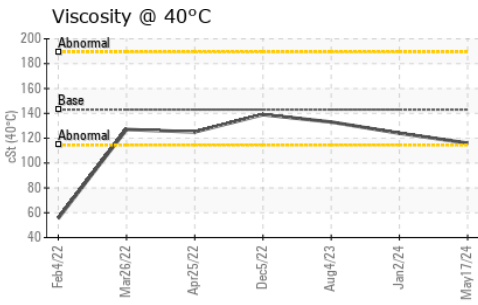

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0267092
Lab Number : 06191355
Unique Number : 11048107
Test Package : CONST

Received : 24 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Wes Davis

AMERICAN STATE EQUIPMENT CO.
 2400 NORTH 14TH AVENUE
 WAUSAU, WI
 US 54401

Contact: CHRIS BARTNIK
 cbartnik@amstate.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)675-6900
 F: (715)675-9748