



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(YA139895) GFL035

Machine Id
3775

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116487	GFL0085231	GFL0071616
Sample Date		Client Info		22 May 2024	11 Jan 2024	30 Aug 2023
Machine Age	hrs	Client Info		0	8193	8193
Oil Age	hrs	Client Info		600	600	600
Filter Age	hrs	Client Info		0	600	600
Oil Changed		Client Info		Not Chngd	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	5	5	8
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	1	2	1
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	0	5
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	6	5
Potassium	ppm	ASTM D5185m	>20	2	1	3
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.1	5.8	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	18.3	19.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	1
Boron	ppm	ASTM D5185m	2	4	5	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	59	59	60
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	970	911	863
Calcium	ppm	ASTM D5185m	1050	1185	1041	1064
Phosphorus	ppm	ASTM D5185m	995	1109	1070	994
Zinc	ppm	ASTM D5185m	1180	1286	1252	1171
Sulfur	ppm	ASTM D5185m	2600	3809	3143	3165
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	13.6	15.1
Base Number (BN)	mg KOH/g	ASTM D2896		9.1	8.9	8.4
Visc @ 100°C	cSt	ASTM D445	12.00	14.2	14.1	13.8

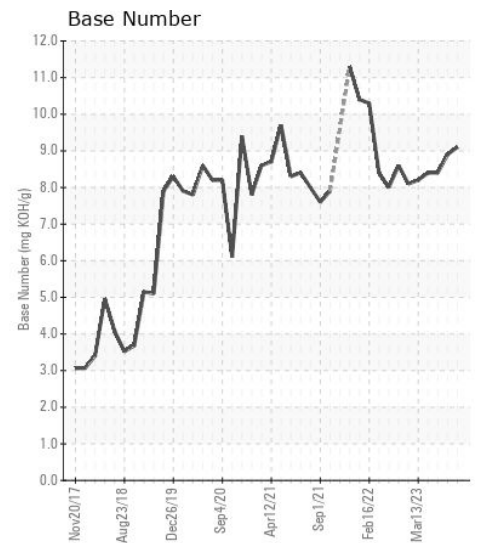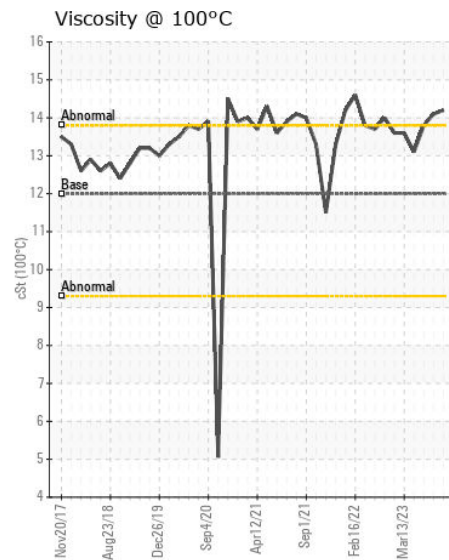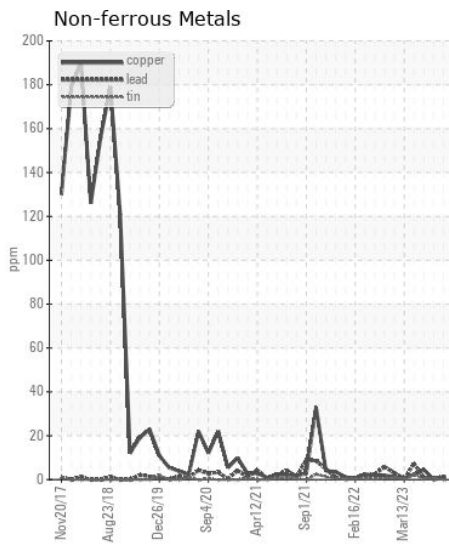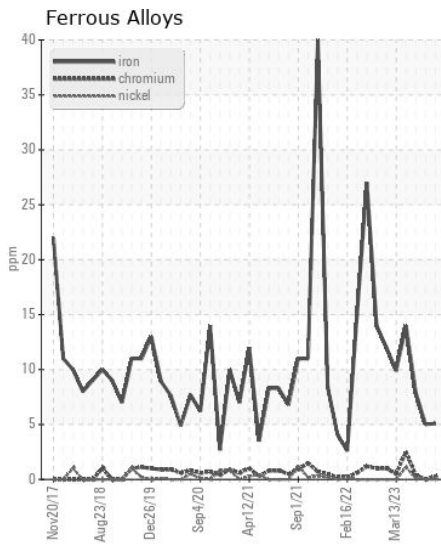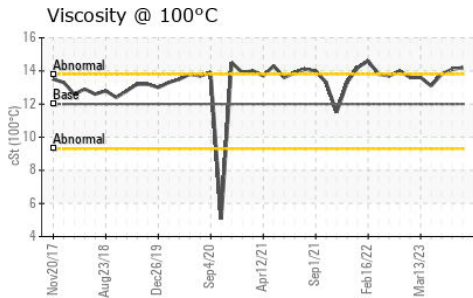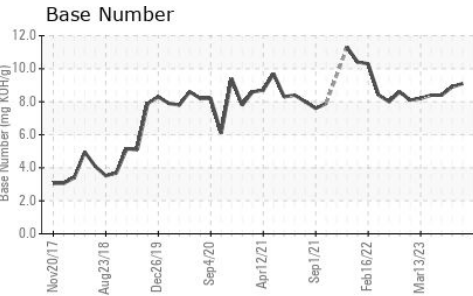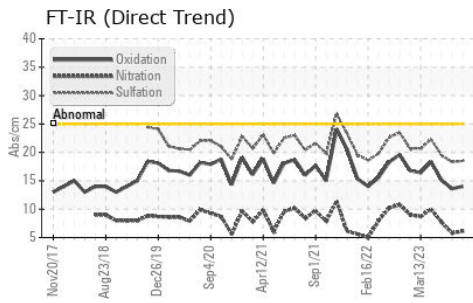

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0116487

Lab Number : 06191457

Unique Number : 11048209

Test Package : FLEET

Received : 24 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Angela Borella

GFL Environmental - 035 - Greensboro

1236 Elon Place

High Point, NC

US 27263

Contact: JORGE COSTA

jorge.costa@gflenv.com

T: (336)668-3712

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)