



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**KOMATSU PC-350 TH-9 (S/N A10453)**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (10 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CL0005461</b>	CL0004588	CL0003664
Sample Date		Client Info		<b>16 May 2024</b>	14 Aug 2023	21 Oct 2022
Machine Age	hrs	Client Info		<b>13500</b>	13225	13000
Oil Age	hrs	Client Info		<b>275</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>7</b>	7	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	9.0	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.9	21.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	2	0
Boron	ppm	ASTM D5185m	250	<b>83</b>	65	65
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>84</b>	92	86
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>31</b>	24	26
Calcium	ppm	ASTM D5185m	3000	<b>2413</b>	2292	2307
Phosphorus	ppm	ASTM D5185m	1150	<b>1126</b>	1016	1006
Zinc	ppm	ASTM D5185m	1350	<b>1312</b>	1274	1229
Sulfur	ppm	ASTM D5185m	4250	<b>4612</b>	4261	4328
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	14.3	16.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.5</b>	7.2	8.4
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.9</b>	14.1	14.5

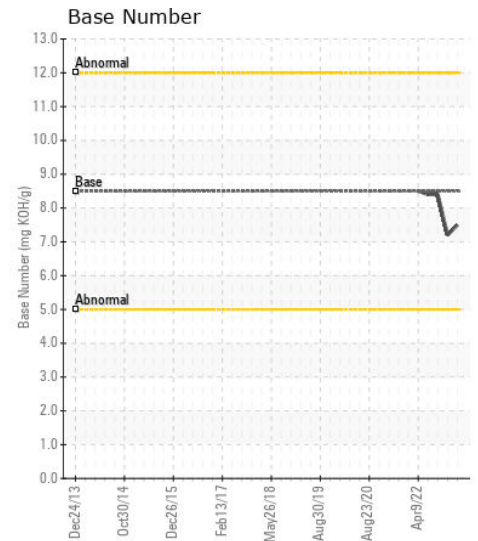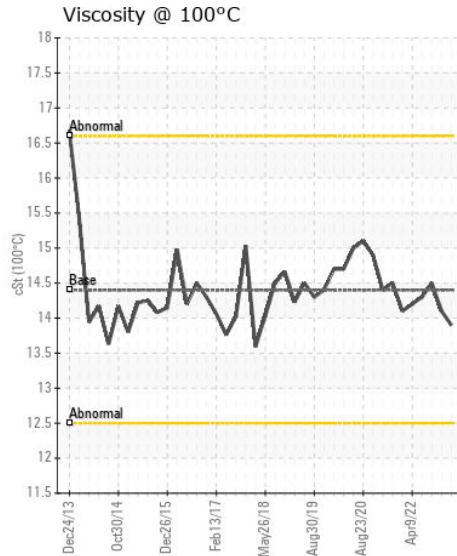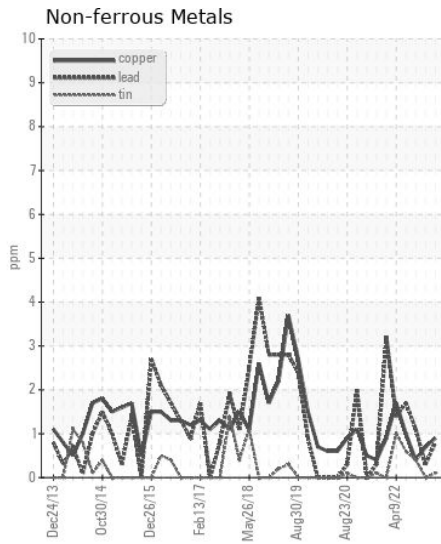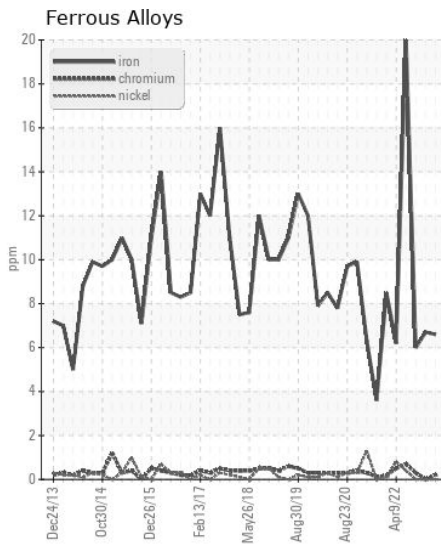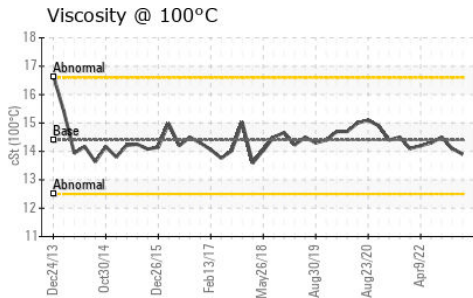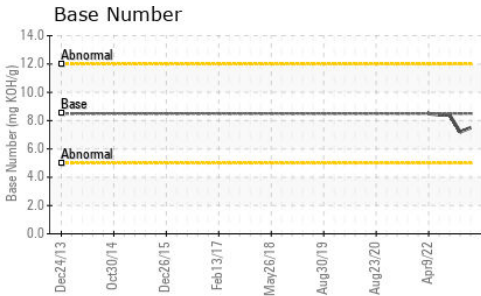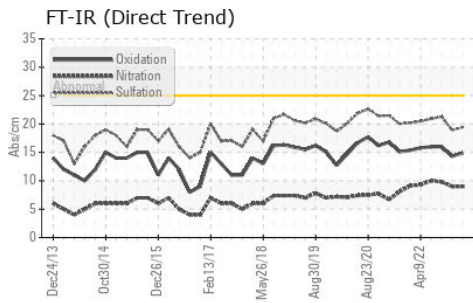

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : CL0005461 **Received** : 24 May 2024  
**Lab Number** : 06191473 **Tested** : 29 May 2024  
**Unique Number** : 11048225 **Diagnosed** : 29 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**PEDULLA**  
 146 MCLELLAND  
 MOORESVILLE, NC  
 US 28115  
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: