



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 650K 1T0650KXTEE271958
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210220	JR0030750	---
Sample Date		Client Info		22 May 2024	09 Dec 2019	---
Machine Age	hrs	Client Info		1631	1091	---
Oil Age	hrs	Client Info		1091	0	---
Filter Age	hrs	Client Info		1091	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	38	48	---
Chromium	ppm	ASTM D5185m	>11	<1	0	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>31	3	4	---
Lead	ppm	ASTM D5185m	>26	1	0	---
Copper	ppm	ASTM D5185m	>26	3	4	---
Tin	ppm	ASTM D5185m	>4	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	5	6	---
Potassium	ppm	ASTM D5185m	>20	10	10	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.2	7.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	21.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	3	---
Boron	ppm	ASTM D5185m		177	227	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		29	192	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		108	711	---
Calcium	ppm	ASTM D5185m		2248	1519	---
Phosphorus	ppm	ASTM D5185m		1001	782	---
Zinc	ppm	ASTM D5185m		1230	1005	---
Sulfur	ppm	ASTM D5185m		4087	2563	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.5	16.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	9.5	---
Visc @ 100°C	cSt	ASTM D445		14.2	14.7	---


FT-IR (Direct Trend)

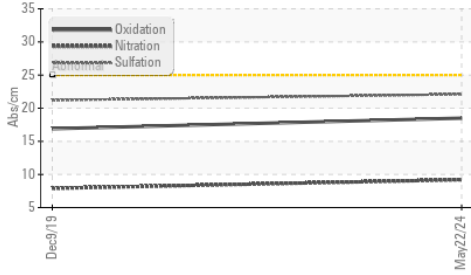


Ferrous Alloys

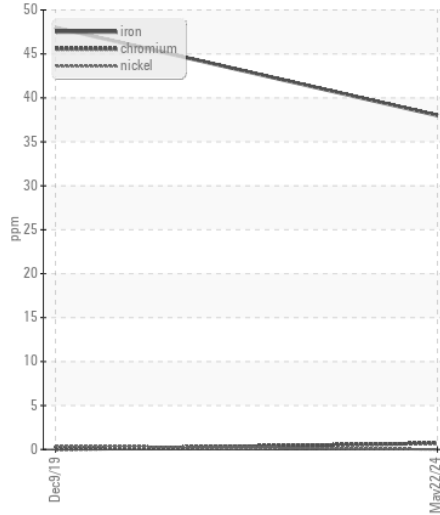


Base Number

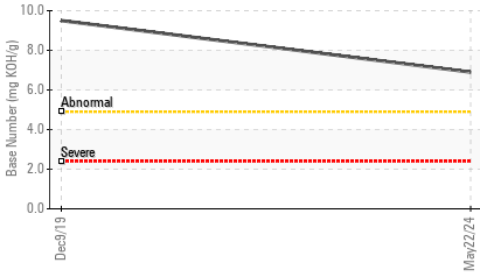


Non-ferrous Metals

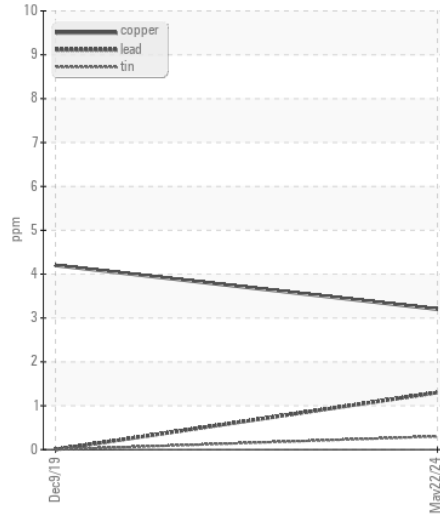


Viscosity @ 100°C

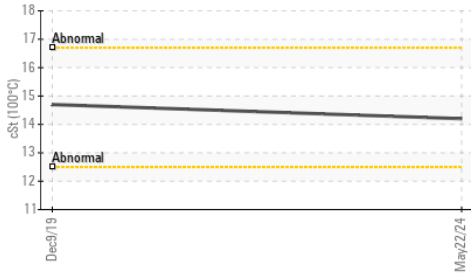

Viscosity @ 100°C

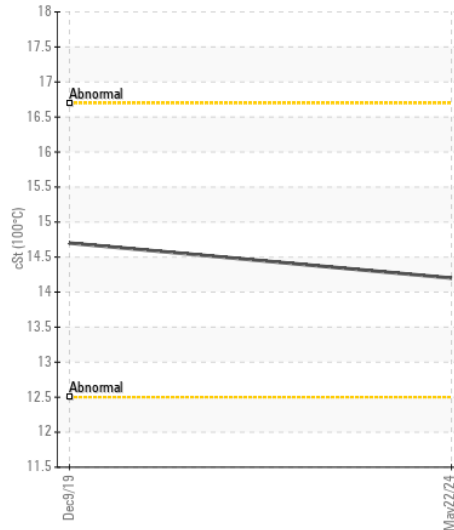

Base Number

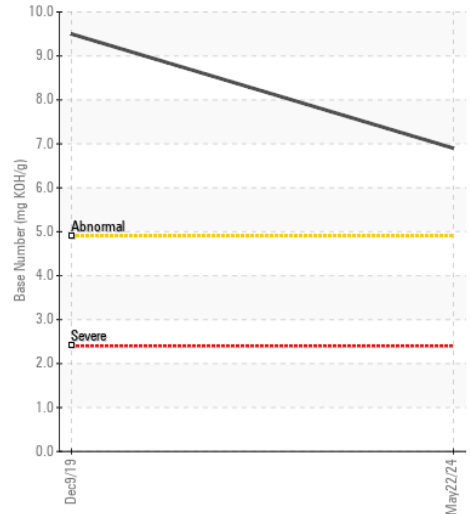

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0210220

Lab Number : 06191495

Unique Number : 11048247

Test Package : CONST (Additional Tests: TBN)

Received : 24 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Wes Davis

JRE - STEPHENSON

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (540)693-2588