



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
022
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP E6 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DE0000528	DE0000617	DE0000283
Sample Date		Client Info		09 May 2024	28 Jan 2024	02 Aug 2023
Machine Age	mls	Client Info		56823	40286	24982
Oil Age	mls	Client Info		16000	15000	13100
Filter Age	mls	Client Info		16000	15000	13100
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>90	22	23	6
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	12	13	5
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	1	2	1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	4
Potassium	ppm	ASTM D5185m	>20	27	34	14
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.6	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.5	8.0	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	19.0	17.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	<1
Boron	ppm	ASTM D5185m	0	3	4	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	60	56	60
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	80	966	1009	1042
Calcium	ppm	ASTM D5185m	2400	1077	1077	1154
Phosphorus	ppm	ASTM D5185m	750	1075	1011	1091
Zinc	ppm	ASTM D5185m	840	1268	1248	1373
Sulfur	ppm	ASTM D5185m	2130	3473	2953	4102
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.1	14.7	12.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	8.0	8.3	8.8
Visc @ 100°C	cSt	ASTM D445	14.2	12.8	12.8	14.2

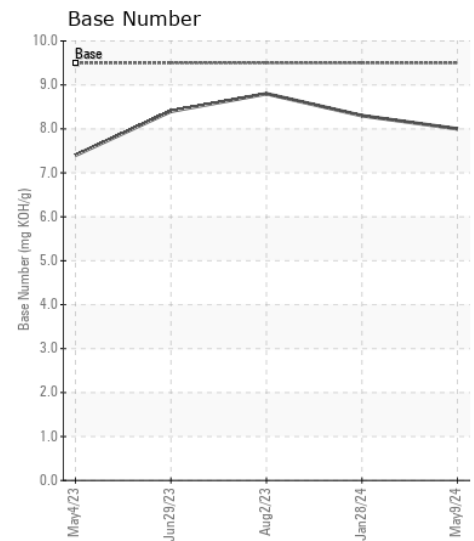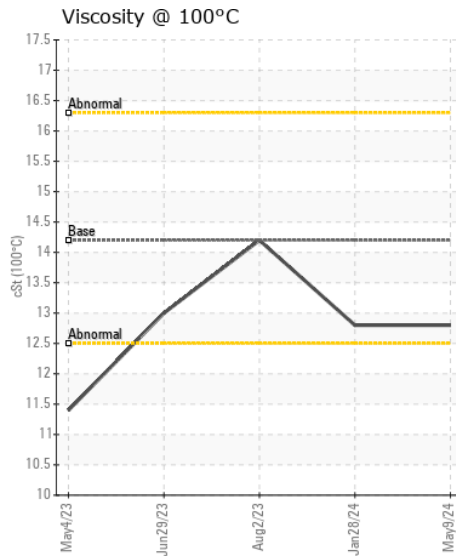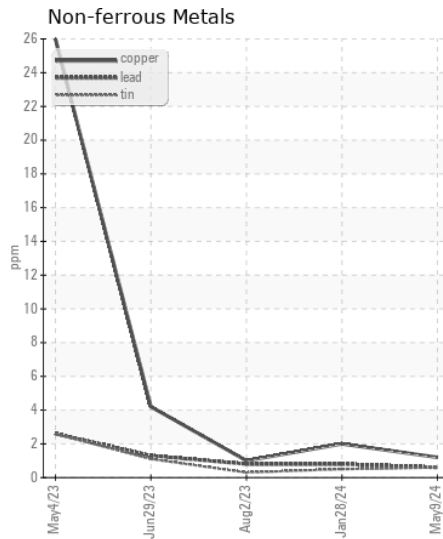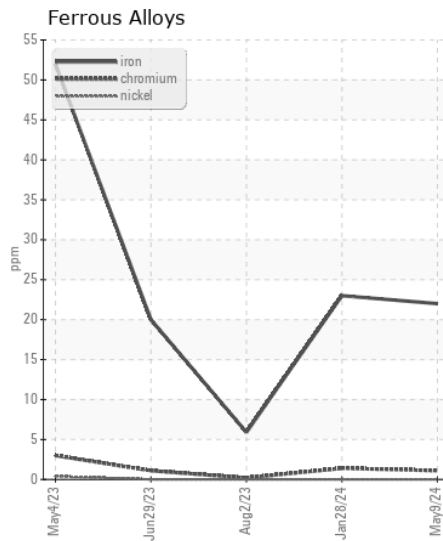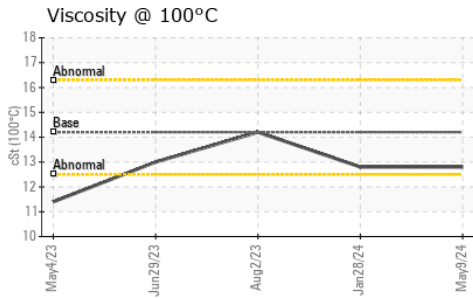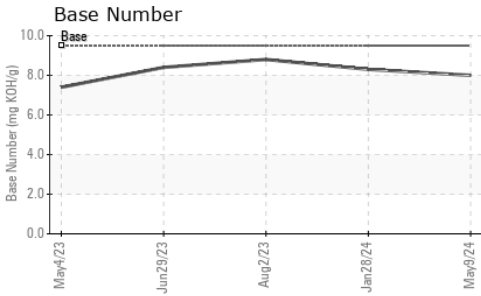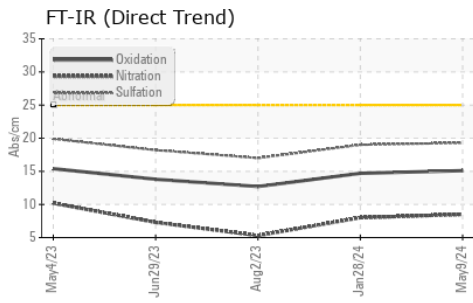

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : DE0000528

Lab Number : 06191667

Unique Number : 11048419

Test Package : FLEET

Received : 24 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Wes Davis

Iroquois Bar Corp.

155 Commerce Drive

Lacakwana, NY

US 14218

Contact: Denver Persinger

dpersinger@iroquoisbar.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)