



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
72229
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0920973	WC0681116	WC0680999
Sample Date		Client Info		29 Apr 2024	27 Jan 2024	09 Dec 2023
Machine Age	hrs	Client Info		4277	2493	1594
Oil Age	hrs	Client Info		1033	899	820
Filter Age	hrs	Client Info		1033	899	820
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	17	16
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		18	17	16
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	▲ 66	6	10
Lead	ppm	ASTM D5185m	>40	0	<1	2
Copper	ppm	ASTM D5185m	>330	12	23	56
Tin	ppm	ASTM D5185m	>15	<1	1	2
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	5	6
Potassium	ppm	ASTM D5185m	>20	13	8	10
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	10.1	10.5	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	21.9	20.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	2	2	3
Boron	ppm	ASTM D5185m	250	42	30	36
Barium	ppm	ASTM D5185m	10	0	0	<1
Molybdenum	ppm	ASTM D5185m	100	31	33	33
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	450	815	820	741
Calcium	ppm	ASTM D5185m	3000	1704	1620	1632
Phosphorus	ppm	ASTM D5185m	1150	792	764	742
Zinc	ppm	ASTM D5185m	1350	912	894	832
Sulfur	ppm	ASTM D5185m	4250	3360	2837	2555
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	19.9	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.5	6.5	7.0
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	13.8	13.7

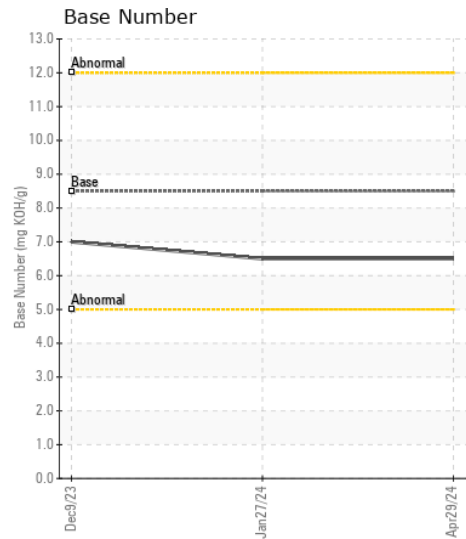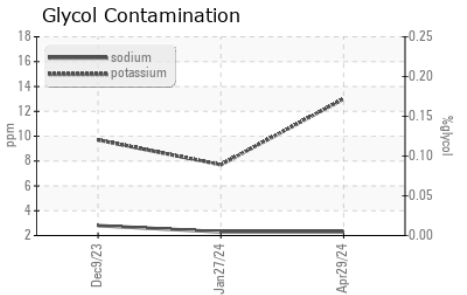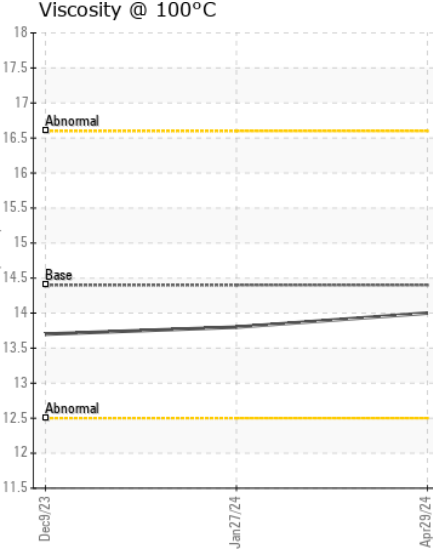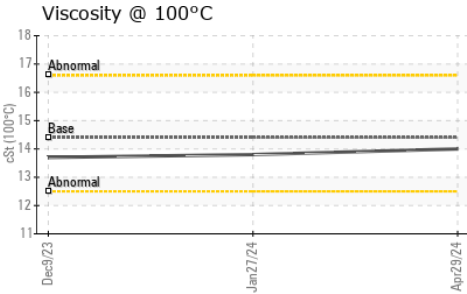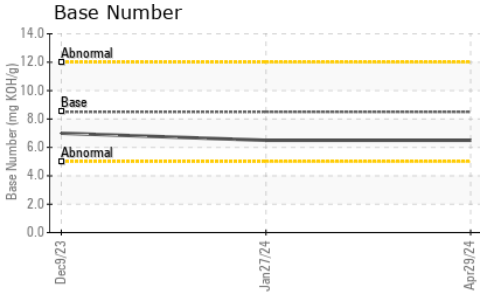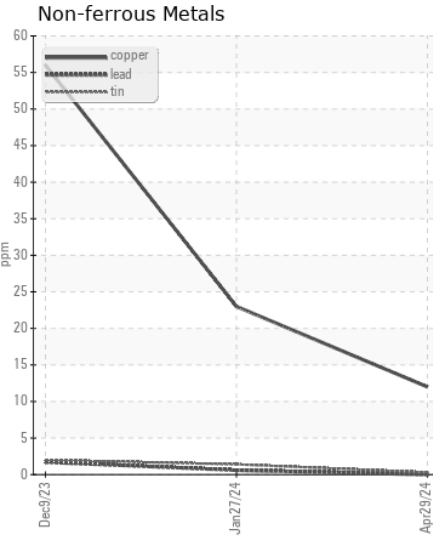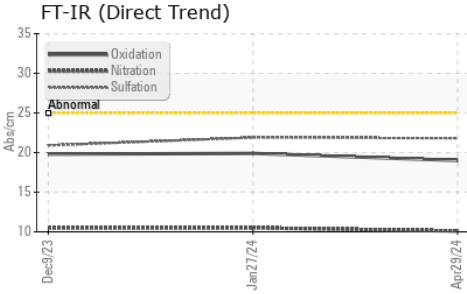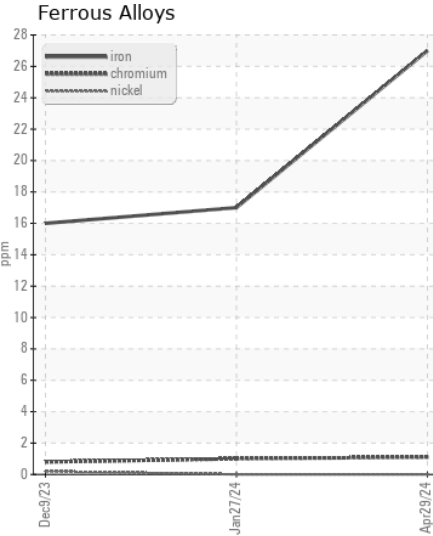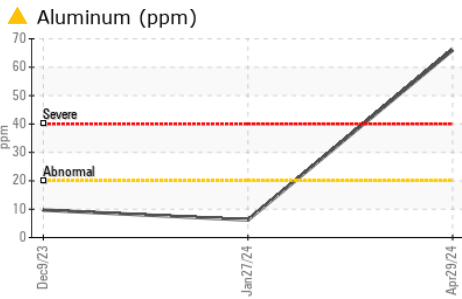

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0920973 **Received** : 24 May 2024
Lab Number : 06191695 **Tested** : 29 May 2024
Unique Number : 11048447 **Diagnosed** : 29 May 2024 - Angela Borella
Test Package : FLEET (Additional Tests: Glycol)

NANA LYNDEN LOGISTICS
 P.O. BOX 570
 KOTZEBUE, AK
 US 99752

Contact: Mark Tatlow
 nanalynden@lynden.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (907)754-5551
 F: (800)418-0974