



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**72226**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0681067</b>	WC0680986	WC0681097
Sample Date		Client Info		<b>21 Apr 2024</b>	27 Jan 2024	20 Sep 2023
Machine Age	hrs	Client Info		<b>4631</b>	3221	701
Oil Age	hrs	Client Info		<b>667</b>	625	701
Filter Age	hrs	Client Info		<b>667</b>	625	701
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>84</b>	26	88
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	4
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>17</b>	17	21
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>11</b>	5	55
Lead	ppm	ASTM D5185m	>40	<b>3</b>	3	10
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>7</b>	6	11
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	4	103
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.6	2.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.2</b>	10.4	11.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.0</b>	22.8	26.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	4	6
Boron	ppm	ASTM D5185m	151	<b>48</b>	45	50
Barium	ppm	ASTM D5185m	0.4	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m	250	<b>30</b>	30	39
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m	0	<b>813</b>	772	908
Calcium	ppm	ASTM D5185m	2046	<b>1605</b>	1523	1904
Phosphorus	ppm	ASTM D5185m	1043	<b>768</b>	731	861
Zinc	ppm	ASTM D5185m	943	<b>867</b>	844	1047
Sulfur	ppm	ASTM D5185m	5012	<b>3244</b>	2967	3853
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.5</b>	19.0	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	<b>6.4</b>	6.4	6.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>15.0</b>	14.5	15.7


**FT-IR (Direct Trend)**

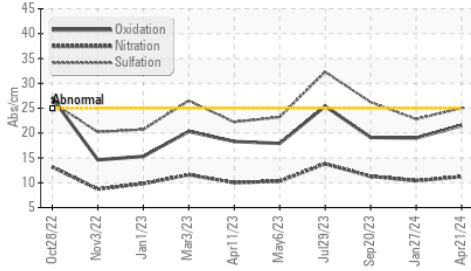


**Base Number**

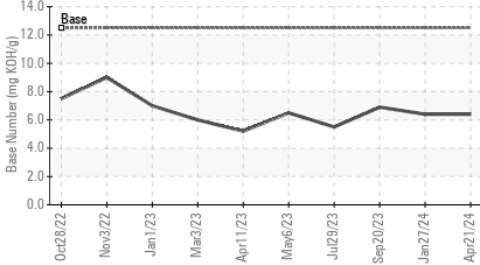


**Viscosity @ 100°C**

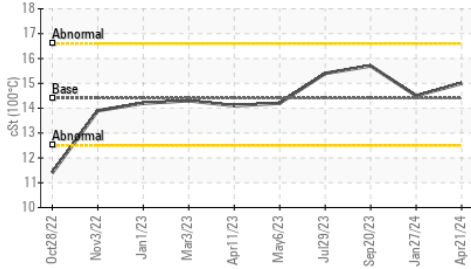


**Ferrous Alloys**

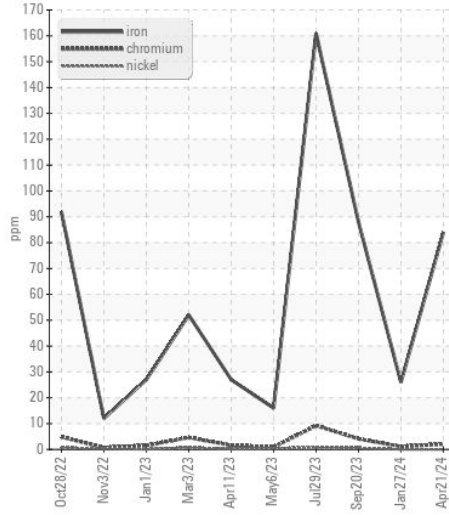


**Non-ferrous Metals**

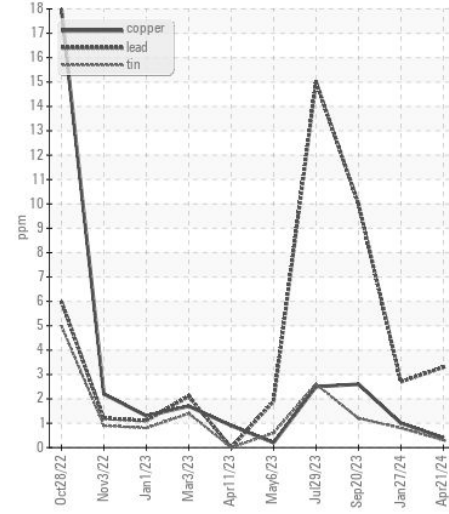

**Viscosity @ 100°C**

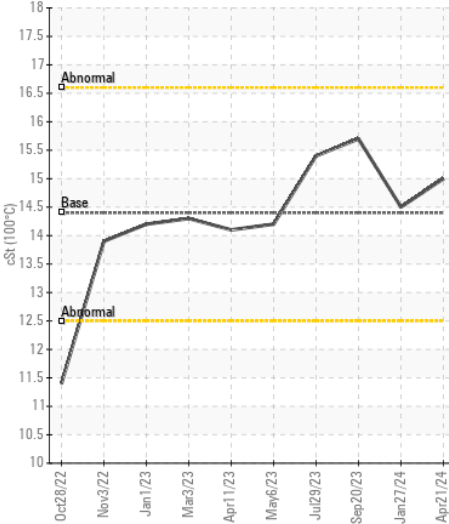

**Base Number**

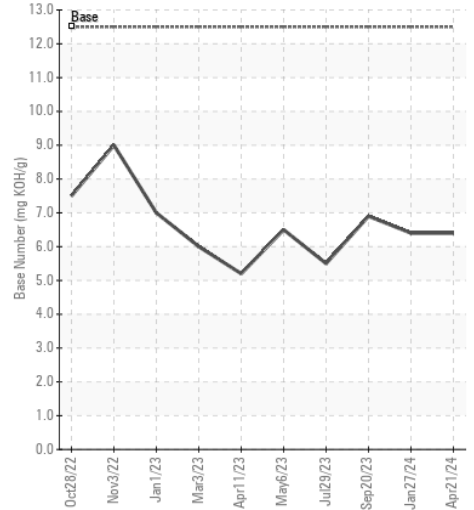

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0681067  
**Lab Number** : 06191697  
**Unique Number** : 11048449  
**Test Package** : FLEET

**Received** : 24 May 2024  
**Tested** : 29 May 2024  
**Diagnosed** : 29 May 2024 - Angela Borella

**NANA LYNDEN LOGISTICS**  
 P.O. BOX 570  
 KOTZEBUE, AK  
 US 99752  
 Contact: Mark Tatlow  
 nanalynden@lynden.com  
 T: (907)754-5551  
 F: (800)418-0974

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)