



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**12377**  
Component  
**Gasoline Engine**  
Fluid  
**GASOLINE ENGINE OIL SAE 0W20 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0924453</b>	WC0786155	WC0856942
Sample Date		Client Info		<b>22 May 2024</b>	05 Feb 2024	02 Nov 2023
Machine Age	mls	Client Info		<b>22554</b>	13484	427
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>37</b>	38	61
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>15</b>	6	10
Lead	ppm	ASTM D5185m	>50	<b>0</b>	1	2
Copper	ppm	ASTM D5185m	>155	<b>88</b>	99	195
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	<b>14</b>	19	15
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	17
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	0.8
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>16.8</b>	12.2	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.7</b>	25.4	23.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	<b>3</b>	4	9
Boron	ppm	ASTM D5185m	75	<b>73</b>	35	24
Barium	ppm	ASTM D5185m	5	<b>0</b>	<1	4
Molybdenum	ppm	ASTM D5185m	100	<b>96</b>	214	203
Manganese	ppm	ASTM D5185m		<b>14</b>	9	22
Magnesium	ppm	ASTM D5185m	12	<b>1016</b>	635	596
Calcium	ppm	ASTM D5185m	2100	<b>1322</b>	970	908
Phosphorus	ppm	ASTM D5185m	650	<b>827</b>	531	475
Zinc	ppm	ASTM D5185m	850	<b>972</b>	711	634
Sulfur	ppm	ASTM D5185m	2500	<b>2170</b>	2400	1906
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>25.7</b>	22.9	21.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.3</b>	3.4	3.9
Visc @ 100°C	cSt	ASTM D445	7.5	<b>12.6</b>	12.8	12.1


**FT-IR (Direct Trend)**

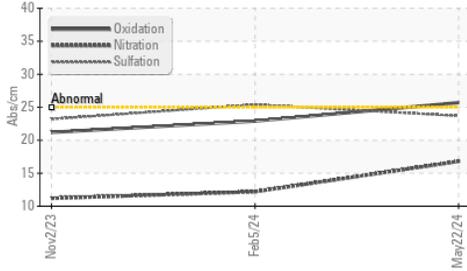


**Base Number**

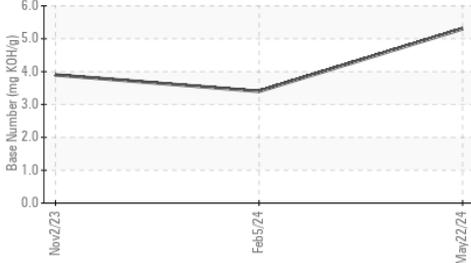


**Viscosity @ 100°C**

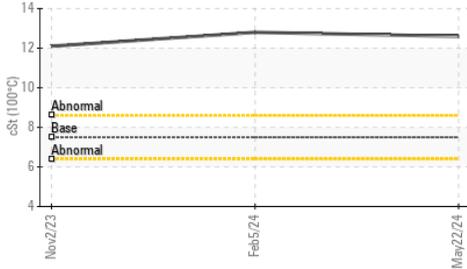


**Ferrous Alloys**

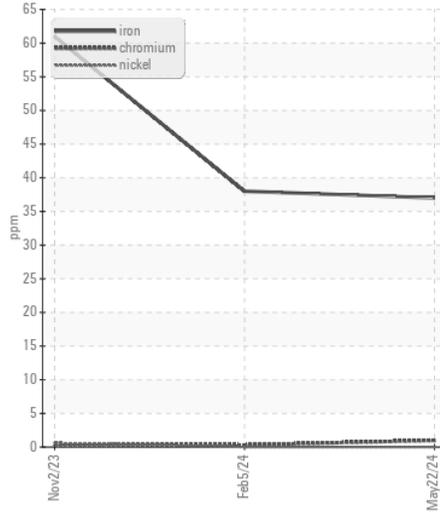


**Non-ferrous Metals**

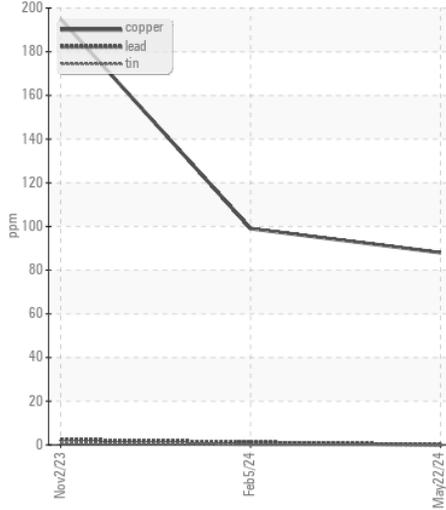

**Viscosity @ 100°C**

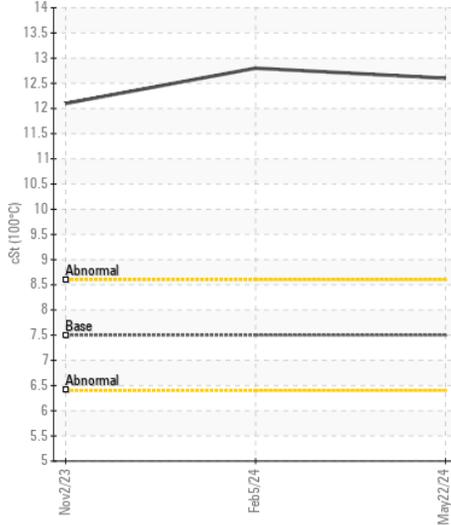

**Base Number**

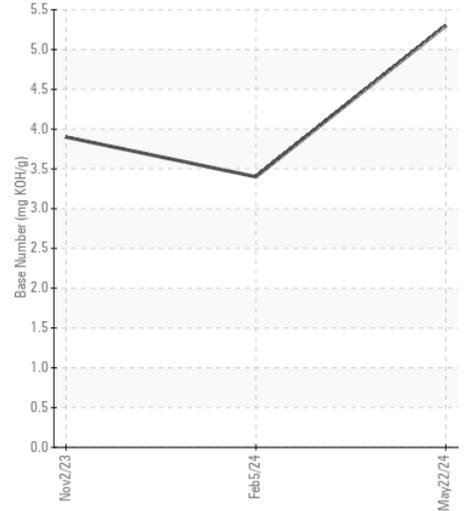

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0924453 **Received** : 24 May 2024  
**Lab Number** : 06191717 **Tested** : 29 May 2024  
**Unique Number** : 11048469 **Diagnosed** : 29 May 2024 - Angela Borella  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**SULLIVAN EASTERN INC**  
 2860 C SLATER RD  
 MORRISVILLE, NC  
 US 27560

Contact: SCOTT SULLIVAN  
 ssullivan@sullivaneastern.com

T: (919)484-8993

F: (919)484-2136