



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SHALLCROSS
Machine Id
VOLVO PENTA VOLVO PENTA D-6 (S/N NOT GIVEN)
Component
Starboard Diesel Engine
Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA057126	---	---
Sample Date		Client Info		15 Nov 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	13	---	---
Chromium	ppm	ASTM D5185m	>6	1	---	---
Nickel	ppm	ASTM D5185m	>2	1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	1	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>95	2	---	---
Copper	ppm	ASTM D5185m	>85	3	---	---
Tin	ppm	ASTM D5185m	>9	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		61	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		999	---	---
Calcium	ppm	ASTM D5185m		1065	---	---
Phosphorus	ppm	ASTM D5185m		1017	---	---
Zinc	ppm	ASTM D5185m		1253	---	---
Sulfur	ppm	ASTM D5185m		3332	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.9	---	---
Visc @ 100°C	cSt	ASTM D445		13.6	---	---

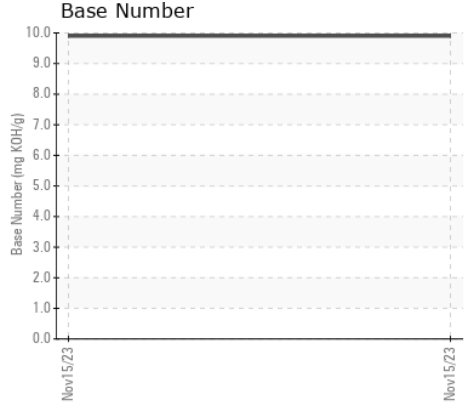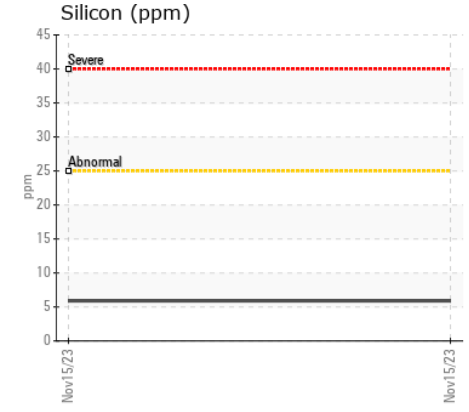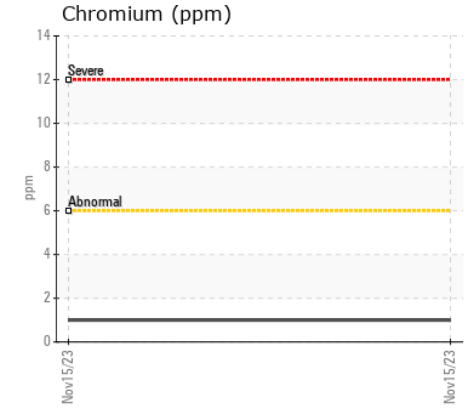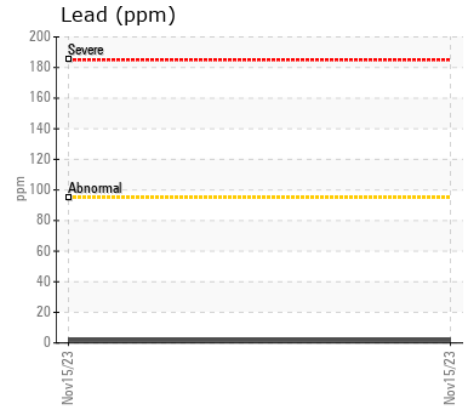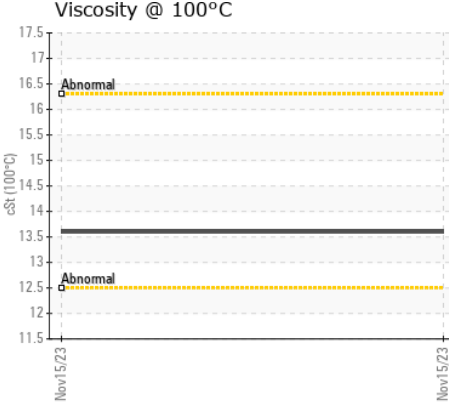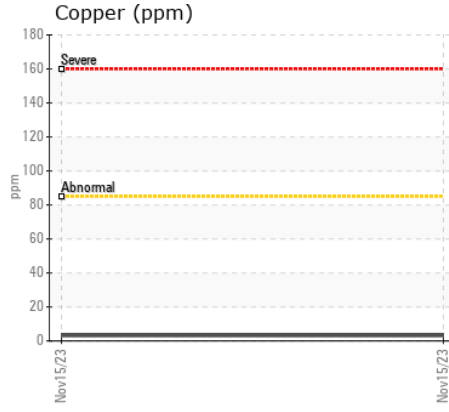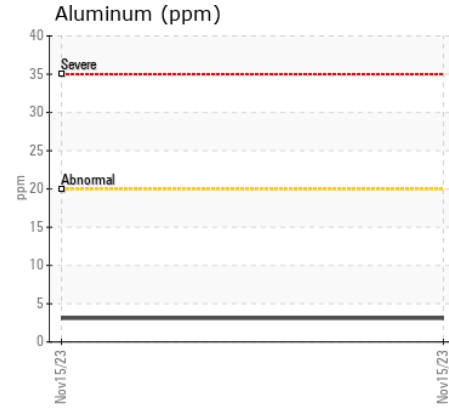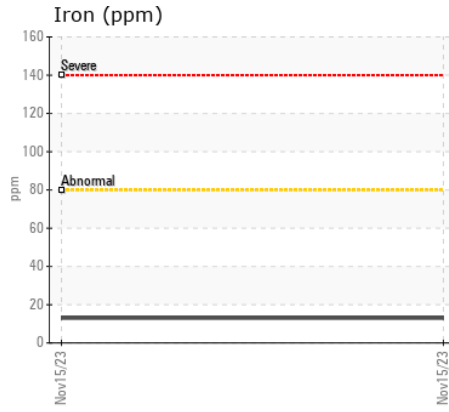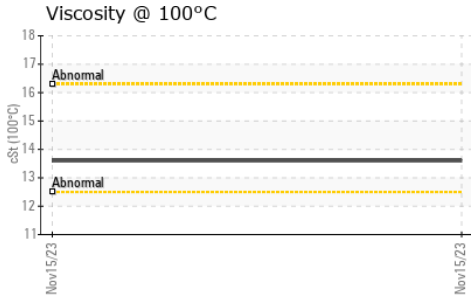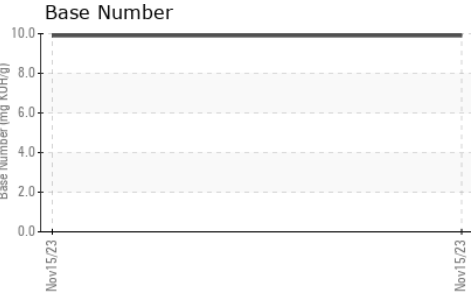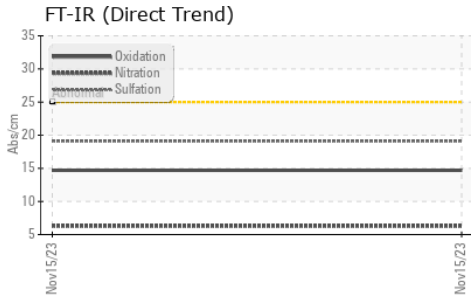

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VPA057126

Lab Number : 06191798

Unique Number : 11048550

Test Package : MOB 1 (Additional Tests: TBN)

Received : 28 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Angela Borella

Point Judith Marina

360 Gooseberry Road

WAKEFIELD, RI

US 02879

Contact: MATT ST. ANGELO

service@pjmarina.com; canastasio@wearcheckusa.com

T: (401)789-7189

F: (401)783-5350

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)