



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A12681]
Machine Id
VOLVO ECR235CL 110022
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454665	VCP425984	VCP354076
Sample Date		Client Info		16 May 2024	31 May 2023	26 Aug 2022
Machine Age	hrs	Client Info		10505	9960	9785
Oil Age	hrs	Client Info		300	250	250
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	4	5
Chromium	ppm	ASTM D5185m	>10	1	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		2	<1	4
Silver	ppm	ASTM D5185m	>2	1	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	<1	2
Lead	ppm	ASTM D5185m	>20	1	0	0
Copper	ppm	ASTM D5185m	>15	1	0	<1
Tin	ppm	ASTM D5185m	>10	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	6	6	3
Potassium	ppm	ASTM D5185m	>20	4	<1	1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.4	6.5	8.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	18.8	23.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	22	3	<1
Boron	ppm	ASTM D5185m		10	35	58
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		17	24	42
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		191	296	482
Calcium	ppm	ASTM D5185m		2187	2195	1603
Phosphorus	ppm	ASTM D5185m		892	936	929
Zinc	ppm	ASTM D5185m		1125	1160	1110
Sulfur	ppm	ASTM D5185m		3548	3877	2801
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.4	14.2	22.2
Base Number (BN)	mg KOH/g	ASTM D2896		6.0	9.0	11.1
Visc @ 100°C	cSt	ASTM D445		13.6	12.9	13.3

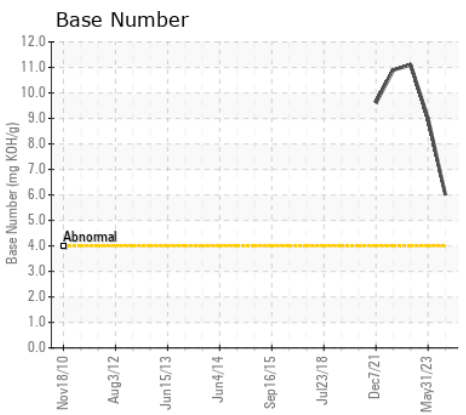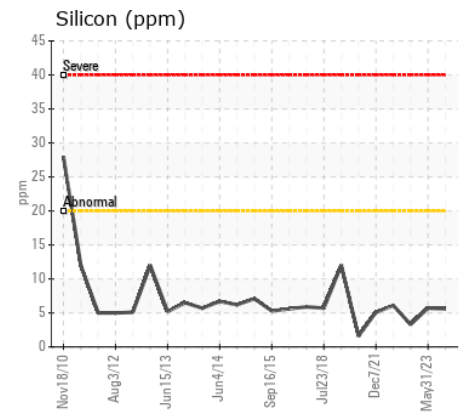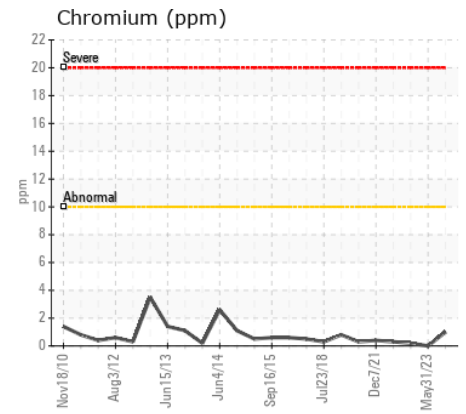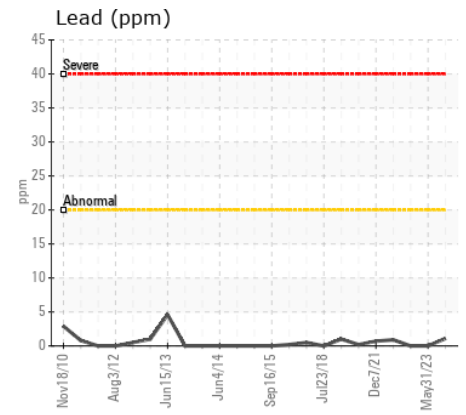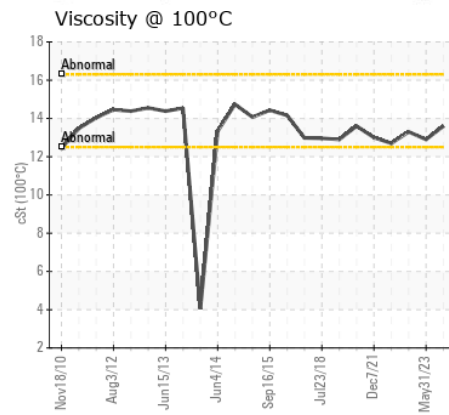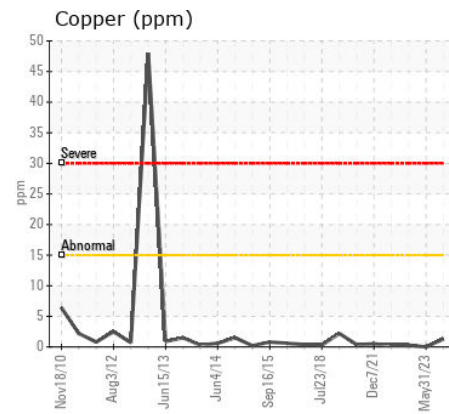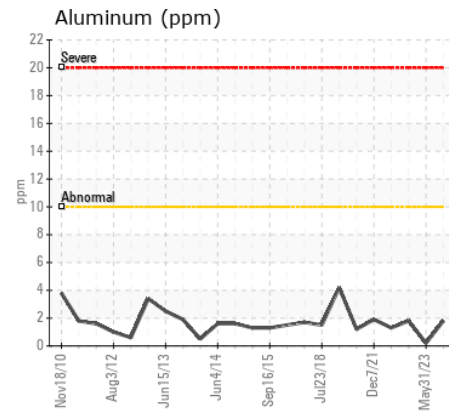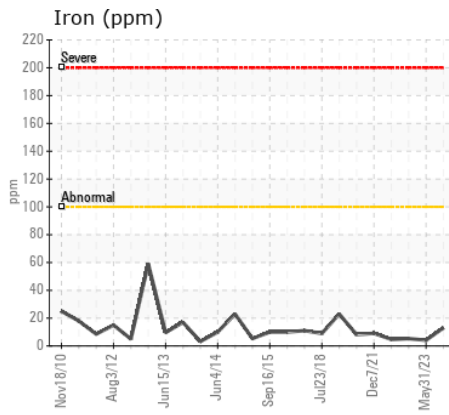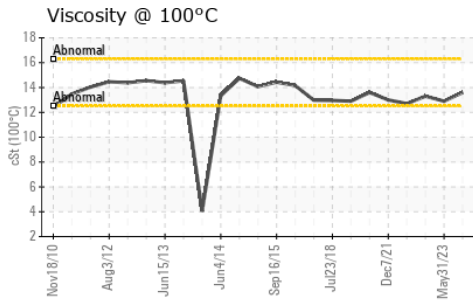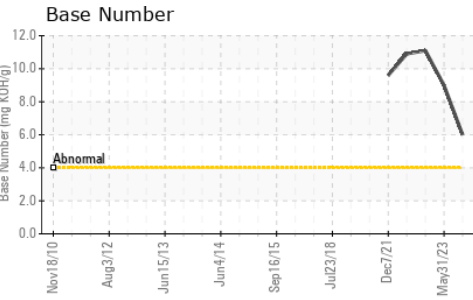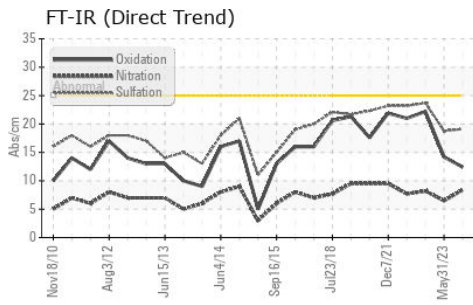

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454665
Lab Number : 06191807
Unique Number : 11048559
Test Package : MOB 1 (Additional Tests: TBN)

JAMES J ANDERSON
 6958 TORRESDALE AVENUE
 PHILADELPHIA, PA
 US 19135
 Contact: JOHN HERBUT
 herb@jjaconstruction.com
 T: (215)850-9051
 F: (215)427-0208

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)