



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(BD38668)**  
Machine Id  
**413022**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0116073</b>	GFL0092977	GFL0092966
Sample Date		Client Info		<b>22 May 2024</b>	19 Feb 2024	27 Nov 2023
Machine Age	hrs	Client Info		<b>2439</b>	1907	1512
Oil Age	hrs	Client Info		<b>1907</b>	1512	1335
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>18</b>	17	4
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	0
Nickel	ppm	ASTM D5185m	>5	<b>5</b>	3	1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	7	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>9</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	14	4
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.5</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	8.3	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	19.0	17.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>20</b>	7	4
Boron	ppm	ASTM D5185m	250	<b>4</b>	2	<1
Barium	ppm	ASTM D5185m	10	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	65	58
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>941</b>	948	992
Calcium	ppm	ASTM D5185m	3000	<b>1132</b>	1031	1081
Phosphorus	ppm	ASTM D5185m	1150	<b>996</b>	1028	1047
Zinc	ppm	ASTM D5185m	1350	<b>1222</b>	1223	1263
Sulfur	ppm	ASTM D5185m	4250	<b>3157</b>	2928	3113
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.4</b>	15.0	13.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.8</b>	7.6	8.7
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.2	13.6


**FT-IR (Direct Trend)**

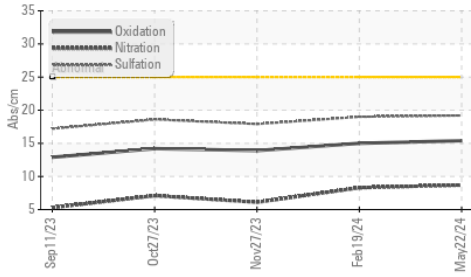


**Ferrous Alloys**

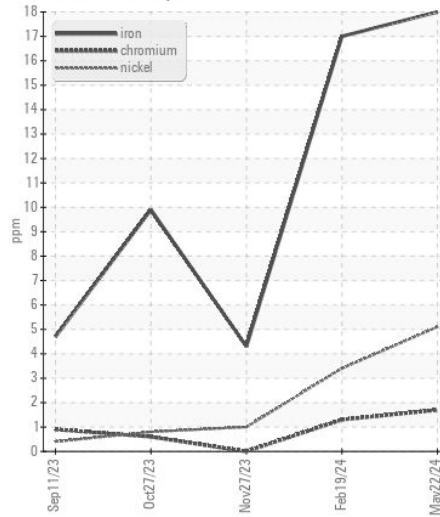


**Base Number**

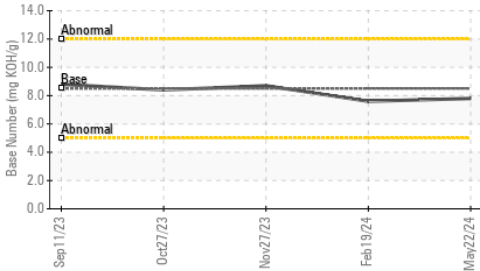


**Non-ferrous Metals**

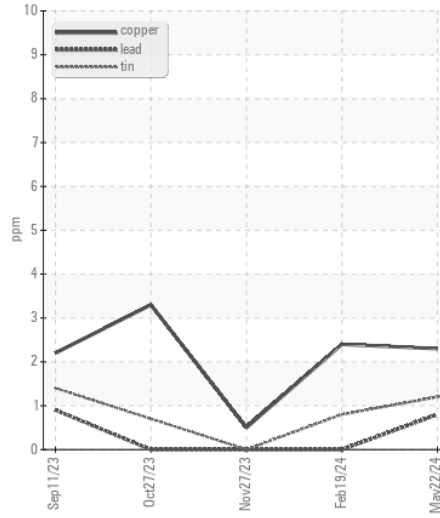


**Viscosity @ 100°C**

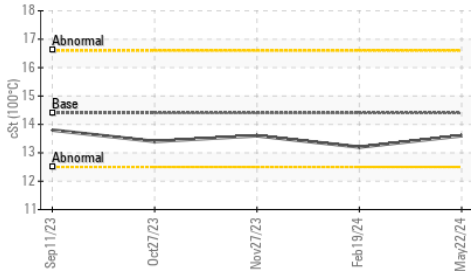


**Glycol Contamination**

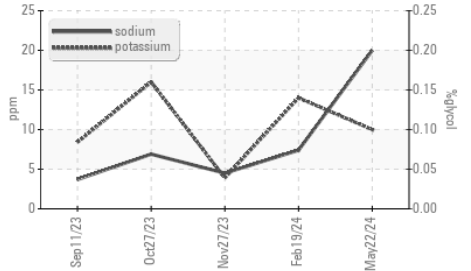

**Viscosity @ 100°C**

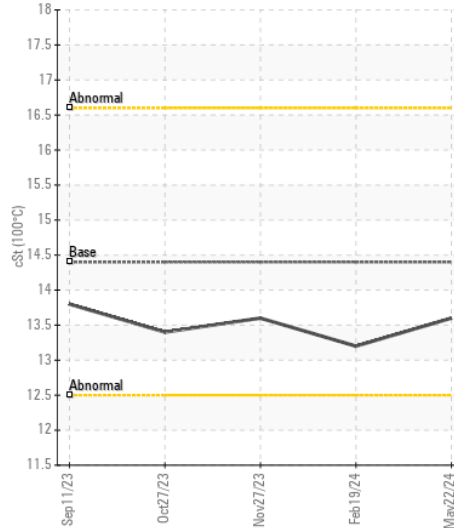

**Base Number**

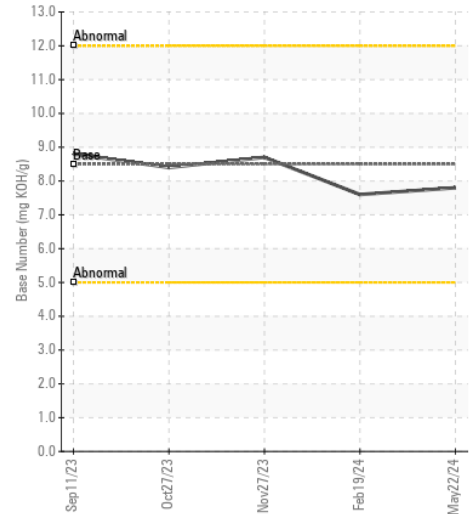

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116073  
**Lab Number** : 06191874  
**Unique Number** : 11048626  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: