



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CUMMINS 8464977
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (46 QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0020407	RPL0017632	RPL0011357
Sample Date		Client Info		13 May 2024	01 Feb 2024	10 Aug 2023
Machine Age	mls	Client Info		34750	23945	10808
Oil Age	mls	Client Info		34750	23945	10808
Filter Age	mls	Client Info		0	23945	10808
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>90	94	69	54
Chromium	ppm	ASTM D5185m	>20	6	4	3
Nickel	ppm	ASTM D5185m	>2	1	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	2	<1	0
Aluminum	ppm	ASTM D5185m	>20	11	7	7
Lead	ppm	ASTM D5185m	>40	10	6	4
Copper	ppm	ASTM D5185m	>330	29	26	30
Tin	ppm	ASTM D5185m	>15	4	3	2
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	35	35	46
Potassium	ppm	ASTM D5185m	>20	34	31	23
Fuel	%	ASTM D3524	>3.0	1.9	▲ 2.7	▲ 2.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.5	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	13.3	12.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.9	27.0	23.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	0	6
Boron	ppm	ASTM D5185m	0	19	19	41
Barium	ppm	ASTM D5185m	0	4	3	0
Molybdenum	ppm	ASTM D5185m	0	32	22	14
Manganese	ppm	ASTM D5185m		6	5	6
Magnesium	ppm	ASTM D5185m	0	819	691	771
Calcium	ppm	ASTM D5185m		1370	1173	1430
Phosphorus	ppm	ASTM D5185m		780	740	725
Zinc	ppm	ASTM D5185m		997	819	844
Sulfur	ppm	ASTM D5185m		2594	2489	3237
Oxidation	Abs/.1mm	*ASTM D7414	>25	31.5	28.9	23.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	4.4	4.3	5.3
Visc @ 100°C	cSt	ASTM D445	14	12.2	● 11.8	▲ 11.0

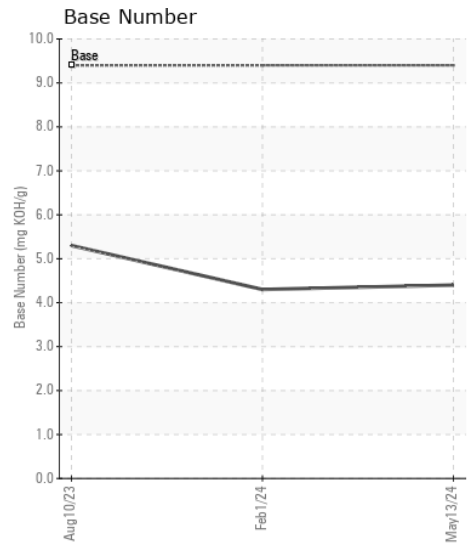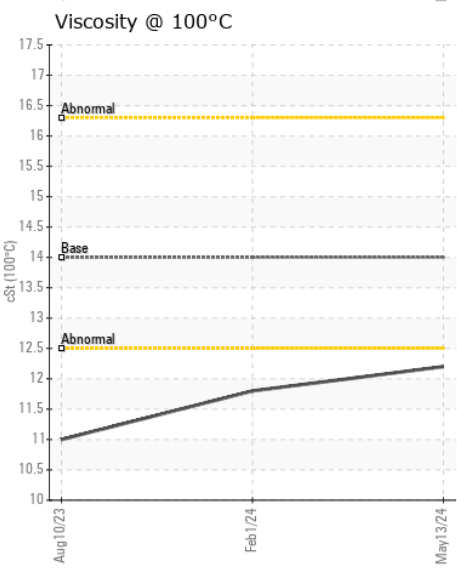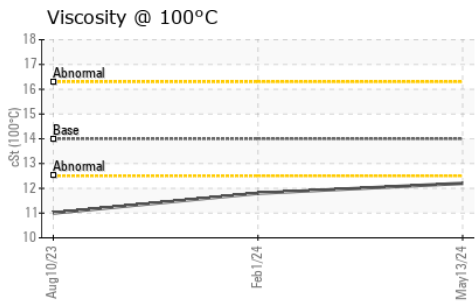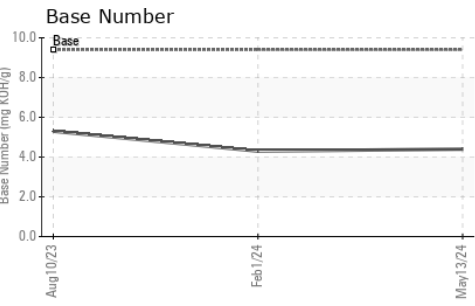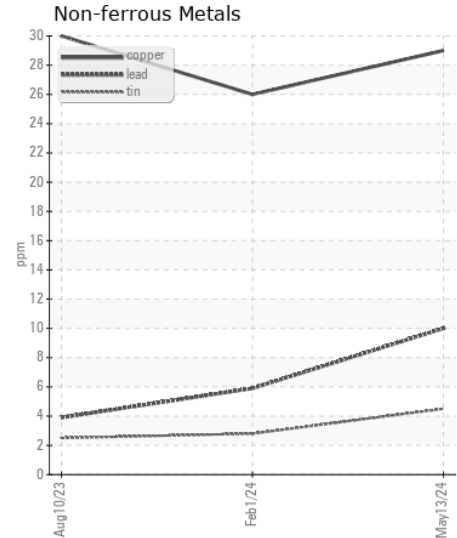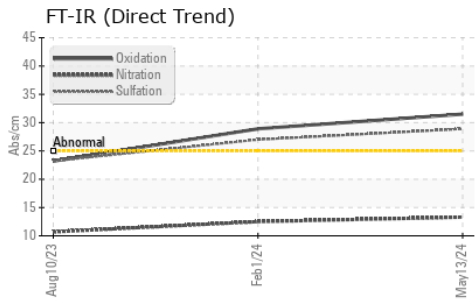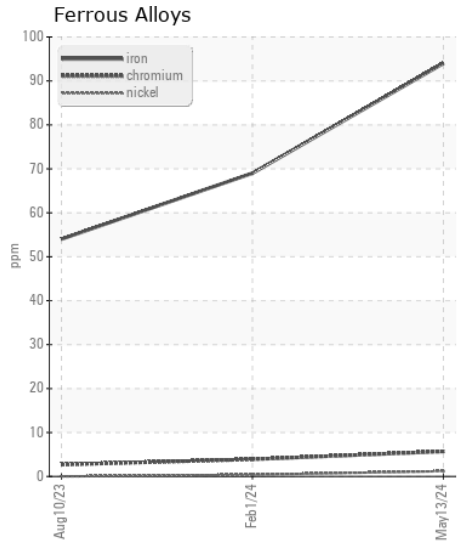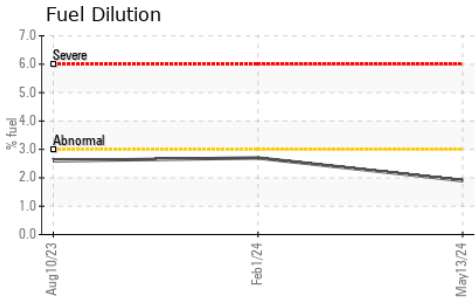

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0020407
Lab Number : 06191912
Unique Number : 11048664
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: