



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 8464221
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0020396	RPL0017553	RPL0015808
Sample Date		Client Info		15 May 2024	23 Jan 2024	18 Oct 2023
Machine Age	mls	Client Info		188908	183532	180011
Oil Age	mls	Client Info		8913	3537	13272
Filter Age	mls	Client Info		8913	3537	13272
Oil Changed		Client Info		Not Changd	Filtered	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	8	5	7
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	1	0	<1
Aluminum	ppm	ASTM D5185m	>25	4	<1	2
Lead	ppm	ASTM D5185m	>45	<1	<1	0
Copper	ppm	ASTM D5185m	>85	3	2	4
Tin	ppm	ASTM D5185m	>4	1	<1	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	8	7	9
Potassium	ppm	ASTM D5185m	>20	5	3	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.2	6.3	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	19.4	21.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	4
Boron	ppm	ASTM D5185m	0	3	3	8
Barium	ppm	ASTM D5185m	0	<1	0	20
Molybdenum	ppm	ASTM D5185m	0	63	61	60
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	988	984	839
Calcium	ppm	ASTM D5185m		1126	1043	1036
Phosphorus	ppm	ASTM D5185m		1054	1031	935
Zinc	ppm	ASTM D5185m		1270	1266	1120
Sulfur	ppm	ASTM D5185m		3349	3359	3574
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	14.8	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.3	9.2	6.9
Visc @ 100°C	cSt	ASTM D445	14	13.5	13.3	13.9


FT-IR (Direct Trend)

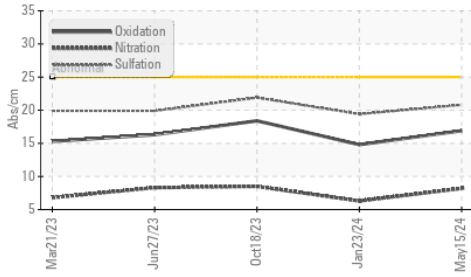


Ferrous Alloys

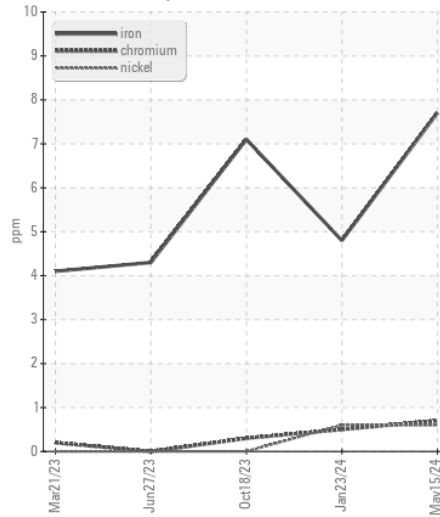


Base Number

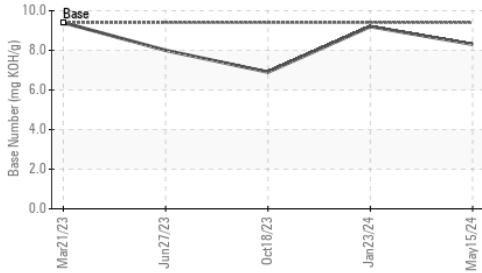


Non-ferrous Metals

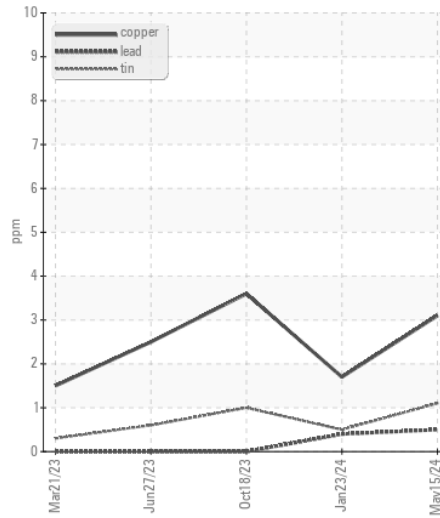


Viscosity @ 100°C

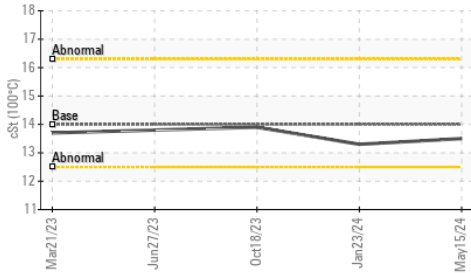

Viscosity @ 100°C

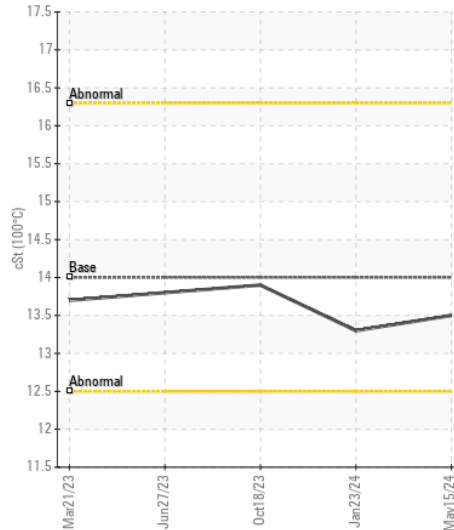

Base Number

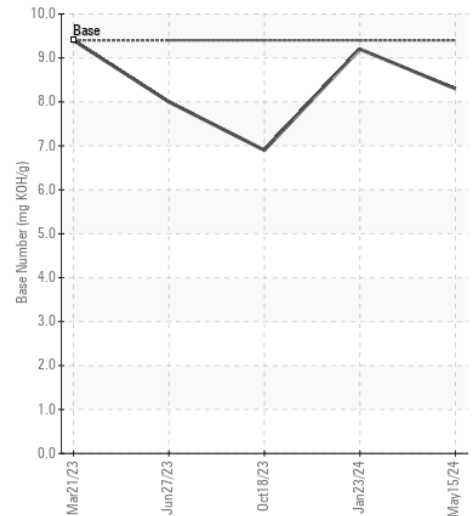

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0020396

Lab Number : 06191917

Unique Number : 11048669

Test Package : FLEET

Received : 28 May 2024

Tested : 29 May 2024

Diagnosed : 30 May 2024 - Sean Felton

RTL PACLEASE - 7035 - Sylmar

12985 West Foothill Boulevard

Sylmar, CA

US 91342

Contact: Rudy Trevizo

TrevizoR@RushEnterprises.Com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)