



Machine Id
JOHN DEERE 824K C262602 (S/N 1dw824kxpcd643255)

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (50 QTS)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213799	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		11014	---	---
Oil Age	hrs	Client Info		11014	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				SEVERE	---	---

WEAR

Cylinder, crank, or cam shaft wear is indicated. Bearing and/or bushing wear is indicated.

Iron	ppm	ASTM D5185m	>51	▲ 172	---	---
Chromium	ppm	ASTM D5185m	>11	6	---	---
Nickel	ppm	ASTM D5185m	>5	4	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m	>3	1	---	---
Aluminum	ppm	ASTM D5185m	>31	● 19	---	---
Lead	ppm	ASTM D5185m	>26	▲ 38	---	---
Copper	ppm	ASTM D5185m	>26	▲ 53	---	---
Tin	ppm	ASTM D5185m	>4	▲ 10	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is an abnormal amount of solids and carbon present in the oil.

Silicon	ppm	ASTM D5185m	>22	▲ 34	---	---
Potassium	ppm	ASTM D5185m	>20	▲ 2421	---	---
Fuel	%	ASTM D3524	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol	%	*ASTM D2982		▲ 0.20	---	---
Soot %	%	*ASTM D7844	>3	▲ 3.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	17.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	32.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>31	▲ 306	---	---
Boron	ppm	ASTM D5185m		44	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		76	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		525	---	---
Calcium	ppm	ASTM D5185m		1381	---	---
Phosphorus	ppm	ASTM D5185m		899	---	---
Zinc	ppm	ASTM D5185m		1091	---	---
Sulfur	ppm	ASTM D5185m		2962	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.0	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	---	---

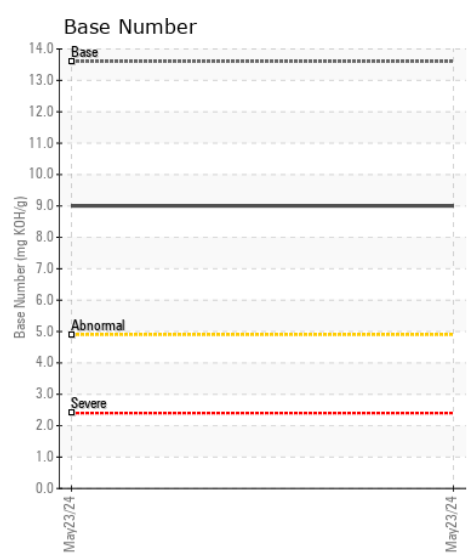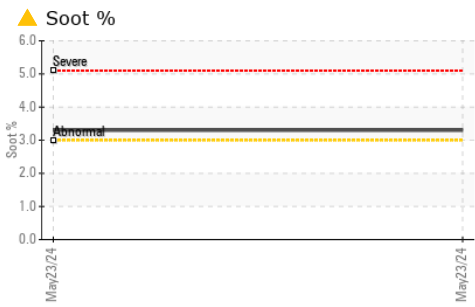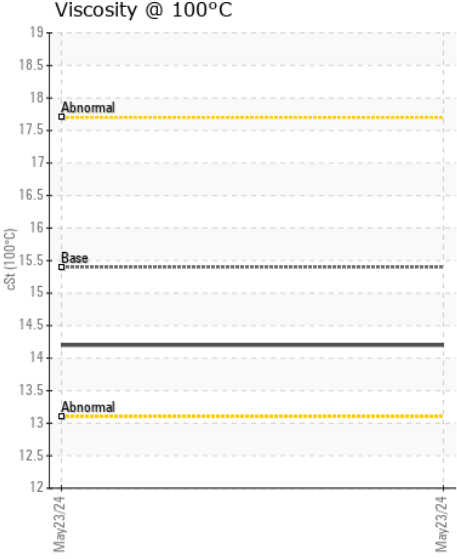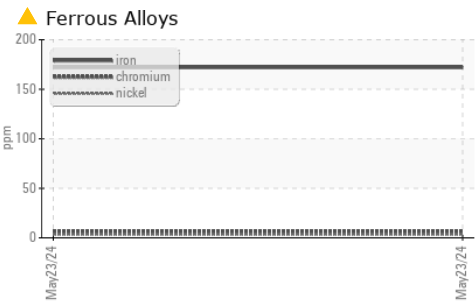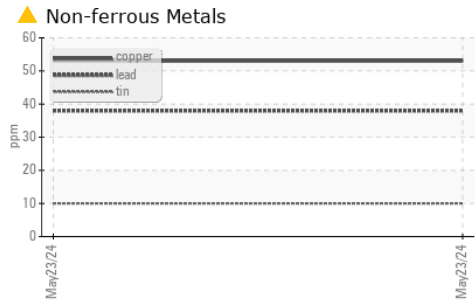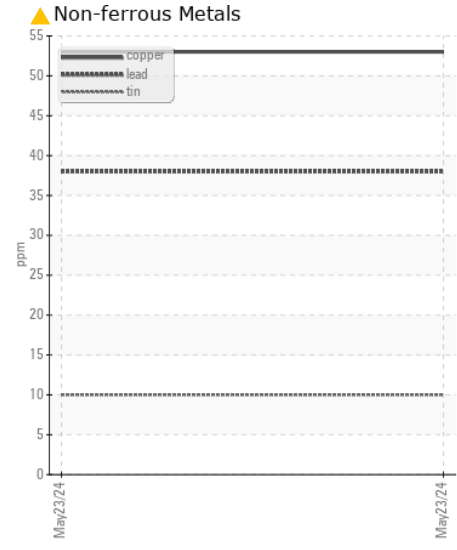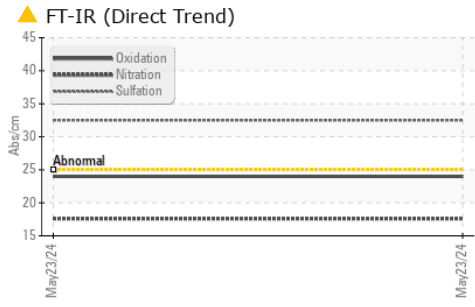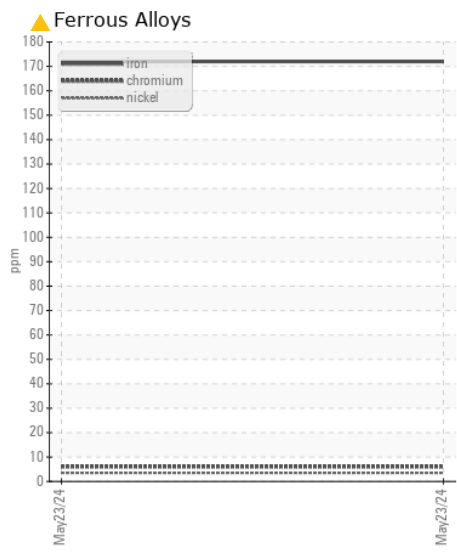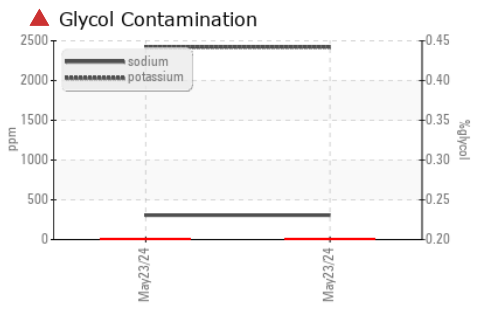

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213799 **Received** : 28 May 2024
Lab Number : 06191966 **Tested** : 30 May 2024
Unique Number : 11048718 **Diagnosed** : 30 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

JRE - GREENVILLE
 3604 HIGHWAY 264 E
 GREENVILLE, NC
 US 27834-5800
 Contact: GREENVILLE SHOP
 christopher.martin@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)