



**James River  
Equipment**

**OIL ANALYSIS REPORT**

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 450J 1T0450JXTDD255028**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0207751</b>	JR0191457	JR0157148
Sample Date		Client Info		<b>20 May 2024</b>	15 Nov 2023	08 Feb 2023
Machine Age	hrs	Client Info		<b>7148</b>	6934	6626
Oil Age	hrs	Client Info		<b>214</b>	308	233
Filter Age	hrs	Client Info		<b>214</b>	308	233
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>16</b>	29	13
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>6</b>	7	3
Lead	ppm	ASTM D5185m	>26	<b>3</b>	3	4
Copper	ppm	ASTM D5185m	>26	<b>2</b>	2	3
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>9</b>	7	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	0
Fuel	%	ASTM D3524	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	1.5	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	8.4	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	22.3	20.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>2</b>	1	1
Boron	ppm	ASTM D5185m		<b>244</b>	244	275
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>219</b>	248	258
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>726</b>	853	789
Calcium	ppm	ASTM D5185m		<b>1420</b>	1455	1519
Phosphorus	ppm	ASTM D5185m		<b>847</b>	880	867
Zinc	ppm	ASTM D5185m		<b>1003</b>	1097	1078
Sulfur	ppm	ASTM D5185m		<b>2911</b>	2955	3473
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.5</b>	14.9	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>9.4</b>	8.6	9.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.9</b>	14.6	14.4


**FT-IR (Direct Trend)**

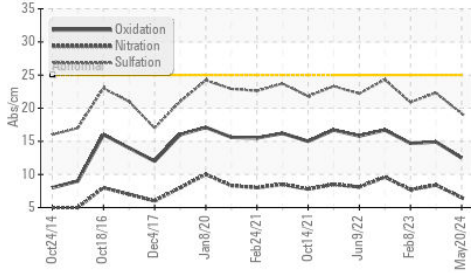


**Ferrous Alloys**

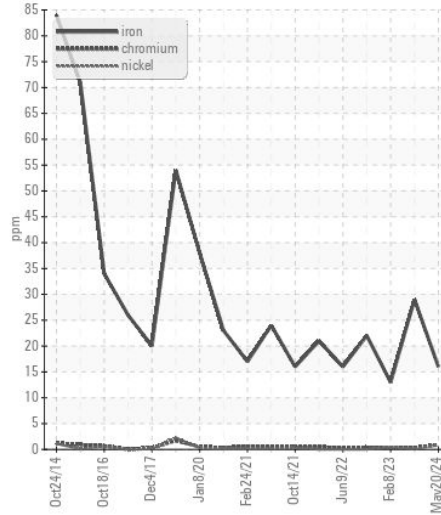

**Base Number**

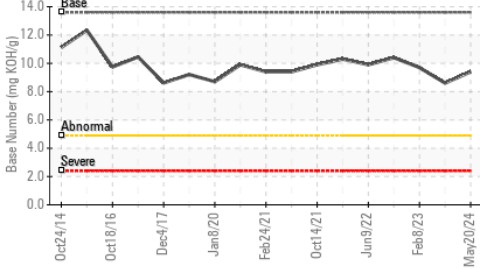


**Non-ferrous Metals**

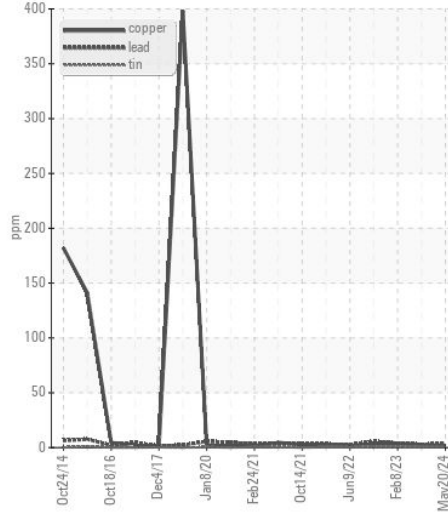


**Fuel Dilution**




**Viscosity @ 100°C**

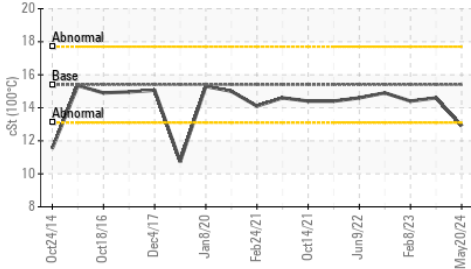

**Viscosity @ 100°C**

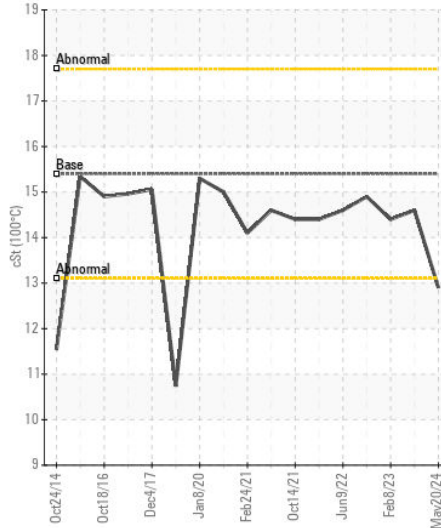

**Base Number**

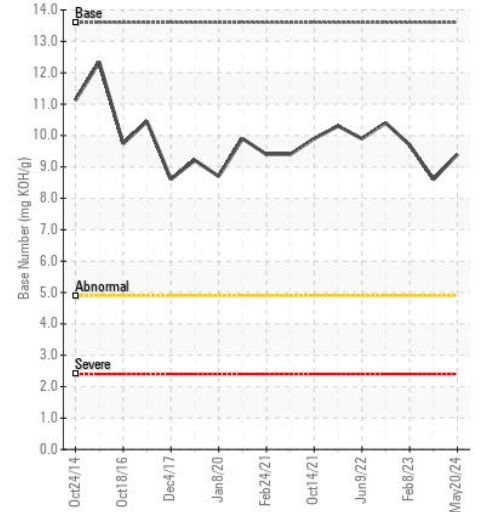

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0207751 **Received** : 28 May 2024  
**Lab Number** : 06191984 **Tested** : 29 May 2024  
**Unique Number** : 11048736 **Diagnosed** : 30 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**TENNOCA CONSTRUCTION**

PO BOX 2379  
 CANDLER, NC  
 US 28715  
 Contact: MARK ROSS  
 mark@tennoca.com

T: (828)665-8331

F: