



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W51962 HENDERSON]
 Machine Id
JOHN DEERE 350P 1FF350PAVNF000390
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211611	JR0164458	---
Sample Date		Client Info		23 May 2024	19 May 2023	---
Machine Age	hrs	Client Info		968	470	---
Oil Age	hrs	Client Info		0	470	---
Filter Age	hrs	Client Info		0	470	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	13	---
Iron	ppm	ASTM D5185m	>32	2	4	---
Chromium	ppm	ASTM D5185m	>9	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>9	0	0	---
Lead	ppm	ASTM D5185m	>28	0	<1	---
Copper	ppm	ASTM D5185m	>50	1	3	---
Tin	ppm	ASTM D5185m	>5	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	<1	3	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	6044	2831	---
Particles >6µm		ASTM D7647	>20000	283	612	---
Particles >14µm		ASTM D7647	>640	16	49	---
Particles >21µm		ASTM D7647	>160	5	12	---
Particles >38µm		ASTM D7647	>40	0	2	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/15/11	19/16/13	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		0	4	---
Calcium	ppm	ASTM D5185m		2	9	---
Phosphorus	ppm	ASTM D5185m	827	559	548	---
Zinc	ppm	ASTM D5185m	0	21	37	---
Sulfur	ppm	ASTM D5185m	13	32	0	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.16	0.12	---
Visc @ 40°C	cSt	ASTM D445	47	46.2	46.1	---

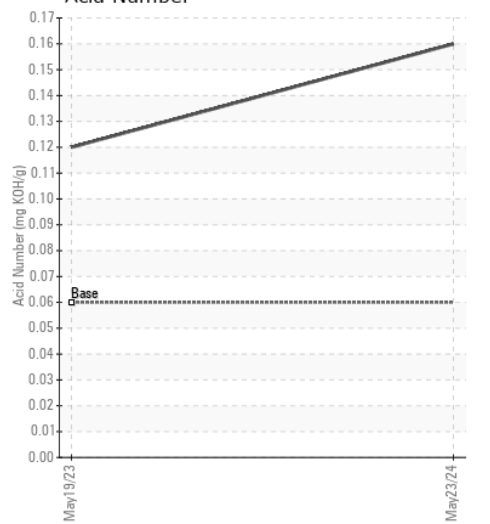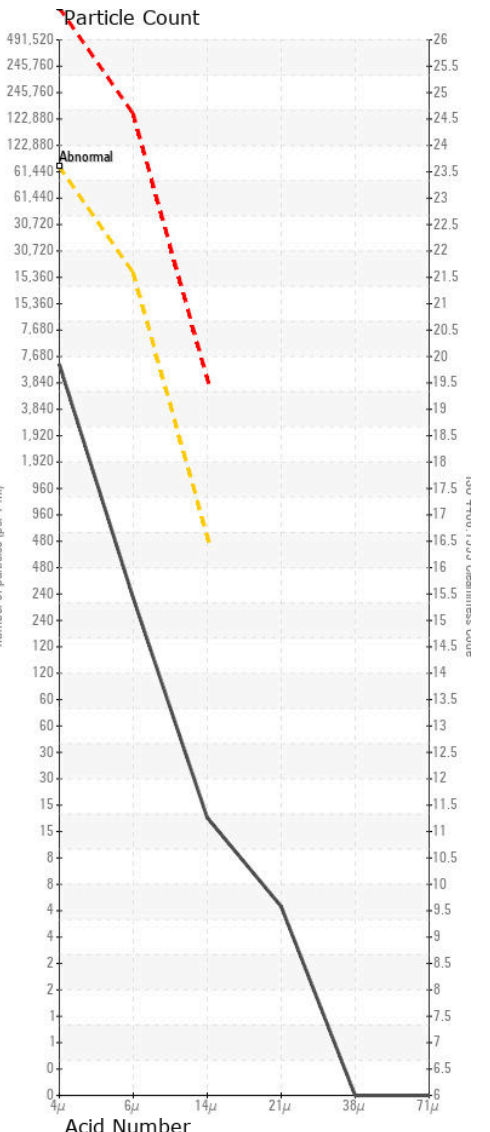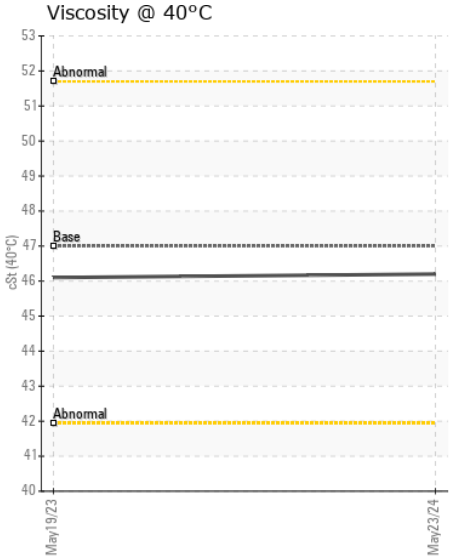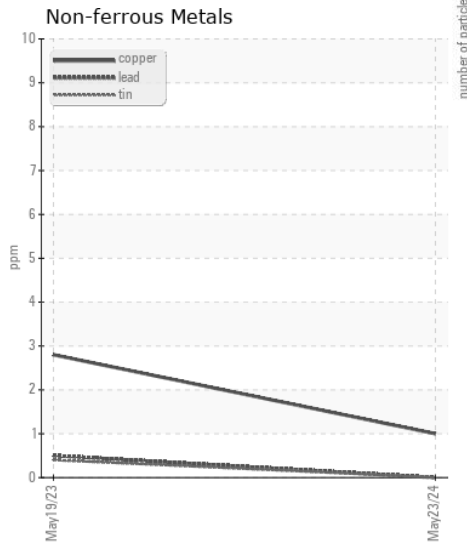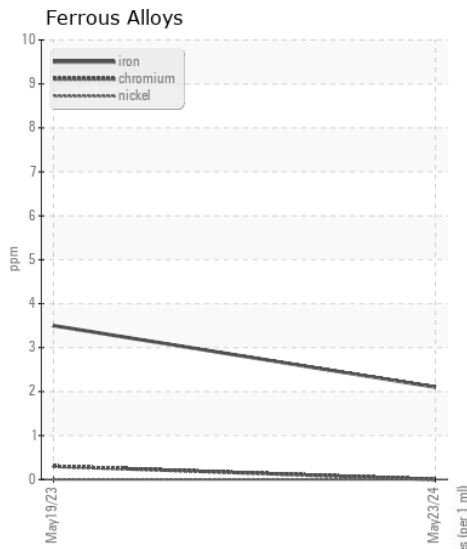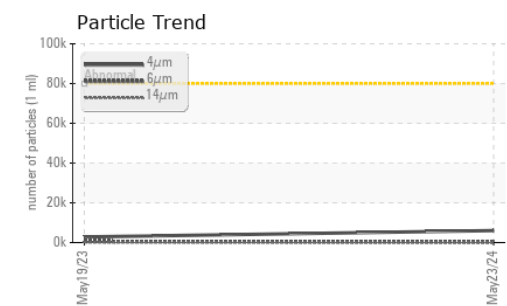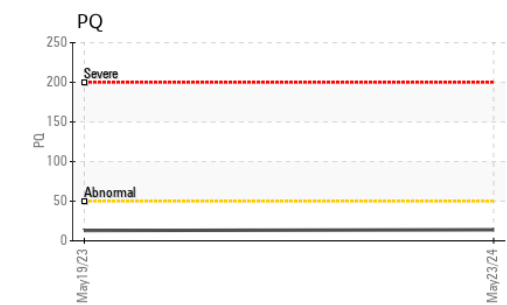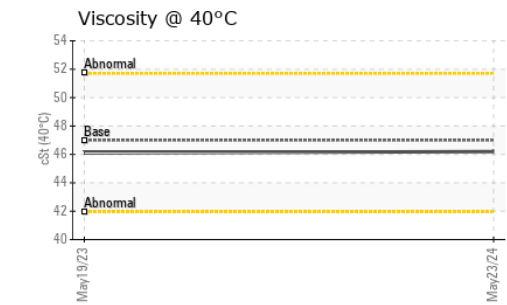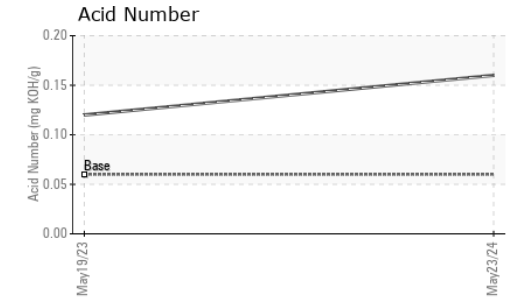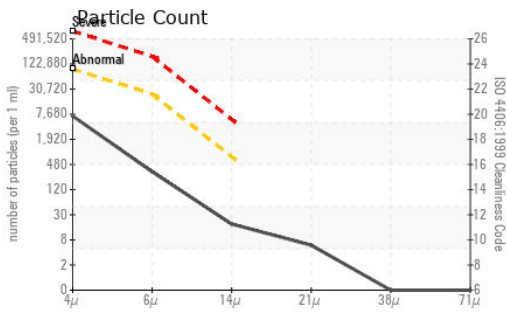

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211611 **Received** : 28 May 2024
Lab Number : 06192091 **Tested** : 29 May 2024
Unique Number : 11048843 **Diagnosed** : 30 May 2024 - Angela Borella
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292