



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**HIAB 1 - BALAMO BUILDING SUPPLY**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0927169	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		0	---	---
Filter Age	yrs	Client Info		2	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION











There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	5603	---	---
Particles >6µm		ASTM D7647	>1300	470	---	---
Particles >14µm		ASTM D7647	>160	8	---	---
Particles >21µm		ASTM D7647	>40	1	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/16/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	<1	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	9	---	---
Calcium	ppm	ASTM D5185m	200	64	---	---
Phosphorus	ppm	ASTM D5185m	300	258	---	---
Zinc	ppm	ASTM D5185m	370	286	---	---
Sulfur	ppm	ASTM D5185m	2500	2126	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.33	---	---
Visc @ 40°C	cSt	ASTM D445	46	46.5	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	7.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	122	---	---

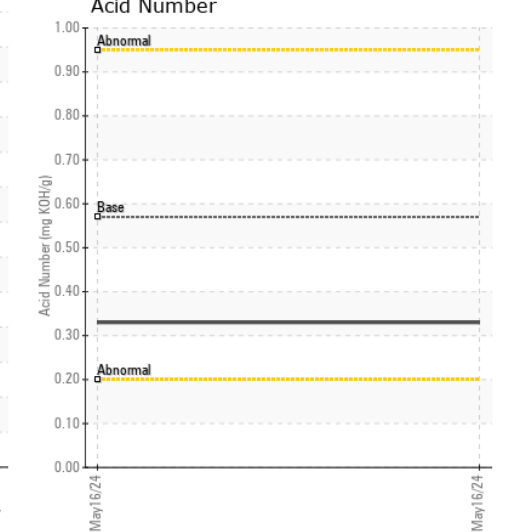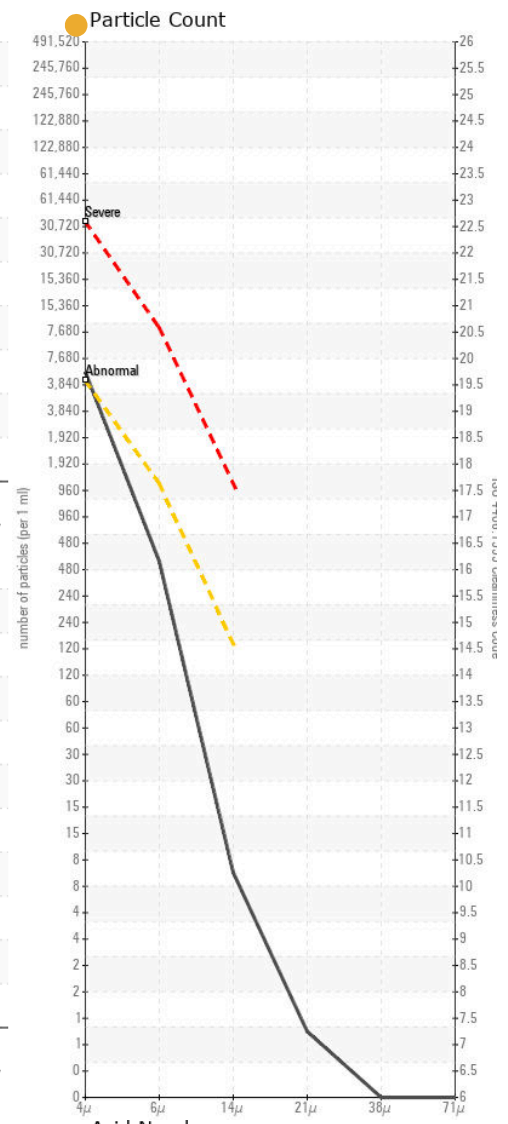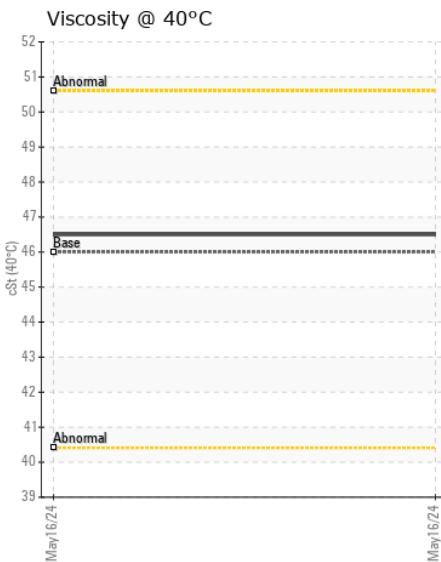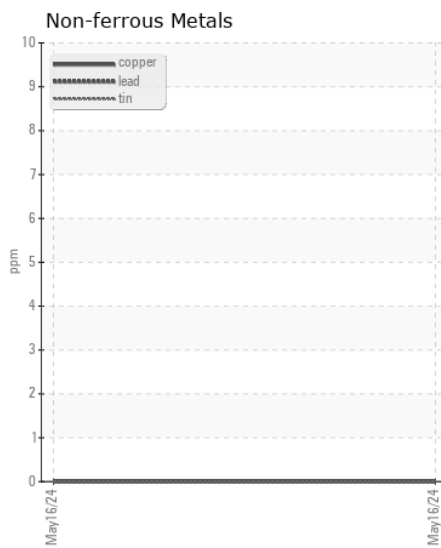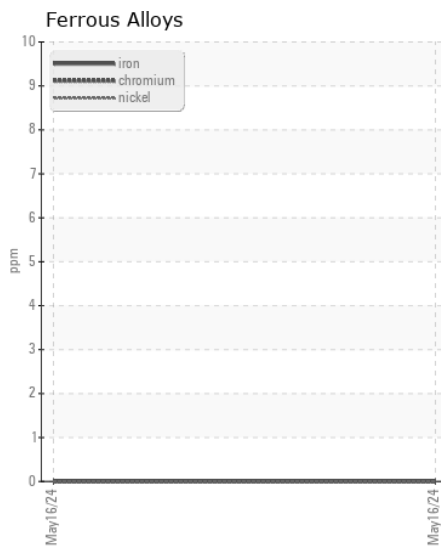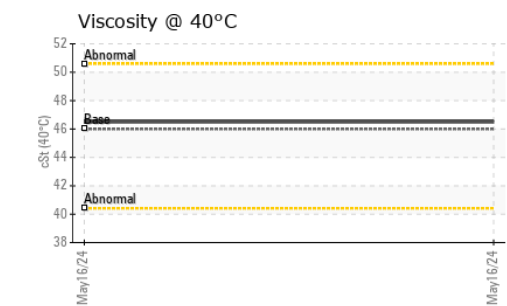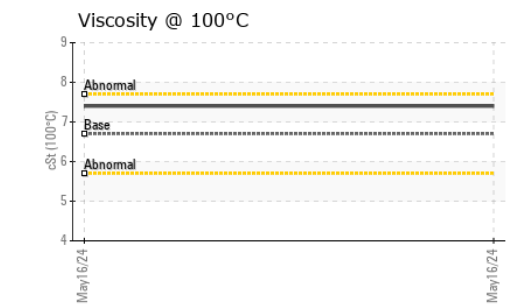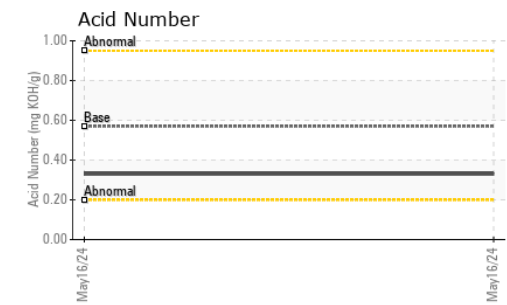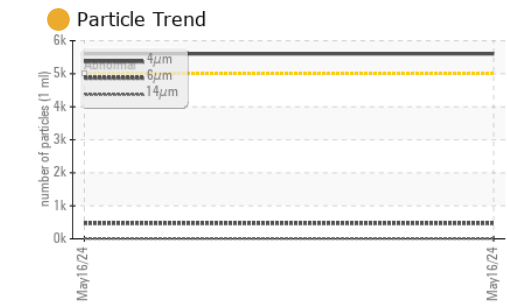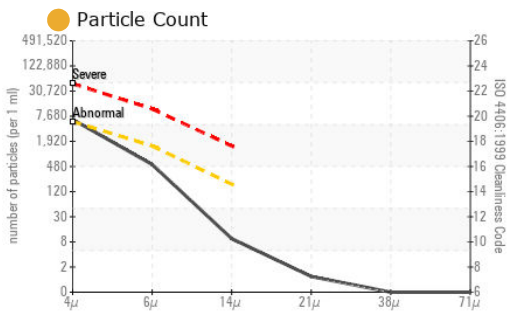

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0927169 **Received** : 28 May 2024  
**Lab Number** : 06192184 **Tested** : 29 May 2024  
**Unique Number** : 11048936 **Diagnosed** : 29 May 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**HIAB USA - SOUTH**  
 8960 HWY 5 BLDG A  
 DOUGLASVILLE, GA  
 US 30135  
 Contact: CHARLES FOERSTER  
 charles.foerster@hiab.com  
 T: (404)787-0966  
 F: (770)949-7552

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)