



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Machine Id
HIAB 221217 - SUBURBAN PROPANE
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0927177	---	---
Sample Date		Client Info		29 Apr 2024	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		3	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 22773	---	---
Particles >6µm		ASTM D7647	>1300	● 1941	---	---
Particles >14µm		ASTM D7647	>160	9	---	---
Particles >21µm		ASTM D7647	>40	2	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/18/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within ISO 32 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	8	---	---
Calcium	ppm	ASTM D5185m	200	51	---	---
Phosphorus	ppm	ASTM D5185m	300	302	---	---
Zinc	ppm	ASTM D5185m	370	373	---	---
Sulfur	ppm	ASTM D5185m	2500	832	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.39	---	---
Visc @ 40°C	cSt	ASTM D445	46	● 31.6	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	● 6.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	144	---	---

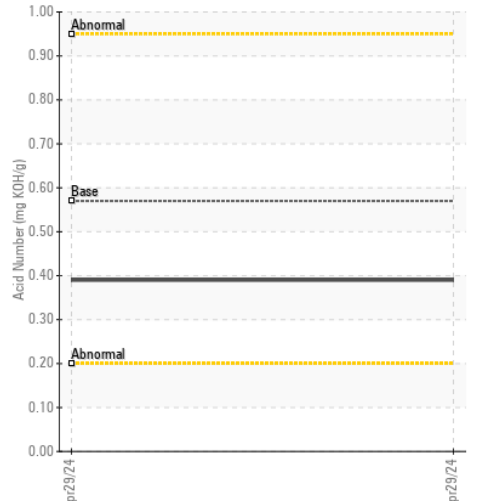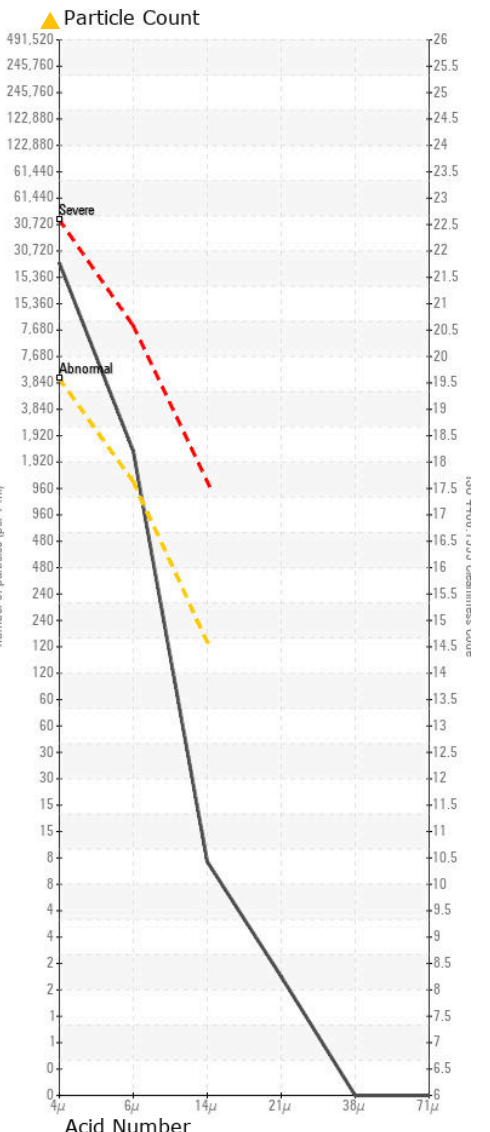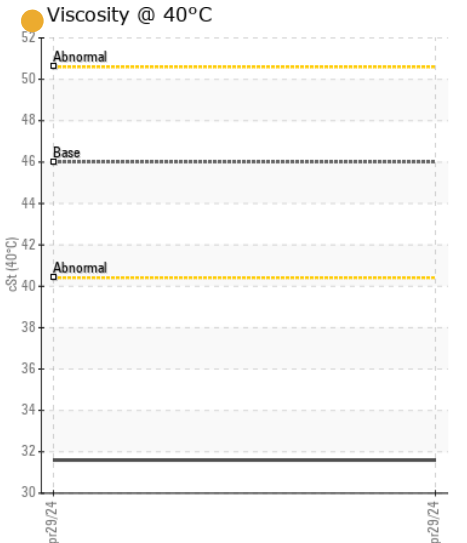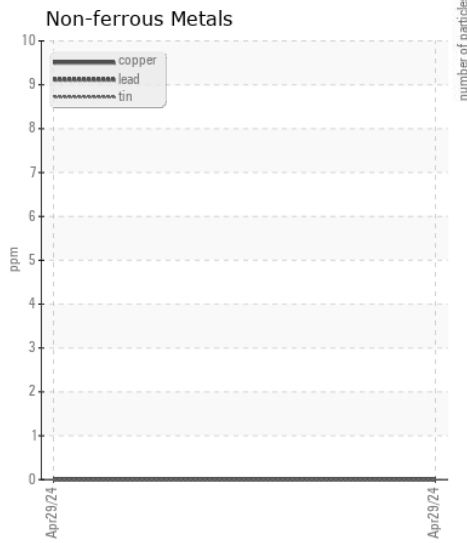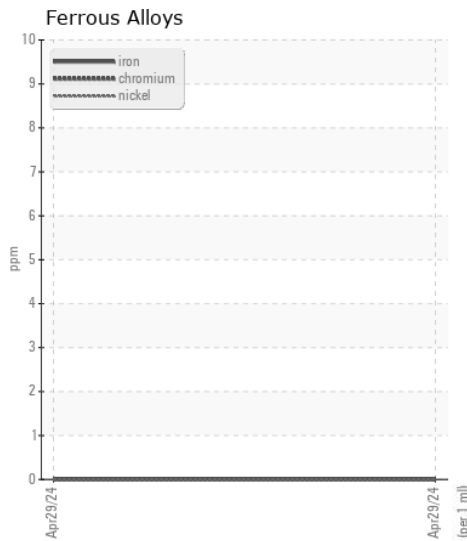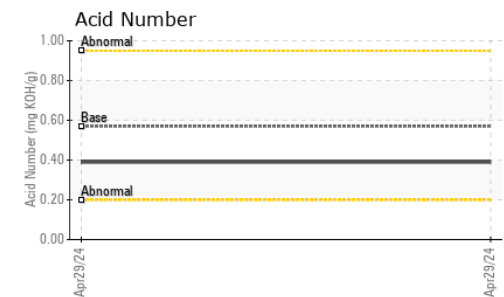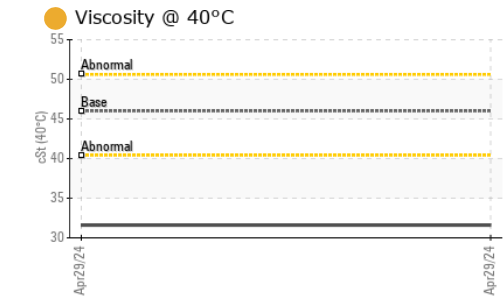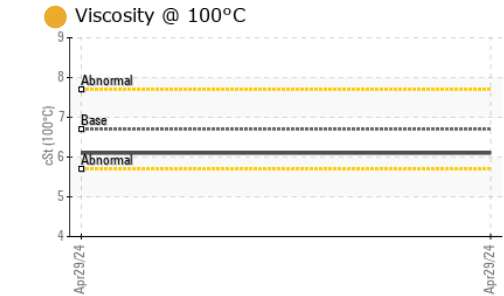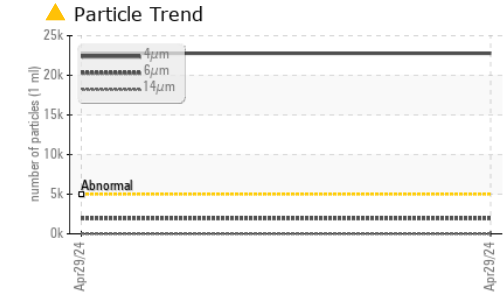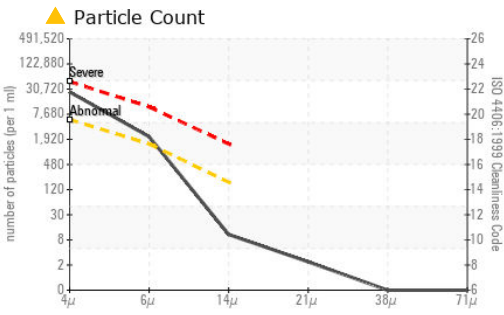

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0927177 **Received** : 28 May 2024
Lab Number : 06192188 **Tested** : 29 May 2024
Unique Number : 11048940 **Diagnosed** : 31 May 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - SOUTH
 8960 HWY 5 BLDG A
 DOUGLASVILLE, GA
 US 30135
 Contact: CHARLES FOERSTER
 charles.foerster@hiab.com
 T: (404)787-0966
 F: (770)949-7552

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)