



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HIAB 222280 - SUBURBAN PROPANE

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0664368	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	yrs	Client Info		3	---	---
Oil Age	yrs	Client Info		3	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	3090	---	---
Particles >6µm		ASTM D7647	>1300	345	---	---
Particles >14µm		ASTM D7647	>160	25	---	---
Particles >21µm		ASTM D7647	>40	6	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	1	---	---
Calcium	ppm	ASTM D5185m	200	82	---	---
Phosphorus	ppm	ASTM D5185m	300	383	---	---
Zinc	ppm	ASTM D5185m	370	472	---	---
Sulfur	ppm	ASTM D5185m	2500	1223	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.45	---	---
Visc @ 40°C	cSt	ASTM D445	46	46.6	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	7.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	129	---	---

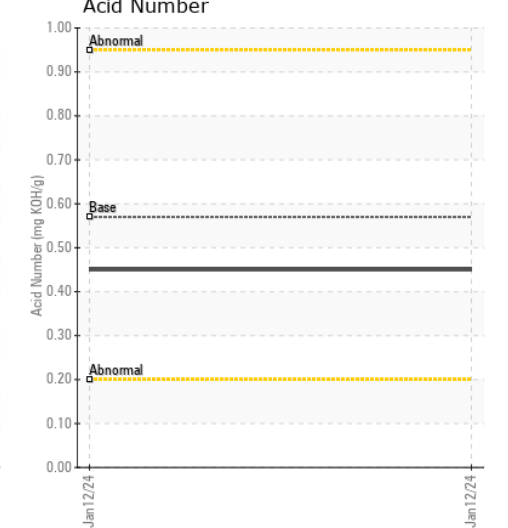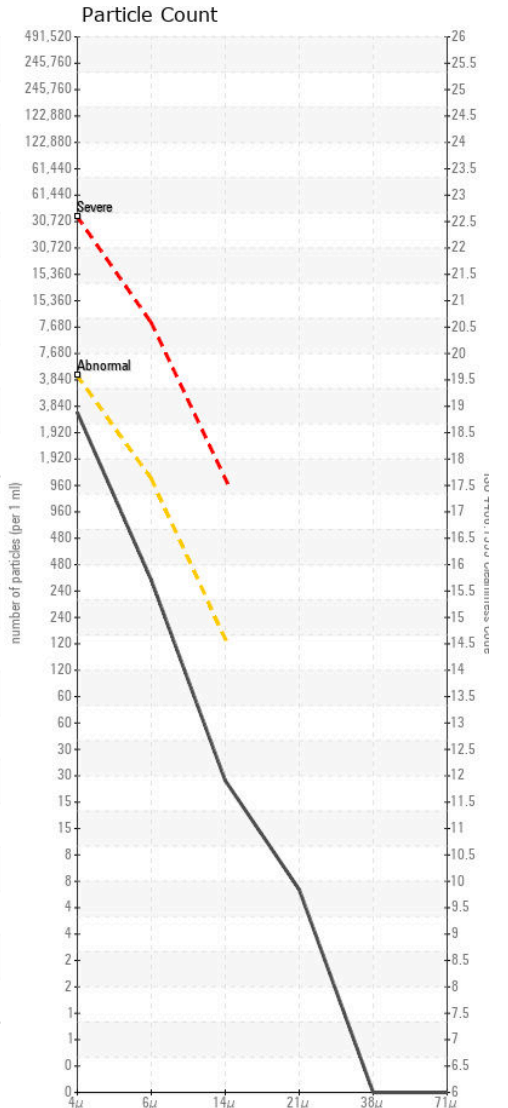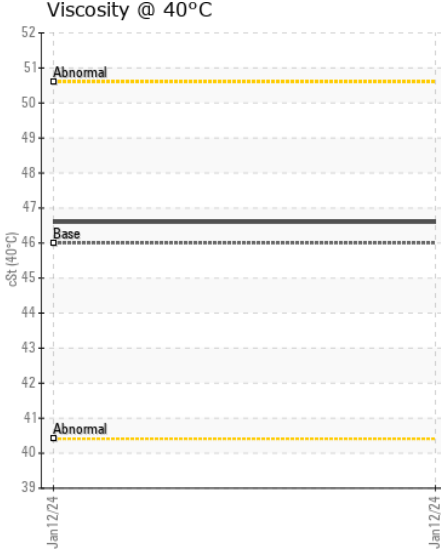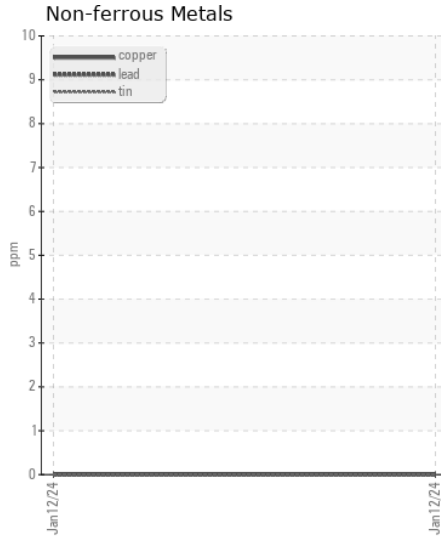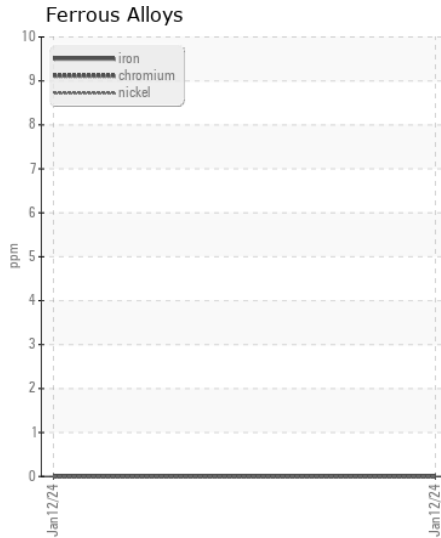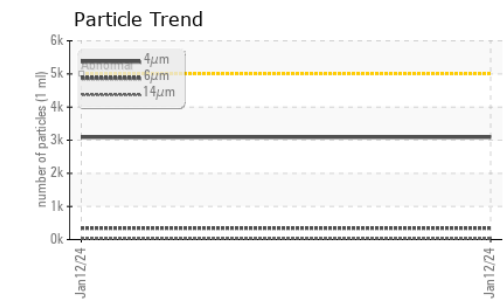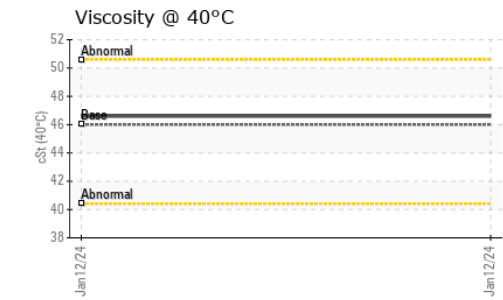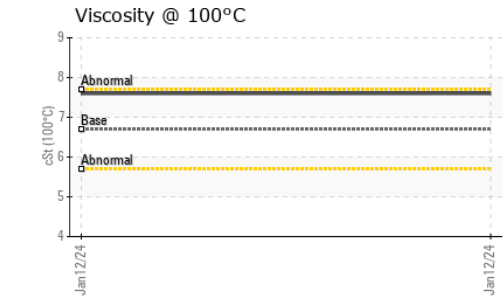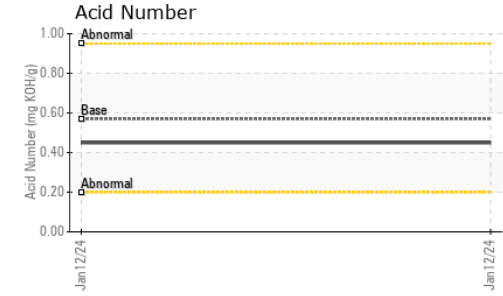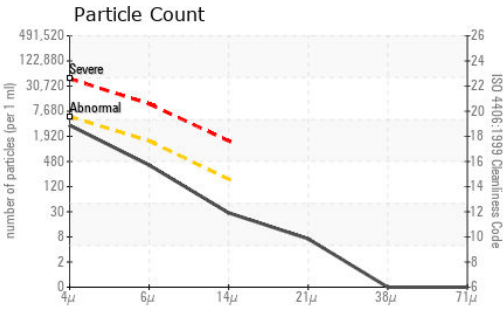

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0664368 **Received** : 28 May 2024
Lab Number : 06192198 **Tested** : 29 May 2024
Unique Number : 11048950 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - SOUTH
 8960 HWY 5 BLDG A
 DOUGLASVILLE, GA
 US 30135
 Contact: CHARLES FOERSTER
 charles.foerster@hiab.com
 T: (404)787-0966
 F: (770)949-7552

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)