



WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
SEVERE
NORMAL

Machine Id
JOHN DEERE 317G 1T0317GJPJJ342655
Component
Left Final Drive
Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

WEAR

The chromium level is abnormal. All other component wear rates are normal.









CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207752	JR0141522	JR0111741
Sample Date		Client Info		21 May 2024	28 Nov 2022	06 Apr 2022
Machine Age	hrs	Client Info		2893	1949	1513
Oil Age	hrs	Client Info		944	998	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	SEVERE	ABNORMAL
PQ		ASTM D8184	>1250	108	96	38
Iron	ppm	ASTM D5185m	>750	771	459	293
Chromium	ppm	ASTM D5185m	>9	40	▲ 27	▲ 39
Nickel	ppm	ASTM D5185m	>10	5	3	2
Titanium	ppm	ASTM D5185m		25	12	8
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>40	● 421	● 213	● 106
Lead	ppm	ASTM D5185m	>15	<1	<1	<1
Copper	ppm	ASTM D5185m	>40	4	3	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	▲ 880	▲ 437	▲ 291
Potassium	ppm	ASTM D5185m	>20	72	39	27
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>51	14	10	10
Boron	ppm	ASTM D5185m		<1	<1	1
Barium	ppm	ASTM D5185m		1	1	0
Molybdenum	ppm	ASTM D5185m		5	3	4
Manganese	ppm	ASTM D5185m		10	6	5
Magnesium	ppm	ASTM D5185m		33	30	16
Calcium	ppm	ASTM D5185m	87	121	138	125
Phosphorus	ppm	ASTM D5185m	727	581	530	590
Zinc	ppm	ASTM D5185m	900	796	804	729
Sulfur	ppm	ASTM D5185m	1500	3063	3132	2539
Visc @ 40°C	cSt	ASTM D445	65	60.9	58.4	58.1

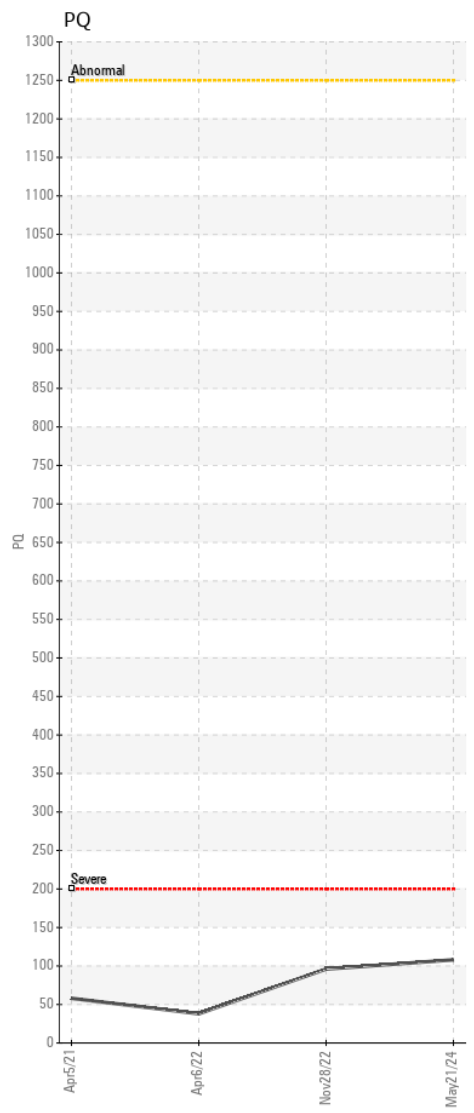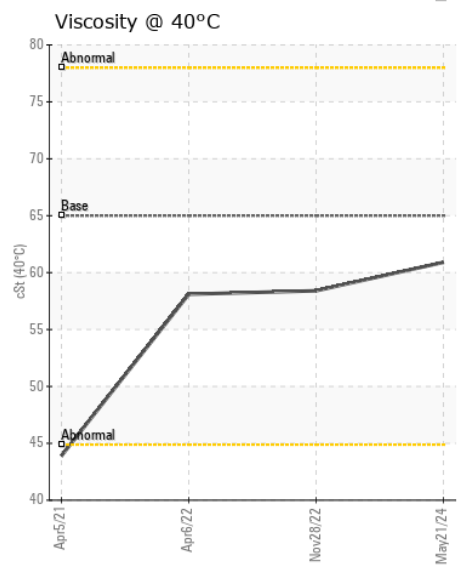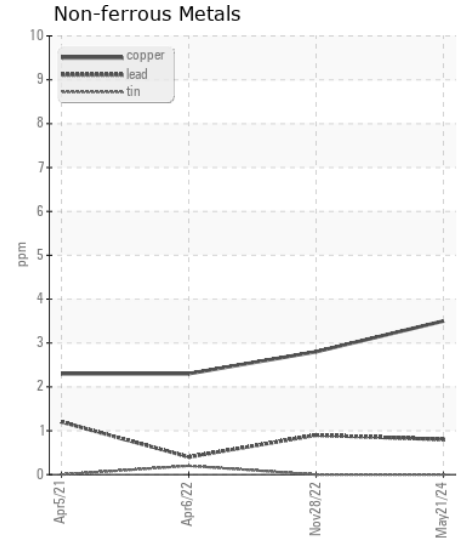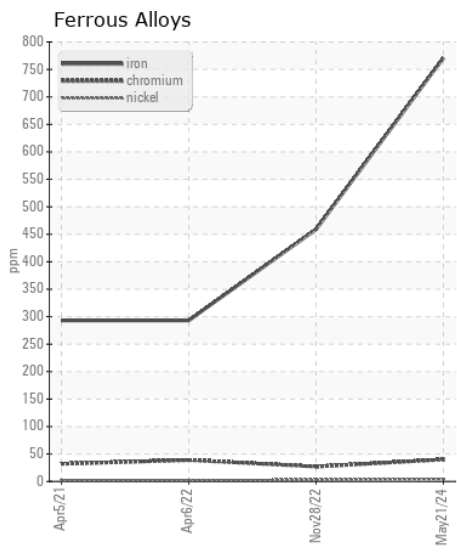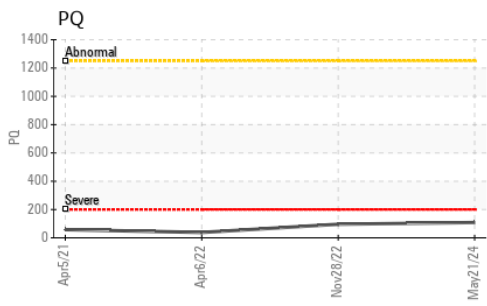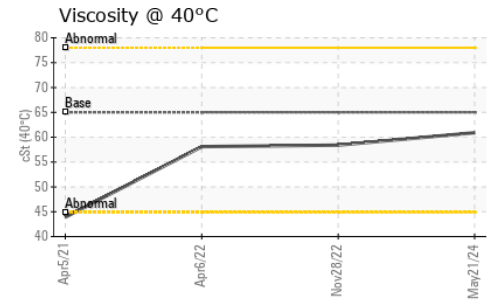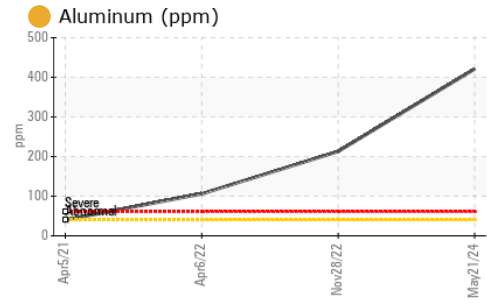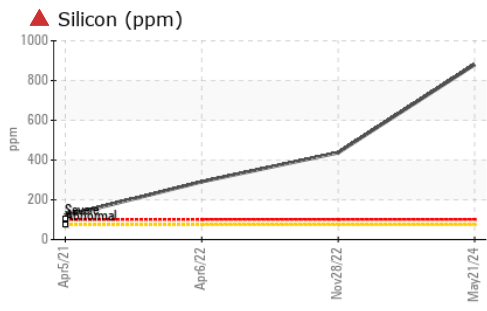

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207752 **Received** : 28 May 2024
Lab Number : 06192508 **Tested** : 30 May 2024
Unique Number : 11049260 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

TENNOCA CONSTRUCTION
 PO BOX 2379
 CANDLER, NC
 US 28715
 Contact: MARK ROSS
 mark@tennoca.com
 T: (828)665-8331
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)