



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 210G 1FF210GXKNF530401
 Component
Swing Drive Gear Case
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207832	JR0188730	---
Sample Date		Client Info		23 May 2024	15 Sep 2023	---
Machine Age	hrs	Client Info		1027	561	---
Oil Age	hrs	Client Info		1027	561	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		55	14	---
Iron	ppm	ASTM D5185m	>200	108	12	---
Chromium	ppm	ASTM D5185m	>10	3	0	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m		9	<1	---
Lead	ppm	ASTM D5185m		0	0	---
Copper	ppm	ASTM D5185m		1	0	---
Tin	ppm	ASTM D5185m		0	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m		32	3	---
Potassium	ppm	ASTM D5185m	>20	4	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		2	<1	---
Boron	ppm	ASTM D5185m		79	14	---
Barium	ppm	ASTM D5185m		5	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		3	<1	---
Magnesium	ppm	ASTM D5185m		2	0	---
Calcium	ppm	ASTM D5185m		23	1	---
Phosphorus	ppm	ASTM D5185m		538	386	---
Zinc	ppm	ASTM D5185m		24	0	---
Sulfur	ppm	ASTM D5185m		16810	21689	---
Visc @ 40°C	cSt	ASTM D445		187	143	---

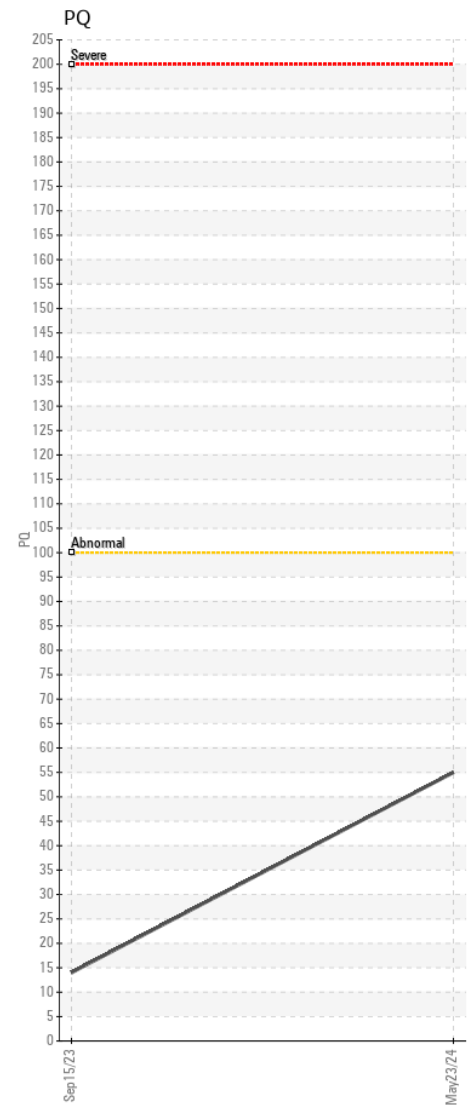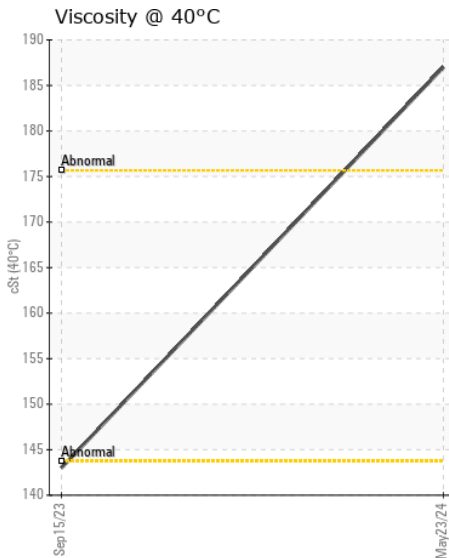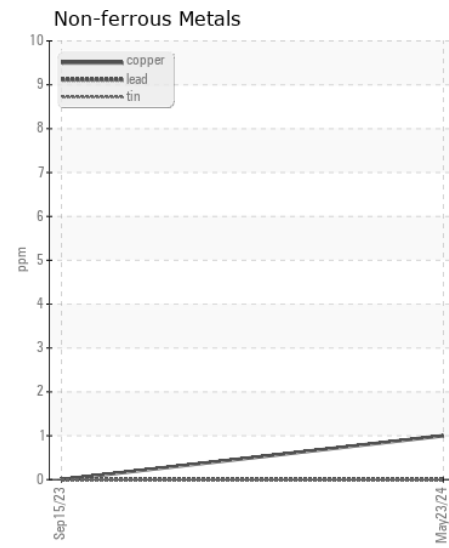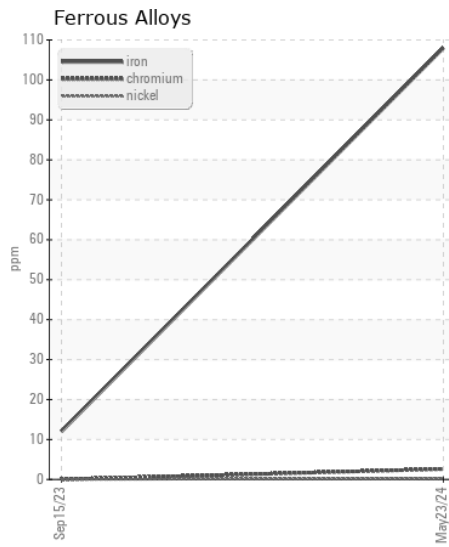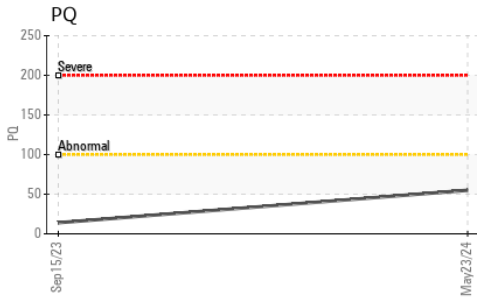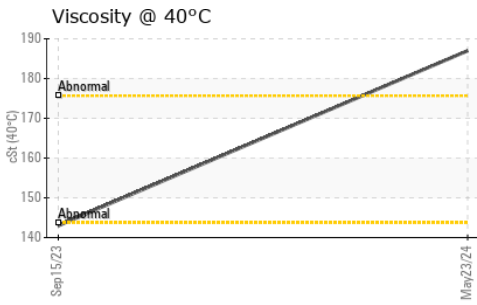

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207832 **Received** : 28 May 2024
Lab Number : 06192509 **Tested** : 30 May 2024
Unique Number : 11049261 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - ASHEVILLE
 101 BRUCE DRIVE
 ASHEVILLE, NC
 US 28806

Contact: Randy Warren
 randy.warren@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (528)667-0176
 F: (828)667-4865