



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area

[716570]

Machine Id

VOLVO L25H 1420334

Component

Rear Axle

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

### RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449898	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		1540	---	---
Oil Age	hrs	Client Info		1540	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	174	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>120	4	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	15	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		17	---	---
Boron	ppm	ASTM D5185m	379	122	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.8	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	11	---	---
Magnesium	ppm	ASTM D5185m	31	11	---	---
Calcium	ppm	ASTM D5185m	38	3486	---	---
Phosphorus	ppm	ASTM D5185m	1077	1199	---	---
Zinc	ppm	ASTM D5185m	46	1443	---	---
Sulfur	ppm	ASTM D5185m	23526	5004	---	---
Visc @ 40°C	cSt	ASTM D445	139	63.6	---	---

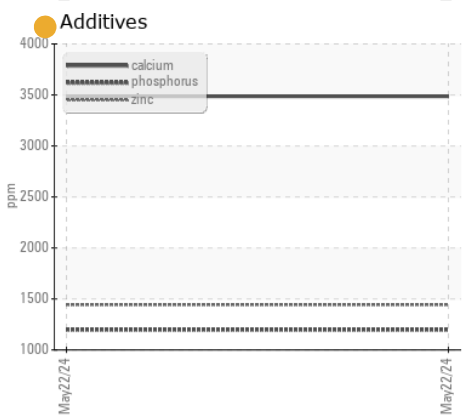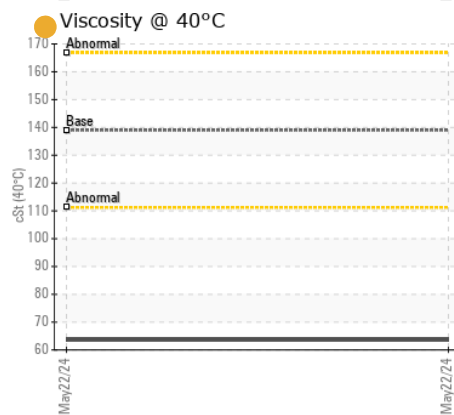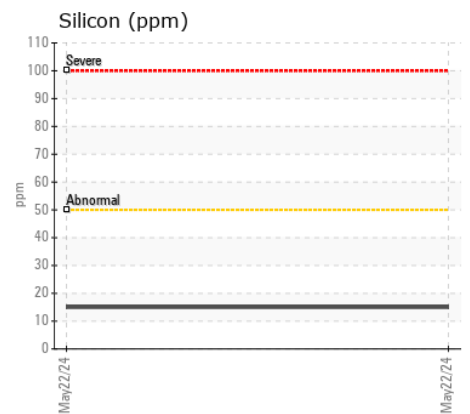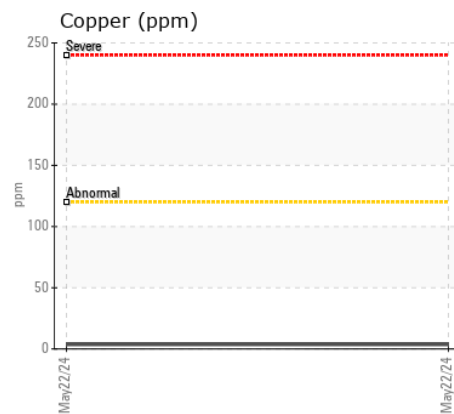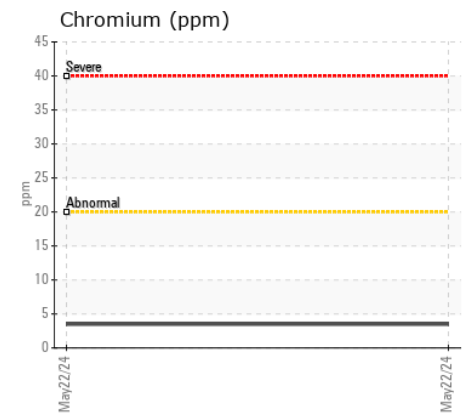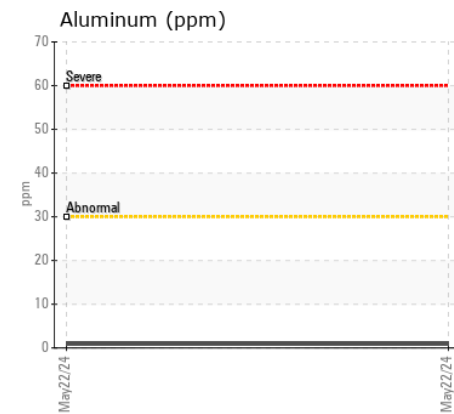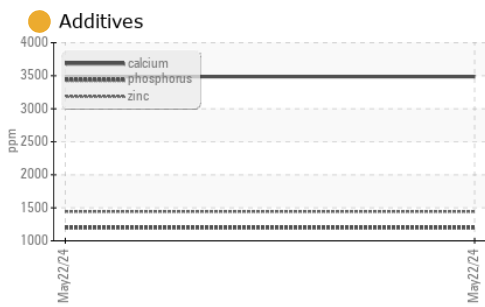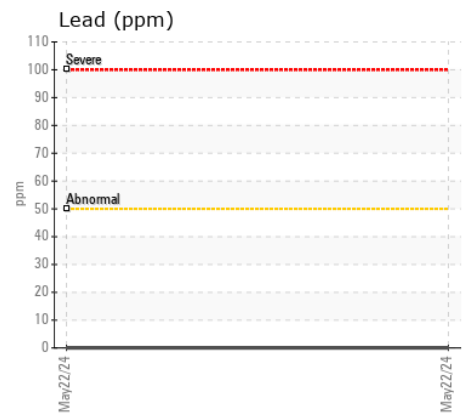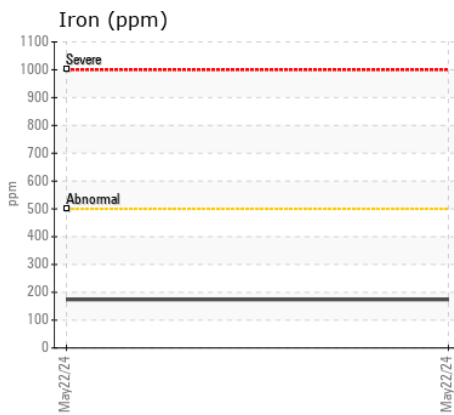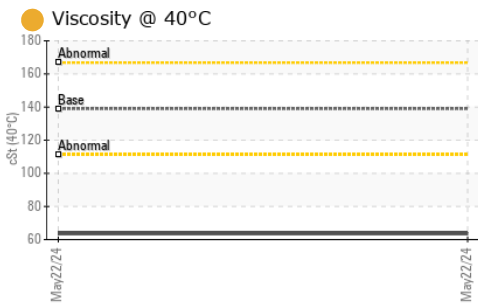

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP449898  
**Lab Number** : 06192546  
**Unique Number** : 11049298  
**Test Package** : MOB 1

**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Don Baldrige

**CADILLAC ASPHALT PAVING LLC**  
 2575 HAGGERTY ROAD  
 CANTON, MI  
 US 48188  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (734)394-0261

F: