



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area

**[717008 SOUTHLAND]**

Machine Id

**VOLVO A25G 742245**

Component

**Wet Disc Brake**

Fluid

**VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP450733</b>	---	---
Sample Date		Client Info		<b>22 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5245</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

The iron level is abnormal. The copper level is abnormal.

Iron	ppm	ASTM D5185m	>20	<b>▲ 33</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>▲ 182</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION












Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>15</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m		<b>38</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>6</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>25</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1890</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>774</b>	---	---
Zinc	ppm	ASTM D5185m		<b>926</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4747</b>	---	---
Visc @ 40°C	cSt	ASTM D445	55	<b>51.3</b>	---	---

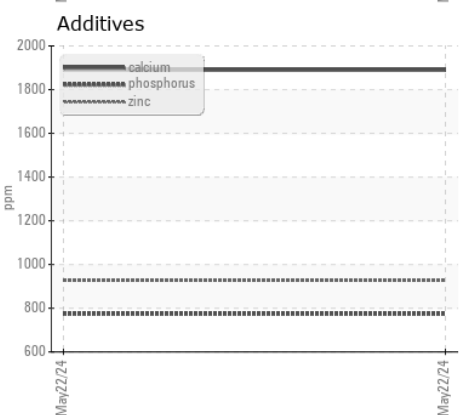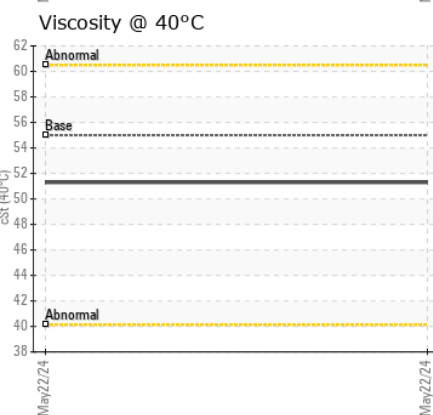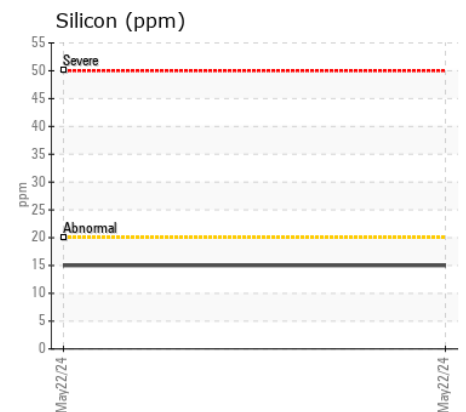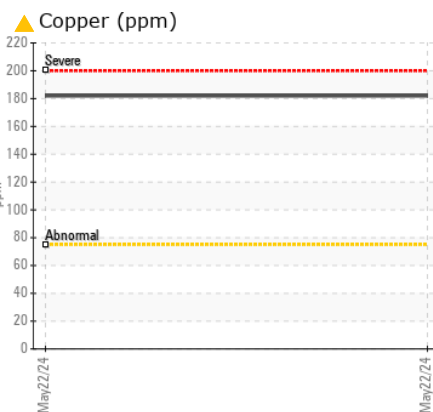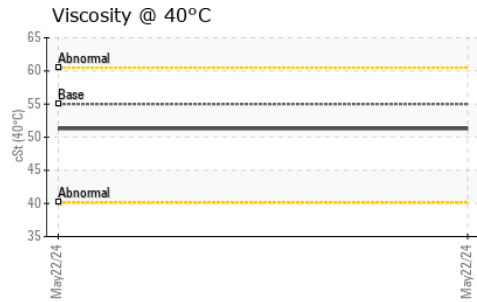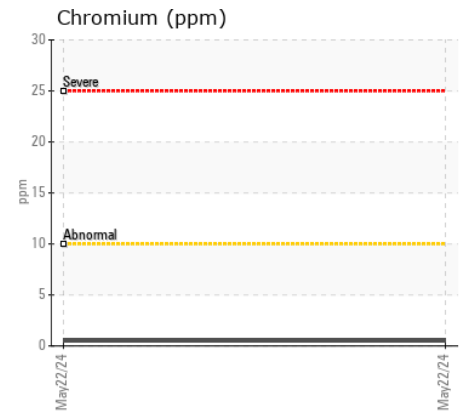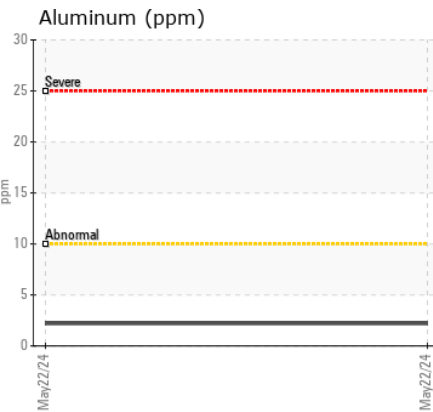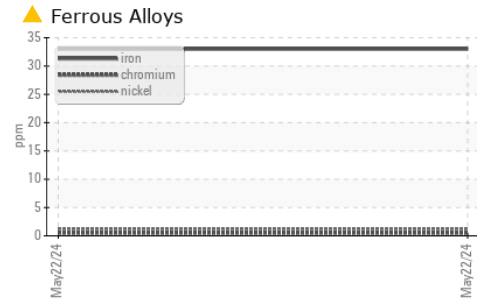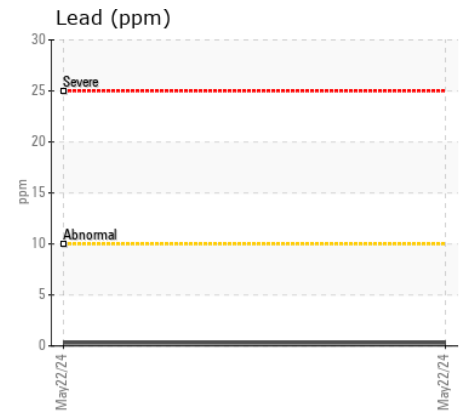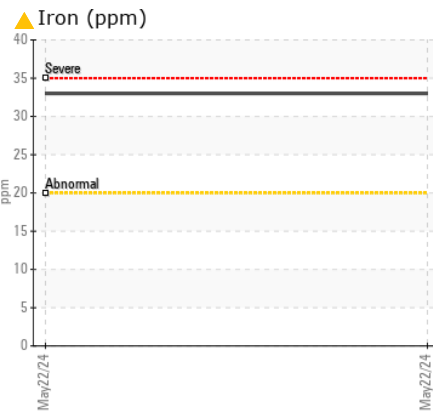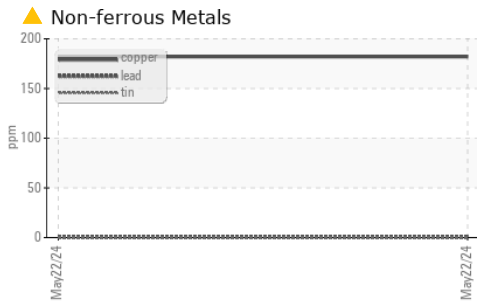

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : VCP450733

**Lab Number** : 06192554

**Unique Number** : 11049306

**Test Package** : MOB 1

**Received** : 28 May 2024

**Tested** : 30 May 2024

**Diagnosed** : 30 May 2024 - Don Baldrige

**ALTA EQUIPMENT COMPANY**

5210 REESE ROAD

DAVIE, FL

US 33314

Contact: N. FACEY

nfacey@altaequipfl.com

T: (954)581-4744

F: (954)583-0318

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)